

Reliability...

Dedication...

Integrity...

Quality...

Development...

Research...

Competence...

Guarantee...

Service....

Organization...

Professionalism...

Innovation...

Abrasivi Adria srl has always been focused on improving our product offering through the use of quality materials and the provision of highly qualified technical service designed to meet the specific needs of our customers.

Over the years, we have assembled an international team of highly skilled in-house trained engineers who operate efficiently on the main world markets. Through wholly-owned operations in the USA, Brazil, Spain, Greece, Poland, Turkey and India, Abrasivi Adria srl can provide prompt support towards solving all technical problems related to the processing of stone.

In line with this commitment, our chemical laboratories are engaged in ongoing research and are constantly striving to provide innovative, eco-friendly solutions through the use of low environmental impact raw materials.

This new catalogue is intended as a comprehensive guide covering the entire spectrum of know-how developed by us and is subdivided into sections that group together the various stone working processes.

Our engineers and sales team will be happy to answer all your questions and advise you on the best use of our products.

Honing & Polishing

● Multiple- and Single-head Automatic Machines	page 04
● Single-head Machines	page 15
● Straight Edges	page 27
● Bullnose Edges	page 41
● General Purpose (Straight and Bullnose Edges)	page 48
● Chamfering (Bevels)	page 49
● Floor Machines	page 51
● Accessories for Abrasives	page 56
● Manual Applications	page 59
● Grinders & Sanders	page 79

METAL BOND DIAMOND PLATES FOR HONING ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
035 86 105	36	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 108	36 C	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 115	40	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 118	40 C	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 125	50	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 128	50 C	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 135	60	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 138	60 C	Ø 150	M45 CN 24 teeth	KG 3.30
035 86 205	36	Ø 150	M45 CN 27 teeth	KG 3.30
035 86 208	36 C	Ø 150	M45 CN 27 teeth	KG 3.30
035 86 215	40	Ø 150	M45 CN 27 teeth	KG 3.30
035 86 218	40 C	Ø 150	M45 CN 27 teeth	KG 3.30
035 86 225	50	Ø 150	M45 CN 27 teeth	KG 3.30
035 86 228	50 C	Ø 150	M45 CN 27 teeth	KG 3.30
035 86 235	60	Ø 150	M45 CN 27 teeth	KG 3.30
035 86 238	60 C	Ø 150	M45 CN 27 teeth	KG 3.30



METAL BOND DIAMOND PLATES

Metal bond diamond plates, 150 mm in diameter, with M45 thread, with standard neck (long neck supplied on request) for honing granite.

Features:

These plates come in a variety of hardness grades and types and are used on the first heads, thanks to the high cutting action of the satellite system. Letter "C" identifies the most economical version

Types:

 HARD  MEDIUM

METAL BOND DIAMOND WHEELS FOR HONING ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	UNIT WEIGHT
035 84 001	R1	KG 5.30
035 84 021	R2	KG 5.30
035 84 041	R3	KG 5.30



SP 6 DIAMOND WHEELS

"SP 6" metal bond diamond wheels, 150 mm in diameter x 90 mm high, for honing granite.

Features:

Available in a variety of hardness grades, these wheels provide high cutting action and are designed to be used on the first heads only.

Types:

 HARD  MEDIUM

METAL BOND DIAMOND SECTORS FOR HONING ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	COLOURS	TYPE	PCS PER CASE	UNIT WEIGHT
035 88 520	30-40	black	D	6	KG 1.60
035 88 525	30-40	black	MD	6	KG 1.60
035 88 020	40-50	silver	D	6	KG 1.60
035 88 005	40-50	silver	MD	6	KG 1.60
035 88 025	40-50	silver	M	6	KG 1.60
035 88 010	40-50	silver	MT	6	KG 1.60
035 88 075	50-60	blue	D	6	KG 1.60
035 88 060	50-60	blue	MD	6	KG 1.60
035 88 080	50-60	blue	M	6	KG 1.60
035 88 065	50-60	blue	MD	6	KG 1.60
035 88 130	60-70	red	D	6	KG 1.60
035 88 115	60-70	red	MT	6	KG 1.60
035 88 135	60-70	red	M	6	KG 1.60
035 88 120	60-70	red	MT	6	KG 1.60
035 88 185	70-80	white	D	6	KG 1.60
035 88 170	70-80	white	MD	6	KG 1.60
035 88 190	70-80	white	M	6	KG 1.60
035 88 175	70-80	white	MT	6	KG 1.60
035 88 240	80-100	green	D	6	KG 1.60
035 88 225	80-100	green	MD	6	KG 1.60
035 88 245	80-100	green	M	6	KG 1.60
035 88 230	80-100	green	MT	6	KG 1.60
035 88 295	100-120	yellow	D	6	KG 1.60
035 88 280	100-120	yellow	MD	6	KG 1.60
035 88 300	100-120	yellow	M	6	KG 1.60
035 88 285	100-120	yellow	MT	6	KG 1.60
035 88 290	100-120	yellow	T	6	KG 1.60
035 88 350	120-140	orange	D	6	KG 1.60
035 88 335	120-140	orange	MD	6	KG 1.60
035 88 355	120-140	orange	M	6	KG 1.60
035 88 340	120-140	orange	MT	6	KG 1.60
035 88 345	120-140	orange	T	6	KG 1.60
035 88 405	140-170	pink	D	6	KG 1.60
035 88 390	140-170	pink	MD	6	KG 1.60
035 88 410	140-170	pink	M	6	KG 1.60
035 88 395	140-170	pink	MT	6	KG 1.60
035 88 400	140-170	pink	T	6	KG 1.60
035 88 425	140-170	pink	D-AD	6	KG 1.60
035 88 420	140-170	pink	MD-AD	6	KG 1.60
035 88 430	140-170	pink	M-AD	6	KG 1.60
035 88 435	140-170	pink	T-AD	6	KG 1.60
035 88 440	140-170	pink	D	6	KG 1.60
035 88 450	170-200	light blue	MD	6	KG 1.60
035 88 444	170-200	light blue	M	6	KG 1.60
035 88 455	170-200	light blue	MT	6	KG 1.60
035 88 447	170-200	light blue	T	6	KG 1.60
035 88 445	170-200	light blue	D-AD	6	KG 1.60
035 88 470	170-200	light blue	MD-AD	6	KG 1.60
035 88 464	170-200	light blue	M-AD	6	KG 1.60
035 88 475	170-200	light blue	MT-AD	6	KG 1.60
035 88 477	170-200	light blue	MT-AD	6	KG 1.60
035 88 480	200-230	light blue	T-AD	6	KG 1.60
035 88 495	200-230	brown	D	6	KG 1.60
035 88 492	200-230	brown	MD	6	KG 1.60
035 88 494	200-230	brown	M	6	KG 1.60
035 88 493	200-230	brown	MT	6	KG 1.60
035 88 490	200-230	brown	T	6	KG 1.60
035 88 505	200-230	brown	D-AD	6	KG 1.60
035 88 504	200-230	brown	MD-AD	6	KG 1.60
035 88 503	200-230	brown	M-AD	6	KG 1.60
035 88 350	200-230	brown	MT-AD	6	KG 1.60
035 88 350	200-230	brown	T-AD	6	KG 1.60



METAL BOND DIAMOND SECTORS

Metal bond diamond sectors, 130 mm in size, for honing granite

Features:

In addition to being available in a wide range of grits to fit any machine, the fine-grit grades come in two different styles, i.e. traditional or rounded. The rounded model (identified by the initials "AD") has been developed specifically to minimize the risk of the granite being scratched by pointed or sharp edges that may form on the surface of the tool during work (due to wrong mounting, breaking of the granite, etc.).

Types:



HONING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	TYPE	PCS PER CASE	UNIT WEIGHT
005 07 003	16	K	20	KG 1.008
005 07 005	16	D	20	KG 1.008
005 07 009	24	K	20	KG 1.008
005 07 011	24	D	20	KG 1.008
005 07 015	36	K	20	KG 1.008
005 07 017	36	D	20	KG 1.008
005 07 021	46	K	20	KG 1.008
005 07 023	46	D	20	KG 1.008
005 07 031	60	CK	20	KG 1.008
005 07 027	60	K	20	KG 1.008
005 07 029	60	D	20	KG 1.008
005 07 039	80	CK	20	KG 1.008
005 07 035	80	K	20	KG 1.008
005 07 037	80	D	20	KG 1.008
005 07 047	100	CK	20	KG 1.008
005 07 043	100	K	20	KG 1.008
005 07 045	100	D	20	KG 1.008
005 07 057	120	CK	20	KG 1.008
005 07 051	120	K	20	KG 1.008
005 07 053	120	D	20	KG 1.008
005 07 065	150	CK	20	KG 1.008
005 07 061	150	K	20	KG 1.008
005 07 063	150	D	20	KG 1.008
005 07 073	180	CK	20	KG 1.008
005 07 069	180	K	20	KG 1.008
005 07 071	180	D	20	KG 1.008
005 07 081	220	CK	20	KG 1.008
005 07 077	220	K	20	KG 1.008
005 07 079	220	D	20	KG 1.008
005 07 095	280	CK	20	KG 1.008
005 07 091	280	K	20	KG 1.008
005 07 093	280	D	20	KG 1.008
005 07 103	320	CK	20	KG 1.008
005 07 099	320	K	20	KG 1.008
005 07 101	320	D	20	KG 1.008
005 07 111	400	CK	20	KG 1.008
005 07 107	400	L	20	KG 1.008
005 07 109	400	D	20	KG 1.008
005 07 119	600	CK	20	KG 1.008
005 07 115	600	Z	20	KG 1.008
005 07 117	600	D	20	KG 1.008
005 07 131	800	CK	20	KG 1.008
005 07 123	800	L	20	KG 1.008
005 07 127	800	D	20	KG 1.008
005 07 141	1000	CK	20	KG 1.008
005 07 135	1000	L	20	KG 1.008
005 07 139	1000	D	20	KG 1.008
005 07 151	1200	CK	20	KG 1.008
005 07 145	1200	L	20	KG 1.008
005 07 149	1200	D	20	KG 1.008
005 07 157	1500	CK	20	KG 1.008
005 07 155	1500	L	20	KG 1.008



140 MM MAGNESITE SECTORS

Magnesite sectors, 140 mm in size, for honing and pre-polishing granite.

Features:

Available in a variety of grits to ensure excellent cutting performance and consistent product quality.

Types:

			
VERY HARD DD	HARD D	MEDIUM K-L-Z	SOFT CK

HONING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	TYPE	PCS PER CASE	UNIT WEIGHT
005 01 002	16	K	20	KG 1.012
005 01 001	16	D	20	KG 1.012
005 01 004	24	K	20	KG 1.012
005 01 003	24	D	20	KG 1.012
005 01 006	36	K	20	KG 1.012
005 01 005	36	D	20	KG 1.012
005 01 008	46	K	20	KG 1.012
005 01 007	46	D	20	KG 1.012
005 01 010	60	K	20	KG 1.012
005 01 009	60	D	20	KG 1.012
005 01 012	80	K	20	KG 1.012
005 01 011	80	D	20	KG 1.012
005 01 014	100	K	20	KG 1.012
005 01 013	100	D	20	KG 1.012
005 01 016	120	K	20	KG 1.012
005 01 015	120	D	20	KG 1.012
005 01 018	150	K	20	KG 1.012
005 01 017	150	D	20	KG 1.012
005 01 020	180	K	20	KG 1.012
005 01 019	180	D	20	KG 1.012
005 01 022	220	K	20	KG 1.012
005 01 021	220	D	20	KG 1.012
005 01 026	280	K	20	KG 1.012
005 01 025	280	D	20	KG 1.012
005 01 028	320	K	20	KG 1.012
005 01 027	320	D	20	KG 1.012
005 01 030	400	L	20	KG 1.012
005 01 029	400	D	20	KG 1.012
005 01 032	600	Z	20	KG 1.012
005 01 031	600	D	20	KG 1.012
005 01 034	800	L	20	KG 1.012
005 01 033	800	D	20	KG 1.012
005 01 036	1000	L	20	KG 1.012
005 01 035	1000	D	20	KG 1.012
005 01 038	1200	L	20	KG 1.012
005 01 037	1200	D	20	KG 1.012
005 01 039	1500	L	20	KG 1.012



130 MM MAGNESITE SECTORS WITH PEDRINI FITTING
Magnesite sectors, 130 mm in size, with Pedrini fitting, for honing and pre-polishing granite.

Features:

Available in a variety of grits to ensure excellent cutting performance and consistent product quality.

Types:



HONING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 19 001	16	16	KG 1.076
005 19 003	24	16	KG 1.076
005 19 005	36	16	KG 1.076
005 19 007	46	16	KG 1.076
005 19 009	60	16	KG 1.076
005 19 011	80	16	KG 1.076
005 19 013	100	16	KG 1.076
005 19 015	120	16	KG 1.076
005 19 017	180	16	KG 1.076
005 19 019	220	16	KG 1.076
005 19 021	280	16	KG 1.076
005 19 023	320	16	KG 1.076
005 19 025	400	16	KG 1.076
005 19 027	600	16	KG 1.076
005 19 029	800	16	KG 1.076
005 19 031	1000	16	KG 1.076
005 19 033	1200	16	KG 1.076
005 19 035	1500	16	KG 1.076



130 MM MAGNESITE SECTORS WITH PEDRINI FITTING

Magnesite sectors, 130 mm in size, with Pedrini fitting for honing and pre-polishing granite.

Features:

Available in a variety of grits to ensure excellent cutting performance and consistent product quality.

Types:



SOFT

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 09 001	16	20	KG 0.900
005 09 003	24	20	KG 0.900
005 09 005	36	20	KG 0.900
005 09 007	46	20	KG 0.900
005 09 009	60	20	KG 0.900
005 09 011	80	20	KG 0.900
005 09 013	100	20	KG 0.900
005 09 015	120	20	KG 0.900
005 09 017	150	20	KG 0.900
005 09 019	180	20	KG 0.900
005 09 021	220	20	KG 0.900
005 09 025	280	20	KG 0.900
005 09 027	320	20	KG 0.900
005 09 031	400	20	KG 0.900
005 09 033	600	20	KG 0.900
005 09 035	800	20	KG 0.900
005 09 037	1000	20	KG 0.900
005 09 039	1200	20	KG 0.900
005 09 041	1500	20	KG 0.900



EXPRESS 140 MM PHENOLIC BOND SYNTHETIC SECTORS

"Express" phenolic bond synthetic sectors, 140 mm in size, for honing and pre-polishing granite.

Features:

These abrasives ensure excellent cutting performance and consistent product quality. Additionally, this type of binder provides stability over time, which results in increased storage life.

Types:



HARD

HONING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	UNIT WEIGHT
005 09 115	Q1	KG 0.900
005 09 120	Q2	KG 0.900



EXPRESS 140 MM PHENOLIC BOND SYNTHETIC SECTORS FOR REMOVING RESIN

"Express" phenolic bond synthetic sectors, 140 mm in size, designed to remove epoxy systems from granite surfaces.

Features:

Thanks to their formulation, these sectors achieve an even removal of the resin without scratching the surface of the granite.

Types:

 MEDIUM

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 11 007	40	20	KG 0.884
005 11 009	60	20	KG 0.884
005 11 011	80	20	KG 0.884
005 11 015	120	20	KG 0.884
005 11 017	150	20	KG 0.884
005 11 019	180	20	KG 0.884
005 11 021	220	20	KG 0.884
005 11 025	280	20	KG 0.884
005 11 027	320	20	KG 0.884



140 MM POLYESTER SYNTHETIC SECTORS WITH SPHERES

Polyester synthetic sectors, 140 mm in size, model "C.P." (with spheres), for honing granite.

Features:

These abrasives are especially recommended for removing epoxy systems from granite slabs, as they combine excellent cutting ability with superior tool life.

Types:

 HARD

HONING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	UNIT WEIGHT
001 01 000	24	KG 0.422
001 01 001	36	KG 0.422
001 01 003	46	KG 0.422
001 01 004	60	KG 0.422
001 01 005	80	KG 0.422
001 01 010	100	KG 0.422
001 01 015	120	KG 0.422
001 01 020	150	KG 0.422
001 01 025	180	KG 0.422
001 01 030	220	KG 0.422
001 01 035	240	KG 0.422
001 01 040	280	KG 0.422
001 01 045	320	KG 0.422
001 01 050	400	KG 0.422
001 01 055	600	KG 0.422
001 01 060	800	KG 0.422
001 01 065	1000	KG 0.422
001 01 070	1200	KG 0.422
001 01 075	1500	KG 0.422
001 01 080	1800	KG 0.422
001 01 085	2000	KG 0.422
001 01 090	2200	KG 0.422
001 01 095	2600	KG 0.422
001 01 100	3000	KG 0.422



ADRIALUX 140 MM LOW-PROFILE DIAMOND SECTORS

"Adrialux" synthetic bond low-profile diamond sectors, 140 mm in size. These abrasives ensure perfect honing and pre-polishing on all types of granite.


Features:

These abrasives offer remarkable advantages, namely: very high cutting efficiency, very long life resulting in reduced downtime for abrasive change, no problems due to ageing of the binder and very low weight, which means a drastic reduction in transport costs.

Types:



CODE	GRITS	UNIT WEIGHT
001 01 102	24	KG 0.546
001 01 103	36	KG 0.546
001 01 104	46	KG 0.546
001 01 105	60	KG 0.546
001 01 110	80	KG 0.546
001 01 115	100	KG 0.546
001 01 120	120	KG 0.546
001 01 125	150	KG 0.546
001 01 130	180	KG 0.546
001 01 135	220	KG 0.546
001 01 140	240	KG 0.546
001 01 145	280	KG 0.546
001 01 150	320	KG 0.546
001 01 155	400	KG 0.546
001 01 160	600	KG 0.546
001 01 165	800	KG 0.546
001 01 170	1000	KG 0.546
001 01 175	1200	KG 0.546
001 01 180	1500	KG 0.546
001 01 185	1800	KG 0.546
001 01 190	2000	KG 0.546
001 01 195	2200	KG 0.546
001 01 200	2600	KG 0.546
001 01 205	3000	KG 0.546

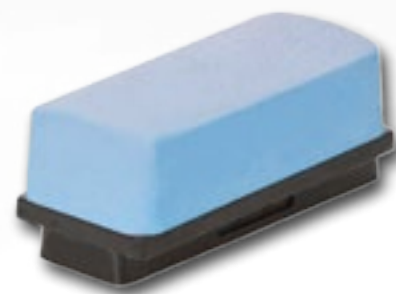

ADRIALUX 140 MM HIGH-PROFILE DIAMOND SECTORS

"Adrialux" synthetic bond high-profile diamond sectors, 140 mm in size. These abrasives ensure perfect honing and pre-polishing on all types of granite.

Features:

They offer the same advantages as the low-profile model, plus a remarkably longer life thanks to a greater depth of abrasive medium.

Types:



HONING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	UNIT WEIGHT
001 01 500	1	KG 0.470
001 01 502	2	KG 0.470
001 01 504	3	KG 0.470
001 01 506	4	KG 0.470
001 01 508	5	KG 0.470
001 01 510	6	KG 0.470



ADRIALUX 140 MM HIGH-PROFILE DIAMOND SECTORS FOR REMOVING RESIN

"Adrialux" synthetic bond high-profile diamond sectors, 140 mm in size, designed specifically to remove epoxy systems from granite surfaces.

Features:

Thanks to their special formulation and segmented shape, these segments achieve an even removal of the resin, without scraping it away from the tiniest fissures in the granite.

Types:

■ HARD
 ■ MEDIUM
 ■ SOFT

CODE	GRITS	UNIT WEIGHT
001 01 292	24	KG 0.798
001 01 293	36	KG 0.798
001 01 294	46	KG 0.798
001 01 295	60	KG 0.798
001 01 300	80	KG 0.798
001 01 305	100	KG 0.798
001 01 310	120	KG 0.798
001 01 315	150	KG 0.798
001 01 320	180	KG 0.798
001 01 325	220	KG 0.798
001 01 330	240	KG 0.798
001 01 335	280	KG 0.798
001 01 340	320	KG 0.798
001 01 345	400	KG 0.798
001 01 350	600	KG 0.798
001 01 355	800	KG 0.798
001 01 357	1000	KG 0.798
001 01 360	1200	KG 0.798
001 01 365	1500	KG 0.798
001 01 366	1800	KG 0.798
001 01 367	2000	KG 0.798
001 01 368	2200	KG 0.798
001 01 369	2600	KG 0.798
001 01 370	3000	KG 0.798



ADRIALUX 170 MM HIGH-PROFILE DIAMOND SECTORS

"Adrialux" synthetic bond high-profile diamond sectors, 140 mm in size, for honing and pre-polishing all types of granite.

Features:

These abrasives offer the same advantages as the low-profile model, plus a remarkably longer life thanks to a greater depth of abrasive medium.

Types:

■ HARD
 ■ MEDIUM
 ■ SOFT

POLISHING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 15 041	30	KG 0.622



140 MM LOW-PROFILE POLISHING SECTORS

Synthetic low-profile polishing sectors, 140 mm in size, for achieving a perfect polish on granite.

Features:

These sectors are recommended for use with old machines or on brittle granite surfaces, because the low-profile of the segment helps to prevent breakage of the abrasive. There is also a styrene-free version (ST), which offers the same excellent degree of polish.

Types:

HARD
 MEDIUM
 SOFT

CODE	PCS PER CASE	UNIT WEIGHT
005 15 001	20	KG 0.856



140 MM HIGH-PROFILE POLISHING SECTORS

Synthetic high-profile polishing sectors, 140 mm in size, for achieving a perfect polish on granite.

Features:

There is also a styrene-free version (ST), which offers the same excellent degree of polish.

Types:

HARD
 MEDIUM
 SOFT

POLISHING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 05 001	20	KG 0.906



130 MM HIGH-PROFILE POLISHING SECTORS WITH PE-DRINI FITTING

Synthetic high-profile polishing sectors, 130 mm in size, for achieving a perfect polish on granite.

Types:



CODE	PCS PER CASE	UNIT WEIGHT
005 05 001	16	KG 0.883



170 MM LOW-PROFILE POLISHING SECTORS

Synthetic low-profile polishing sectors, 170 mm in size, for achieving a perfect polish on granite.

Features:

These sectors are recommended for use with old machines, or on brittle granite surfaces, because the low-profile of the segment helps to prevent breakage of the abrasive.

Types:



POLISHING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 23 001	16	KG 1.180



170 MM HIGH-PROFILE POLISHING SECTORS

Synthetic high-profile polishing sectors, 170 mm in size, for achieving a perfect polish on granite.

Types:

■ HARD
 ■ MEDIUM
 ● SOFT

HONING SECTORS FOR USE ON MULTIPLE- OR SINGLE-HEAD AUTOMATIC MACHINES

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
001 07 010	60	6	KG 0.205
001 07 015	80	6	KG 0.205
001 07 020	120	6	KG 0.205
001 07 025	180	6	KG 0.205
001 07 030	220	6	KG 0.205
001 07 035	320	6	KG 0.205
001 07 040	400	6	KG 0.205
001 07 045	600	6	KG 0.205
001 07 050	800	6	KG 0.205



ADRIALAP 130 MM DIAMOND SECTORS

Adrialap diamond sectors, 130 mm in size, ideal for achieving an even honed finish on granite, without leaving marks on the surface.

Features:

Besides removing the scratch marks left by previous grits, these abrasives enhance the colour of the stone.

METAL BOND DIAMOND HONING PLATES FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	OUTER DIAMETER	UNIT WEIGHT
035 82 031	40	250 mm	KG 4.800
035 82 033	50	250 mm	KG 4.800
035 82 035	150	250 mm	KG 4.800



METAL BOND DIAMOND SEGMENTED PLATES

Metal bond diamond segmented plates for honing granite using a single-head machine (radial arm machine).

HONING PLATES FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	OUTER DIAMETER	UNIT WEIGHT
005 45 051	16	250 mm	KG 3.043
005 45 053	24	250 mm	KG 3.043
005 45 055	36	250 mm	KG 3.043
005 45 056	46	250 mm	KG 3.043
005 45 057	60	250 mm	KG 3.043
005 45 059	120	250 mm	KG 3.043
005 45 061	220	250 mm	KG 3.043
005 45 063	320	250 mm	KG 3.043
005 45 065	400	250 mm	KG 3.043
005 45 067	600	250 mm	KG 3.043
005 45 069	800	250 mm	KG 3.043
005 45 071	1200	250 mm	KG 3.043



MAGNESITE PLATES

Magnesite plates for honing and pre-polishing granite on a single-head machine (radial arm machine). Their peculiar shape provides increased cutting performance.

HONING PLATES FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
005 47 001	16	250 mm	6 sectors	KG 2.631
005 47 003	24	250 mm	6 sectors	KG 2.631
005 47 005	36	250 mm	6 sectors	KG 2.631
005 47 007	46	250 mm	6 sectors	KG 2.631
005 47 009	60	250 mm	6 sectors	KG 2.631
005 47 011	120	250 mm	6 sectors	KG 2.631
005 47 013	220	250 mm	6 sectors	KG 2.631
005 47 015	320	250 mm	6 sectors	KG 2.631



EXPRESS SYNTHETIC PHENOLIC BOND PLATES

"Express" synthetic bond plates for honing granite on a single head machine (radial arm machine); segmented shape for longer life.

HONING PLATES FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	OUTER DIAMETER	FITTING	UNIT WEIGHT
001 10 002	36	220 mm	Velcro QRS	KG 0.640
001 10 003	46	220 mm	Velcro QRS	KG 0.640
001 10 004	60	220 mm	Velcro QRS	KG 0.640
001 10 005	80	220 mm	Velcro QRS	KG 0.640
001 10 010	120	220 mm	Velcro QRS	KG 0.640
001 10 015	220	220 mm	Velcro QRS	KG 0.640
001 10 020	320	220 mm	Velcro QRS	KG 0.640
001 10 025	400	220 mm	Velcro QRS	KG 0.640
001 10 030	600	220 mm	Velcro QRS	KG 0.640
001 10 035	800	220 mm	Velcro QRS	KG 0.640
001 10 040	1500	220 mm	Velcro QRS	KG 0.640
001 10 045	3000	220 mm	Velcro QRS	KG 0.640
001 10 050	5000	220 mm	Velcro QRS	KG 0.640
001 10 055	8000	220 mm	Velcro QRS	KG 0.640
001 10 060	36	220 mm	snail lock	KG 1.115
001 10 065	46	220 mm	snail lock	KG 1.115
001 10 070	60	220 mm	snail lock	KG 1.115
001 10 075	80	220 mm	snail lock	KG 1.115
001 10 080	120	220 mm	snail lock	KG 1.115
001 10 085	220	220 mm	snail lock	KG 1.115
001 10 090	320	220 mm	snail lock	KG 1.115
001 10 095	400	220 mm	snail lock	KG 1.115
001 10 100	600	220 mm	snail lock	KG 1.115
00110 105	800	220 mm	snail lock	KG 1.115
00110 110	1500	220 mm	snail lock	KG 1.115
00110 115	3000	220 mm	snail lock	KG 1.115
00110 120	5000	220 mm	snail lock	KG 1.115
00110 125	8000	220 mm	snail lock	KG 1.115
001 10 132	36	220 mm	magnetic	KG 1.717
001 10 133	46	220 mm	magnetic	KG 1.717
001 10 135	60	220 mm	magnetic	KG 1.717
001 10 140	80	220 mm	magnetic	KG 1.717
001 10 145	120	220 mm	magnetic	KG 1.717
001 10 150	220	220 mm	magnetic	KG 1.717



ADRIALUX DIAMOND PLATES

"Adrialux" synthetic bond diamond plates available with different types of fittings (QRS Velcro backing, snail lock or magnetic) for honing and pre-polishing granite.

Features:

The advantage offered by these abrasives is that they can also be used to hone or pre-polish natural and agglomerate marble, stone and onyx.

CODE	GRITS	OUTER DIAMETER	FITTING	UNIT WEIGHT
001 10 155	320	220 mm	magnetic	KG 1.717
001 10 160	400	220 mm	magnetic	KG 1.717
001 10 165	600	220 mm	magnetic	KG 1.717
001 10 170	800	220 mm	magnetic	KG 1.717
001 10 175	1500	220 mm	magnetic	KG 1.717
001 10 180	3000	220 mm	magnetic	KG 1.717
001 10 185	5000	220 mm	magnetic	KG 1.717
001 10 190	8000	220 mm	magnetic	KG 1.717

POLISHING PLATES FOR USE ON SINGLE-HEAD MACHINES

CODE	OUTER DIAMETER	UNIT WEIGHT
005 53 011	250mm	KG 3.160



POLISHING PLATES

Segmented polishing plates for polishing granite on a single head machine (radial arm machine).

METAL BOND DIAMOND FRANKFURT BRICKS FOR HONING ON SINGLE-HEAD MACHINES

CODE	GRITS	SECTORS	SECTOR SHAPE	UNIT WEIGHT
035 90 402	A0 (16) dark grey	8	round ø14 mm	KG 1.136
035 90 404	A1 (24) black	8	round ø14 mm	KG 1.136
035 90 406	A2 (36) brown	8	round ø14 mm	KG 1.136
035 90 408	A3 (46) grey	8	round ø14 mm	KG 1.136
035 90 410	A4 (60) blue	8	round ø14 mm	KG 1.136
035 90 412	A5 (80) light blue	8	round ø14 mm	KG 1.136



METAL BOND DIAMOND FRANKFURT BRICKS

Metal bond diamond Frankfurt bricks, suitable for honing granite.

Features:

The peculiar geometries and arrangement of the circular sectors provide very high cutting efficiency.

Types:



HARD MEDIUM SOFT

FRANKFURT BRICKS FOR HONING ON SINGLE-HEAD MACHINES

CODE	GRITS	TYPE	PCS PER CASE	UNIT WEIGHT
005 25 003	16	N	36	KG 0.610
005 25 009	24	N	36	KG 0.610
005 25 015	36	N	36	KG 0.610
005 25 021	46	N	36	KG 0.610
005 25 027	60	N	36	KG 0.610
005 25 033	80	N	36	KG 0.610
005 25 039	100	N	36	KG 0.610
005 25 045	120	N	36	KG 0.610
005 25 051	150	N	36	KG 0.610
005 25 057	180	N	36	KG 0.610
005 25 063	220	N	36	KG 0.610
005 25 069	280	N	36	KG 0.610
005 25 075	320	N	36	KG 0.610
005 25 081	400	N	36	KG 0.610
005 25 087	600	N	36	KG 0.610
005 25 093	800	N	36	KG 0.610
005 25 105	1200	N	36	KG 0.610



MAGNESITE FRANKFURT VERONA BRICKS

Magnesite bond Frankfurt Verona bricks made of silicon carbide for honing and pre-polishing granite.

Features:

These abrasives offer good cutting performance at a reasonable cost.

Types:



MEDIUM
N

FRANKFURT BRICKS FOR HONING ON SINGLE-HEAD MACHINES

CODE	GRITS	TYPE	PCS PER CASE	UNIT WEIGHT
005 27 003	16	L	36	KG 0.600
005 27 005	16	TT	36	KG 0.600
005 27 007	16	T	36	KG 0.600
005 27 009	16	N	36	KG 0.600
005 27 017	24	L	36	KG 0.600
005 27 019	24	TT	36	KG 0.600
005 27 021	24	T	36	KG 0.600
005 27 023	24	N	36	KG 0.600
005 27 031	36	L	36	KG 0.600
005 27 033	36	TT	36	KG 0.600
005 27 035	36	T	36	KG 0.600
005 27 037	36	N	36	KG 0.600
005 27 045	46	L	36	KG 0.600
005 27 047	46	TT	36	KG 0.600
005 27 049	46	T	36	KG 0.600
005 27 051	46	N	36	KG 0.600
005 27 059	60	L	36	KG 0.600
005 27 061	60	TT	36	KG 0.600
005 27 063	60	T	36	KG 0.600
005 27 065	60	N	36	KG 0.600
005 27 073	80	L	36	KG 0.600
005 27 075	80	TT	36	KG 0.600
005 27 077	80	T	36	KG 0.600
005 27 079	80	N	36	KG 0.600
005 27 087	100	L	36	KG 0.600
005 27 089	100	TT	36	KG 0.600
005 27 091	100	T	36	KG 0.600
005 27 093	100	N	36	KG 0.600
005 27 101	120	L	36	KG 0.600
005 27 103	120	TT	36	KG 0.600
005 27 105	120	T	36	KG 0.600
005 27 107	120	N	36	KG 0.600
005 27 115	150	L	36	KG 0.600
005 27 117	150	TT	36	KG 0.600
005 27 119	150	T	36	KG 0.600
005 27 121	150	N	36	KG 0.600
005 27 129	180	L	36	KG 0.600
005 27 131	180	TT	36	KG 0.600
005 27 133	180	T	36	KG 0.600
005 27 135	180	N	36	KG 0.600
005 27 143	220	L	36	KG 0.600
005 27 145	220	TT	36	KG 0.600
005 27 147	220	T	36	KG 0.600
005 27 149	220	N	36	KG 0.600
005 27 157	240	L	36	KG 0.600
005 27 159	240	TT	36	KG 0.600
005 27 161	240	T	36	KG 0.600
005 27 163	240	N	36	KG 0.600
005 27 171	280	L	36	KG 0.600
005 27 173	280	TT	36	KG 0.600
005 27 175	280	T	36	KG 0.600
005 27 177	280	N	36	KG 0.600
005 27 185	320	L	36	KG 0.600
005 27 187	320	TT	36	KG 0.600
005 27 189	320	T	36	KG 0.600
005 27 191	320	N	36	KG 0.600



EXPRESS SYNTHETIC FRANKFURT VERONA BRICKS IN A PHENOLIC BINDER

"Express" synthetic bond Frankfurt Verona style bricks made of silicon carbide, for honing granite.


Features:

These abrasives combine excellent cutting properties with a controlled curing and stabilization process.
Store in a non-humid environment.

Types:



CODE	GRITS	UNIT WEIGHT
001 30 001	40	KG 0.200
001 30 005	60	KG 0.200
001 30 010	80	KG 0.200
001 30 012	100	KG 0.200
001 30 015	120	KG 0.200
001 30 020	150	KG 0.200
001 30 025	180	KG 0.200
001 30 030	220	KG 0.200
001 30 035	280	KG 0.200
001 30 040	320	KG 0.200
001 30 045	400	KG 0.200
001 30 047	500	KG 0.200
001 30 050	600	KG 0.200
001 30 055	800	KG 0.200
001 30 060	1000	KG 0.200
001 30 065	1200	KG 0.200
001 30 070	1500	KG 0.200
001 30 075	3000	KG 0.200
001 30 080	5000	KG 0.200
001 30 085	6000	KG 0.200
001 30 090	8000	KG 0.200
001 30 095	10.000	KG 0.200

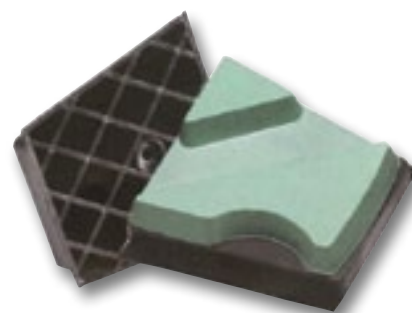

ADRIALUX LOW-PROFILE DIAMOND FRANKFURT BRICKS

"Adrialux" synthetic bond low-profile diamond Frankfurt bricks, ideal for honing and pre-polishing granite.

Features:

These abrasives offer remarkable advantages in the processing of the above material, namely: very high cutting efficiency, very long life resulting in reduced downtime for abrasive change, no problems due to ageing of the binder and very low weight, which allows for a drastic reduction in transport costs. They are also suitable for honing and pre-polishing natural and agglomerate marble, stone and onyx.

Types:

■ HARD
 ■ MEDIUM
 ● SOFT

CODE	GRITS	UNIT WEIGHT
001 30 100	40	KG 0.396
001 30 105	60	KG 0.396
001 30 110	80	KG 0.396
001 30 112	100	KG 0.396
001 30 115	120	KG 0.396
001 30 120	150	KG 0.396
001 30 122	180	KG 0.396
001 30 125	220	KG 0.396
001 30 130	280	KG 0.396
001 30 135	320	KG 0.396
001 30 140	400	KG 0.396
001 30 142	500	KG 0.396
001 30 145	600	KG 0.396
001 30 150	800	KG 0.396
001 30 155	1000	KG 0.396
001 30 160	1200	KG 0.396
001 30 165	1500	KG 0.396
001 30 170	3000	KG 0.396
001 30 175	5000	KG 0.396
001 30 180	6000	KG 0.396
001 30 185	8000	KG 0.396
001 30 190	10.000	KG 0.396



ADRIALUX HIGH-PROFILE DIAMOND FRANKFURT BRICKS

"Adrialux" synthetic bond high-profile diamond Frankfurt bricks, ideal for honing and pre-polishing granite.

Features:

These bricks offer the same advantages as the low-profile model, plus a remarkably longer life thanks to a greater depth of abrasive medium.

Types:

■ HARD
 ■ MEDIUM
 ● SOFT

FRANKFURT POLISHING BRICKS FOR USE ON SINGLE-HEAD MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 39 001	36	KG 0.575



FRANKFURT POLISHING BRICKS FOR GRANITE
Frankfurt Verona style bricks for polishing granite.

Types:

●
SOFT

FRANKFURT HONING BRICKS FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	UNIT WEIGHT
001 37 020	120	KG 0.243
001 37 025	180	KG 0.243
001 37 030	220	KG 0.243
001 37 035	320	KG 0.243
001 37 040	400	KG 0.243

**ADRIALAP FRANKFURT DIAMOND BRICKS**

"Adrialap" Frankfurt diamond bricks, ideal for achieving an even honed finish on granite, without leaving marks on the surface.

Features:

Besides giving the surface a uniform texture, these bricks will enhance the colour of the stone.

MÜNCHEN ABRASIVES FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 55 001	16	45	KG 0.465
005 55 005	24	45	KG 0.465
005 55 007	36	45	KG 0.465
005 55 009	46	45	KG 0.465
005 55 011	60	45	KG 0.465
005 55 013	120	45	KG 0.465
005 55 015	220	45	KG 0.465
005 55 017	320	45	KG 0.465
005 55 019	400	45	KG 0.465
005 55 021	600	45	KG 0.465
005 55 023	800	45	KG 0.465
005 55 025	1200	45	KG 0.465



MÜNCHEN MAGNESITE ABRASIVES

München style magnesite bond segments made of silicon carbide, suitable for honing and pre-polishing granite.

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 57 001	16	45	KG 0.430
005 57 003	24	45	KG 0.430
005 57 005	36	45	KG 0.430
005 57 007	46	45	KG 0.430
005 57 009	60	45	KG 0.430
005 57 011	80	45	KG 0.430
005 57 013	120	45	KG 0.430
005 57 015	220	45	KG 0.430
005 57 017	320	60	KG 0.430



EXPRESS MÜNCHEN PHENOLIC BOND SYNTHETIC ABRASIVES

"Express" München style synthetic bond segments made of silicon carbide, suitable for honing granite.

Features:

These abrasives combine excellent cutting properties with a controlled curing and stabilization process. Store in a non-humid environment.

MÜNCHEN POLISHING SECTORS FOR USE ON SINGLE-HEAD MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 63 001	60	KG 0.420



MÜNCHEN POLISHING SEGMENTS

München style polishing segments for polishing granite.

TERZAGO STYLE WHEELS FOR HONING ON SINGLE-HEAD MACHINES

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 77 071	16	18	KG 1.331
005 77 073	24	18	KG 1.331
005 77 075	36	18	KG 1.331
005 77 076	46	18	KG 1.331
005 77 077	60	18	KG 1.331
005 77 079	120	18	KG 1.331
005 77 081	180	18	KG 1.331
005 77 083	220	18	KG 1.331
005 77 085	320	18	KG 1.331
005 77 087	400	18	KG 1.331
005 77 089	600	18	KG 1.331
005 77 091	800	18	KG 1.331
005 77 093	1000	18	KG 1.331
005 77 095	1200	18	KG 1.331



130 MM MAGNESITE WHEELS WITH TERZAGO FITTING

Magnesite wheels, 130 mm in diameter, with Terzago fitting, for honing and pre-polishing granite.

TERZAGO STYLE POLISHING WHEELS FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	UNIT WEIGHT
001 25 263	36	KG 0.308
001 25 264	46	KG 0.308
001 25 265	60	KG 0.308
001 25 270	80	KG 0.308
001 25 275	120	KG 0.308
001 25 280	150	KG 0.308
001 25 285	220	KG 0.308
001 25 290	320	KG 0.308
001 25 295	400	KG 0.308
001 25 300	600	KG 0.308
001 25 305	800	KG 0.308
001 25 310	1000	KG 0.308
001 25 315	1500	KG 0.308
001 25 320	3000	KG 0.308
001 25 325	5000	KG 0.308



ADRIALUX 130 MM DIAMOND WHEELS WITH TERZAGO FITTING

Adrialux diamond wheels, 130 mm in diameter, with Terzago fitting, for honing and pre-polishing granite.

Features:

These abrasives offer remarkable advantages in the processing of granite, namely: very high cutting efficiency, very long life, no ageing of the binder and very low weight, which means a drastic reduction in transport costs.

TERZAGO STYLE POLISHING WHEELS FOR USE ON SINGLE-HEAD MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 79 011	30	KG 0.780



130 MM LOW-PROFILE POLISHING WHEELS WITH TERZAGO FITTING

Low-profile polishing wheels, 130 mm in diameter, with Terzago fitting, for polishing granite.

60 MM HONING BLOCKS FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 81 001	16	60	KG 0.239
005 81 003	24	60	KG 0.239
005 81 005	36	60	KG 0.239
005 81 006	46	60	KG 0.239
005 81 007	60	60	KG 0.239
005 81 009	120	60	KG 0.239
005 81 011	220	60	KG 0.239
005 81 013	320	60	KG 0.239
005 81 015	400	60	KG 0.239
005 81 017	600	60	KG 0.239
005 81 019	800	60	KG 0.239
005 81 021	1000	60	KG 0.239
005 81 023	1200	60	KG 0.239



60 MM MAGNESITE HONING BLOCKS

60 mm magnesite blocks for honing and pre-polishing granite.

CODE	GRITS	UNIT WEIGHT
001 40 001	60	KG 0.180
001 40 005	80	KG 0.180
001 40 010	120	KG 0.180
001 40 015	180	KG 0.180
001 40 020	220	KG 0.180
001 40 025	280	KG 0.180
001 40 030	320	KG 0.180
001 40 035	400	KG 0.180
001 40 040	500	KG 0.180
001 40 045	600	KG 0.180
001 40 050	800	KG 0.180
001 40 055	1500	KG 0.180
001 40 060	3000	KG 0.180
001 40 065	5000	KG 0.180



ADRIALUX 60 MM DIAMOND HONING BLOCKS

"Adrialux" diamond honing blocks, 60 mm in size, available in a variety of grits, for honing and pre-polishing granite.

Features:

These abrasives offer remarkable advantages in the processing of granite, namely: very high cutting efficiency, very long life, no ageing of the binder and very low weight, which means a drastic reduction in transport costs.

60 MM POLISHING BLOCKS FOR USE ON SINGLE-HEAD MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 85 001	60	KG 0.243



60 MM POLISHING BLOCKS

Synthetic polishing blocks, 60 mm in size, for achieving a perfect polish on granite.

90 MM HONING AND POLISHING BLOCKS FOR USE ON SINGLE-HEAD MACHINES

CODE	GRITS	UNIT WEIGHT
001 40 070	60	KG 0.360
001 40 075	80	KG 0.360
001 40 080	120	KG 0.360
001 40 085	220	KG 0.360
001 40 090	320	KG 0.360
001 40 095	400	KG 0.360
001 40 105	600	KG 0.360
001 40 110	800	KG 0.360
001 40 115	1500	KG 0.360
001 40 120	3000	KG 0.360
001 40 125	5000	KG 0.360
001 40 130	10000	KG 0.360



ADRIALUX 90 MM DIAMOND BLOCKS

"Adrialux" diamond blocks, 90 mm in size, for honing and pre-polishing granite.

Features:

These abrasives offer remarkable advantages in the processing of granite, namely: very high cutting efficiency, very long life, no ageing of the binder and very low weight, which means a drastic reduction in transport costs.

METAL BOND DIAMOND HONING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	UNIT WEIGHT
035 94 003	0	100 mm	KG 0.495
035 94 006	1	100 mm	KG 0.495
035 94 009	2	100 mm	KG 0.495
035 94 033	0	130 mm	KG 0.796
035 94 036	1	130 mm	KG 0.796
035 94 039	2	130 mm	KG 0.796



METAL BOND DIAMOND WHEELS FOR STRAIGHT EDGES

Metal bond snail lock diamond wheels, available in 100 mm and 130 mm diameter, for honing straight edges on granite.

METAL BOND DIAMOND HONING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	PCS PER CASE	UNIT WEIGHT
005 91 301	16	130 mm	24	KG 0.568
005 91 303	24	130 mm	24	KG 0.568
005 91 305	36	130 mm	24	KG 0.568
005 91 307	46	130 mm	24	KG 0.568
005 91 309	60	130 mm	24	KG 0.568
005 91 311	80	130 mm	24	KG 0.568
005 91 313	100	130 mm	24	KG 0.568
005 91 315	120	130 mm	24	KG 0.568
005 91 317	180	130 mm	24	KG 0.568
005 91 319	220	130 mm	24	KG 0.568
005 91 321	280	130 mm	24	KG 0.568
005 91 323	320	130 mm	24	KG 0.568
005 91 325	400	130 mm	24	KG 0.568
005 91 327	600	130 mm	24	KG 0.568
005 91 329	800	130 mm	24	KG 0.568
005 91 331	1000	130 mm	24	KG 0.568
005 91 333	1200	130 mm	24	KG 0.568
005 91 701	16	150 mm	16	KG 0.911
005 91 703	24	150 mm	16	KG 0.911
005 91 705	36	150 mm	16	KG 0.911
005 91 707	46	150 mm	16	KG 0.911
005 91 709	60	150 mm	16	KG 0.911
005 91 711	80	150 mm	16	KG 0.911
005 91 713	100	150 mm	16	KG 0.911
005 91 715	120	150 mm	16	KG 0.911
005 91 717	180	150 mm	16	KG 0.911
005 91 719	220	150 mm	16	KG 0.911
005 91 721	280	150 mm	16	KG 0.911
005 91 723	320	150 mm	16	KG 0.911
005 91 725	400	150 mm	16	KG 0.911
005 91 727	600	150 mm	16	KG 0.911
005 91 729	800	150 mm	16	KG 0.911
005 91 731	1000	150 mm	16	KG 0.911
005 91 733	1200	150 mm	16	KG 0.911



STAR-SHAPED MAGNESITE WHEELS FOR STRAIGHT EDGES

Star-shaped, snail lock magnesite wheels, available in 130 mm and 150 mm diameter, for honing and pre-polishing straight edges on granite.

Features:

Their peculiar shape provides excellent lubrication of the tool as well as excellent cutting properties. They can be used on edges of any thickness.

HONING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	PCS PER CASE	UNIT WEIGHT
005 91 401	16	130 mm	24	KG 0.701
005 91 403	24	130 mm	24	KG 0.701
005 91 405	36	130 mm	24	KG 0.701
005 91 407	46	130 mm	24	KG 0.701
005 91 409	60	130 mm	24	KG 0.701
005 91 411	80	130 mm	24	KG 0.701
005 91 413	100	130 mm	24	KG 0.701
005 91 415	120	130 mm	24	KG 0.701
005 91 417	180	130 mm	24	KG 0.701
005 91 419	220	130 mm	24	KG 0.701
005 91 421	280	130 mm	24	KG 0.701
005 91 423	320	130 mm	24	KG 0.701
005 91 425	400	130 mm	24	KG 0.701
005 91 427	600	130 mm	24	KG 0.701
005 91 429	800	130 mm	24	KG 0.701
005 91 431	1000	130 mm	24	KG 0.701
005 91 433	1200	130 mm	24	KG 0.701
005 91 801	16	150 mm	16	KG 0.888
005 91 803	24	150 mm	16	KG 0.888
005 91 805	36	150 mm	16	KG 0.888
005 91 807	46	150 mm	16	KG 0.888
005 91 809	60	150 mm	16	KG 0.888
005 91 811	80	150 mm	16	KG 0.888
005 91 813	100	150 mm	16	KG 0.888
005 91 815	120	150 mm	16	KG 0.888
005 91 817	180	150 mm	16	KG 0.888
005 91 819	220	150 mm	16	KG 0.888
005 91 821	280	150 mm	16	KG 0.888
005 91 823	320	150 mm	16	KG 0.888
005 91 825	400	150 mm	16	KG 0.888
005 91 827	600	150 mm	16	KG 0.888
005 91 829	800	150 mm	16	KG 0.888
005 91 831	1000	150 mm	16	KG 0.888
005 91 833	1200	150 mm	16	KG 0.888



3-SEGMENT MAGNESITE WHEELS FOR STRAIGHT EDGES

3-segment snail lock magnesite wheels, 130 mm or 150 mm in diameter, for honing and pre-polishing straight edges on granite.

Features:

This is by far the shape that results in the best lubrication and cutting performance. Due to the fact that the segments are small and far apart from each other, the abrasive undergoes a continuous “dressing” process, which allows achieving an excellent finish, even with high thicknesses. By contrast, this type of wheel is not recommended for small thicknesses (edges up to 2cm thick).

HONING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	PCS PER CASE	UNIT WEIGHT
005 91 101	16	130 mm	24	KG 0.569
005 91 103	24	130 mm	24	KG 0.569
005 91 105	36	130 mm	24	KG 0.569
005 91 107	46	130 mm	24	KG 0.569
005 91 109	60	130 mm	24	KG 0.569
005 91 111	80	130 mm	24	KG 0.569
005 91 113	100	130 mm	24	KG 0.569
005 91 115	120	130 mm	24	KG 0.569
005 91 117	180	130 mm	24	KG 0.569
005 91 119	220	130 mm	24	KG 0.569
005 91 121	280	130 mm	24	KG 0.569
005 91 123	320	130 mm	24	KG 0.569
005 91 125	400	130 mm	24	KG 0.569
005 91 127	600	130 mm	24	KG 0.569
005 91 129	800	130 mm	24	KG 0.569
005 91 131	1000	130 mm	24	KG 0.569
005 91 133	1200	130 mm	24	KG 0.569
005 91 601	16	150 mm	16	KG 0.966
005 91 603	24	150 mm	16	KG 0.966
005 91 605	36	150 mm	16	KG 0.966
005 91 607	46	150 mm	16	KG 0.966
005 91 609	60	150 mm	16	KG 0.966
005 91 611	80	150 mm	16	KG 0.966
005 91 613	100	150 mm	16	KG 0.966
005 91 615	120	150 mm	16	KG 0.966
005 91 617	180	150 mm	16	KG 0.966
005 91 619	220	150 mm	16	KG 0.966
005 91 621	280	150 mm	16	KG 0.966
005 91 623	320	150 mm	16	KG 0.966
005 91 625	400	150 mm	16	KG 0.966
005 91 627	600	150 mm	16	KG 0.966
005 91 629	800	150 mm	16	KG 0.966
005 91 631	1000	150 mm	16	KG 0.966
005 91 633	1200	150 mm	16	KG 0.966



MAGNESITE WHEELS FOR STRAIGHT EDGES

Magnesite snail lock wheels, available in 130 mm and 150 mm diameter, for honing and pre-polishing straight edges on granite. Inner hexagonal hole: 50 mm.

Features:

Up to grit 320, these wheels can also be used to hone natural and agglomerate marble, stone and onyx.

HONING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	PCS PER CASE	UNIT WEIGHT
005 92 001	16	130 mm	24	KG 0.569
005 92 003	24	130 mm	24	KG 0.569
005 92 005	36	130 mm	24	KG 0.569
005 92 007	46	130 mm	24	KG 0.569
005 92 009	60	130 mm	24	KG 0.569
005 92 011	80	130 mm	24	KG 0.569
005 92 013	100	130 mm	24	KG 0.569
005 92 015	120	130 mm	24	KG 0.569
005 92 017	180	130 mm	24	KG 0.569
005 92 019	220	130 mm	24	KG 0.569
005 92 021	280	130 mm	24	KG 0.569
005 92 023	320	130 mm	24	KG 0.569
005 92 025	400	130 mm	24	KG 0.569
005 92 027	600	130 mm	24	KG 0.569
005 92 029	800	130 mm	24	KG 0.569
005 92 031	1000	130 mm	24	KG 0.569
005 92 033	1200	130 mm	24	KG 0.569
005 92 401	16	150 mm	16	KG 0.966
005 92 403	24	150 mm	16	KG 0.966
005 92 405	36	150 mm	16	KG 0.966
005 92 407	46	150 mm	16	KG 0.966
005 92 409	60	150 mm	16	KG 0.966
005 92 411	80	150 mm	16	KG 0.966
005 92 413	100	150 mm	16	KG 0.966
005 92 415	120	150 mm	16	KG 0.966
005 92 417	180	150 mm	16	KG 0.966
005 92 419	220	150 mm	16	KG 0.966
005 92 421	280	150 mm	16	KG 0.966
005 92 423	320	150 mm	16	KG 0.966
005 92 425	400	150 mm	16	KG 0.966
005 92 427	600	150 mm	16	KG 0.966
005 92 429	800	150 mm	16	KG 0.966
005 92 431	1000	150 mm	16	KG 0.966
005 92 433	1200	150 mm	16	KG 0.966

**EXPRESS SYNTHETIC PHENOLIC BOND WHEELS FOR STRAIGHT EDGES**

“Express” synthetic snail lock wheels, available in 130 mm and 150 mm diameter, for honing and pre-polishing straight edges on granite. Inner hexagonal hole: 50 mm.

Features:

These abrasives combine excellent cutting properties with a controlled curing and stabilization process. They need to be stored in a non humid environment. Up to grit 320, these wheels can also be used to hone natural and agglomerate marble, stone and onyx.

HONING AND POLISHING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 45 001	40	100 mm	w/grooves	KG 0.354
001 45 005	60	100 mm	w/grooves	KG 0.354
001 45 010	80	100 mm	w/grooves	KG 0.354
001 45 015	120	100 mm	w/grooves	KG 0.354
001 45 020	150	100 mm	w/grooves	KG 0.354
001 45 025	200	100 mm	w/grooves	KG 0.354
001 45 030	300	100 mm	w/grooves	KG 0.354
001 45 035	400	100 mm	w/grooves	KG 0.354
001 45 045	600	100 mm	w/grooves	KG 0.354
001 45 050	800	100 mm	w/grooves	KG 0.354
001 45 060	1200	100 mm	w/grooves	KG 0.354
001 45 065	1500	100 mm	w/grooves	KG 0.354
001 45 075	3000	100 mm	w/grooves	KG 0.354
001 45 080	5000	100 mm	w/grooves	KG 0.354
001 45 085	6000	100 mm	w/grooves	KG 0.354
001 45 090	8000	100 mm	w/grooves	KG 0.354
001 45 365	40	100 mm	w/grooves & rubber	KG 1.174
001 45 370	60	100 mm	w/grooves & rubber	KG 1.174
001 45 375	80	100 mm	w/grooves & rubber	KG 1.174
001 45 380	120	100 mm	w/grooves & rubber	KG 1.174
001 45 385	150	100 mm	w/grooves & rubber	KG 1.174
001 45 390	200	100 mm	w/grooves & rubber	KG 1.174
001 45 395	300	100 mm	w/grooves & rubber	KG 1.174
001 45 400	400	100 mm	w/grooves & rubber	KG 1.174
001 45 405	600	100 mm	w/grooves & rubber	KG 1.174
001 45 410	800	100 mm	w/grooves & rubber	KG 1.174
001 45 415	1000	100 mm	w/grooves & rubber	KG 1.174
001 45 420	1200	100 mm	w/grooves & rubber	KG 1.174
001 45 425	1500	100 mm	w/grooves & rubber	KG 1.174
001 45 430	1800	100 mm	w/grooves & rubber	KG 1.174
001 45 435	3000	100 mm	w/grooves & rubber	KG 1.174
001 45 440	5000	100 mm	w/grooves & rubber	KG 1.174
001 45 445	6000	100 mm	w/grooves & rubber	KG 1.174
001 45 450	8000	100 mm	w/grooves & rubber	KG 1.174



ADRIALUX 100 MM DIAMOND WHEELS WITH GROOVES FOR STRAIGHT EDGES

“Adrialux” synthetic bond snail lock diamond wheels, 100 mm in diameter, for honing and pre-polishing straight edges on granite. These wheels are available with rigid or rubber backing to better conform to the shape of the work surface.

Features:

These products display excellent cutting properties and are very long lasting. The grooves in the abrasive allow water to pass through freely and this results in improved lubrication and enhanced abrasive capability, particularly on very hard materials. These wheels are also excellent for natural and agglomerate marble, stone and onyx.

HONING AND POLISHING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 45 095	40	100 mm	grooved 30°	KG 0.244
001 45 100	60	100 mm	grooved 30°	KG 0.244
001 45 105	80	100 mm	grooved 30°	KG 0.244
001 45 110	120	100 mm	grooved 30°	KG 0.244
001 45 115	150	100 mm	grooved 30°	KG 0.244
001 45 120	200	100 mm	grooved 30°	KG 0.244
001 45 125	300	100 mm	grooved 30°	KG 0.244
001 45 130	400	100 mm	grooved 30°	KG 0.244
001 45 135	600	100 mm	grooved 30°	KG 0.244
001 45 140	800	100 mm	grooved 30°	KG 0.244
001 45 145	1000	100 mm	grooved 30°	KG 0.244
001 45 150	1200	100 mm	grooved 30°	KG 0.244
001 45 155	1500	100 mm	grooved 30°	KG 0.244
001 45 160	1800	100 mm	grooved 30°	KG 0.244
001 45 165	3000	100 mm	grooved 30°	KG 0.244
001 45 170	5000	100 mm	grooved 30°	KG 0.244
001 45 175	6000	100 mm	grooved 30°	KG 0.244
001 45 180	8000	100 mm	grooved 30°	KG 0.244
001 45 460	40	100 mm	grooved 30° rubber	KG 1.064
001 45 465	60	100 mm	grooved 30° rubber	KG 1.064
001 45 470	80	100 mm	grooved 30° rubber	KG 1.064
001 45 475	120	100 mm	grooved 30° rubber	KG 1.064
001 45 480	150	100 mm	grooved 30° rubber	KG 1.064
001 45 485	200	100 mm	grooved 30° rubber	KG 1.064
001 45 490	300	100 mm	grooved 30° rubber	KG 1.064
001 45 495	400	100 mm	grooved 30° rubber	KG 1.064
001 45 500	600	100 mm	grooved 30° rubber	KG 1.064
001 45 505	800	100 mm	grooved 30° rubber	KG 1.064
001 45 510	1000	100 mm	grooved 30° rubber	KG 1.064
001 45 515	1200	100 mm	grooved 30° rubber	KG 1.064
001 45 520	1500	100 mm	grooved 30° rubber	KG 1.064
001 45 525	1800	100 mm	grooved 30° rubber	KG 1.064
001 45 530	3000	100 mm	grooved 30° rubber	KG 1.064
001 45 535	5000	100 mm	grooved 30° rubber	KG 1.064
001 45 540	6000	100 mm	grooved 30° rubber	KG 1.064
001 45 545	8000	100 mm	grooved 30° rubber	KG 1.064
001 45 185	40	100 mm	grooved 45°	KG 0.244
001 45 190	60	100 mm	grooved 45°	KG 0.244
001 45 195	80	100 mm	grooved 45°	KG 0.244
001 45 200	120	100 mm	grooved 45°	KG 0.244
001 45 205	150	100 mm	grooved 45°	KG 0.244
001 45 210	200	100 mm	grooved 45°	KG 0.244
001 45 215	300	100 mm	grooved 45°	KG 0.244
001 45 220	400	100 mm	grooved 45°	KG 0.244
001 45 225	600	100 mm	grooved 45°	KG 0.244
001 45 230	800	100 mm	grooved 45°	KG 0.244
001 45 235	1000	100 mm	grooved 45°	KG 0.244
001 45 240	1200	100 mm	grooved 45°	KG 0.244
001 45 245	1500	100 mm	grooved 45°	KG 0.244
001 45 250	1800	100 mm	grooved 45°	KG 0.244
001 45 255	3000	100 mm	grooved 45°	KG 0.244
001 45 260	5000	100 mm	grooved 45°	KG 0.244
001 45 265	6000	100 mm	grooved 45°	KG 0.244
001 45 270	8000	100 mm	grooved 45°	KG 0.244



ADRIALUX 100 MM INCLINED DIAMOND WHEELS WITH GROOVES FOR STRAIGHT EDGES

“Adrialux” synthetic snail lock diamond wheels, 100 mm in diameter, for honing and polishing inclined surfaces on granite. These wheels are available with rigid or rubber backing to better conform to the shape of the work surface.

Features:

They are ideal especially for kitchen sinks whose edges are set at a 30° or 45° angle

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 45 550	40	100 mm	grooved 45° rubber	KG 1.064
001 45 555	60	100 mm	grooved 45° rubber	KG 1.064
001 45 560	80	100 mm	grooved 45° rubber	KG 1.064
001 45 565	120	100 mm	grooved 45° rubber	KG 1.064
001 45 570	150	100 mm	grooved 45° rubber	KG 1.064
001 45 575	200	100 mm	grooved 45° rubber	KG 1.064
001 45 580	300	100 mm	grooved 45° rubber	KG 1.064
001 45 585	400	100 mm	grooved 45° rubber	KG 1.064
001 45 590	600	100 mm	grooved 45° rubber	KG 1.064
001 45 595	800	100 mm	grooved 45° rubber	KG 1.064
001 45 600	1000	100 mm	grooved 45° rubber	KG 1.064
001 45 605	1200	100 mm	grooved 45° rubber	KG 1.064
001 45 610	1500	100 mm	grooved 45° rubber	KG 1.064
001 45 615	1800	100 mm	grooved 45° rubber	KG 1.064
001 45 620	3000	100 mm	grooved 45° rubber	KG 1.064
001 45 625	5000	100 mm	grooved 45° rubber	KG 1.064
001 45 630	6000	100 mm	grooved 45° rubber	KG 1.064
001 45 635	8000	100 mm	grooved 45° rubber	KG 1.064

HONING AND POLISHING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 46 305	40	130 mm	w/grooves	KG 0.376
001 46 310	60	130 mm	w/grooves	KG 0.376
001 46 315	80	130 mm	w/grooves	KG 0.376
001 46 320	120	130 mm	w/grooves	KG 0.376
001 46 325	150	130 mm	w/grooves	KG 0.376
001 46 330	200	130 mm	w/grooves	KG 0.376
001 46 335	300	130 mm	w/grooves	KG 0.376
001 46 340	400	130 mm	w/grooves	KG 0.376
001 46 345	500	130 mm	w/grooves	KG 0.376
001 46 350	600	130 mm	w/grooves	KG 0.376
001 46 355	800	130 mm	w/grooves	KG 0.376
001 46 360	1000	130 mm	w/grooves	KG 0.376
001 46 365	1200	130 mm	w/grooves	KG 0.376
001 46 370	1500	130 mm	w/grooves	KG 0.376
001 46 375	1800	130 mm	w/grooves	KG 0.376
001 46 380	3000	130 mm	w/grooves	KG 0.376
001 46 385	3500	130 mm	w/grooves	KG 0.376
001 46 390	5000	130 mm	w/grooves	KG 0.376
001 46 395	6000	130 mm	w/grooves	KG 0.376
001 46 400	8000	130 mm	w/grooves	KG 0.376
001 46 405	10.000	130 mm	w/grooves	KG 0.376
001 46 410	40	130 mm	grooves & rubber	KG 0.540
001 46 415	60	130 mm	grooves & rubber	KG 0.540
001 46 420	80	130 mm	grooves & rubber	KG 0.540
001 46 425	120	130 mm	grooves & rubber	KG 0.540
001 46 430	150	130 mm	grooves & rubber	KG 0.540
001 46 435	200	130 mm	grooves & rubber	KG 0.540
001 46 440	300	130 mm	grooves & rubber	KG 0.540
001 46 445	400	130 mm	grooves & rubber	KG 0.540
001 46 450	500	130 mm	grooves & rubber	KG 0.540
001 46 455	600	130 mm	grooves & rubber	KG 0.540
001 46 460	800	130 mm	grooves & rubber	KG 0.540
001 46 465	1000	130 mm	grooves & rubber	KG 0.540
001 46 470	1200	130 mm	grooves & rubber	KG 0.540
001 46 475	1500	130 mm	grooves & rubber	KG 0.540
001 46 480	1800	130 mm	grooves & rubber	KG 0.540
001 46 485	3000	130 mm	grooves & rubber	KG 0.540
001 46 490	3500	130 mm	grooves & rubber	KG 0.540
001 46 495	5000	130 mm	grooves & rubber	KG 0.540
001 46 500	6000	130 mm	grooves & rubber	KG 0.540
001 46 505	8000	130 mm	grooves & rubber	KG 0.540
001 46 510	10.000	130 mm	grooves & rubber	KG 0.540



ADRIALUX 130 MM DIAMOND WHEELS WITH GROOVES FOR STRAIGHT EDGES

“Adrialux” synthetic bond snail lock diamond wheels, 130 mm in diameter, for honing and pre-polishing straight edges on granite. These wheels are available with rigid or rubber backing to better conform to the shape of the work surface.

Features:

These products display excellent cutting properties and are very long lasting. The grooves in the abrasive allow water to pass through freely and this results in improved lubrication and enhanced abrasive capability, particularly on very hard stone. These wheels are also excellent for natural and agglomerate marble, stone and onyx.

HONING AND POLISHING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 47 205	40	150 mm	w/grooves	KG 0.499
001 47 210	60	150 mm	w/grooves	KG 0.499
001 47 215	80	150 mm	w/grooves	KG 0.499
001 47 220	120	150 mm	w/grooves	KG 0.499
001 47 225	150	150 mm	w/grooves	KG 0.499
001 47 230	200	150 mm	w/grooves	KG 0.499
001 47 235	300	150 mm	w/grooves	KG 0.499
001 47 240	400	150 mm	w/grooves	KG 0.499
001 47 245	500	150 mm	w/grooves	KG 0.499
001 47 250	600	150 mm	w/grooves	KG 0.499
001 47 255	800	150 mm	w/grooves	KG 0.499
001 47 260	1000	150 mm	w/grooves	KG 0.499
001 47 265	1200	150 mm	w/grooves	KG 0.499
001 47 270	1500	150 mm	w/grooves	KG 0.499
001 47 275	1800	150 mm	w/grooves	KG 0.499
001 47 280	3000	150 mm	w/grooves	KG 0.499
001 47 285	3500	150 mm	w/grooves	KG 0.499
001 47 290	5000	150 mm	w/grooves	KG 0.499
001 47 295	6000	150 mm	w/grooves	KG 0.499
001 47 300	8000	150 mm	w/grooves	KG 0.499
001 47 305	10.000	150 mm	w/grooves	KG 0.499
001 47 730	40	150 mm	grooves & rubber	KG 0.757
001 47 735	60	150 mm	grooves & rubber	KG 0.757
001 47 740	80	150 mm	grooves & rubber	KG 0.757
001 47 745	120	150 mm	grooves & rubber	KG 0.757
001 47 750	150	150 mm	grooves & rubber	KG 0.757
001 47 755	200	150 mm	grooves & rubber	KG 0.757
001 47 760	300	150 mm	grooves & rubber	KG 0.757
001 47 765	400	150 mm	grooves & rubber	KG 0.757
001 47 770	500	150 mm	grooves & rubber	KG 0.757
001 47 775	600	150 mm	grooves & rubber	KG 0.757
001 47 780	800	150 mm	grooves & rubber	KG 0.757
001 47 785	1000	150 mm	grooves & rubber	KG 0.757
001 47 790	1200	150 mm	grooves & rubber	KG 0.757
001 47 795	1500	150 mm	grooves & rubber	KG 0.757
001 47 800	1800	150 mm	grooves & rubber	KG 0.757
001 47 805	3000	150 mm	grooves & rubber	KG 0.757
001 47 810	3500	150 mm	grooves & rubber	KG 0.757
001 47 815	4000	150 mm	grooves & rubber	KG 0.757
001 47 820	5000	150 mm	grooves & rubber	KG 0.757
001 47 825	6000	150 mm	grooves & rubber	KG 0.757
001 47 830	8000	150 mm	grooves & rubber	KG 0.757
001 47 835	10000	150 mm	grooves & rubber	KG 0.757



ADRIALUX 150 MM DIAMOND WHEELS WITH GROOVES FOR STRAIGHT EDGES

"Adrialux" synthetic bond snail lock diamond wheels, 150 mm in diameter, with 73 mm inner circular hole in the abrasive, for honing and pre-polishing straight edges on granite. These wheels are available with rigid or rubber backing to better conform to the shape of the work surface.

Features:

These products display excellent cutting properties and are very long lasting. The grooves in the abrasive allow water to pass through freely and this results in improved lubrication and enhanced abrasive capability, particularly on very hard materials. These wheels are also excellent for natural and agglomerate marble, stone and onyx.

HONING AND POLISHING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	FITTING	UNIT WEIGHT
001 46 001	40	130 mm	w/channels	snail lock	KG 0.269
001 46 005	60	130 mm	w/channels	snail lock	KG 0.269
001 46 010	80	130 mm	w/channels	snail lock	KG 0.269
001 46 015	120	130 mm	w/channels	snail lock	KG 0.269
001 46 020	150	130 mm	w/channels	snail lock	KG 0.269
001 46 025	200	130 mm	w/channels	snail lock	KG 0.269
001 46 030	300	130 mm	w/channels	snail lock	KG 0.269
001 46 035	400	130 mm	w/channels	snail lock	KG 0.269
001 46 040	500	130 mm	w/channels	snail lock	KG 0.269
001 46 045	600	130 mm	w/channels	snail lock	KG 0.269
001 46 050	800	130 mm	w/channels	snail lock	KG 0.269
001 46 055	1000	130 mm	w/channels	snail lock	KG 0.269
001 46 060	1200	130 mm	w/channels	snail lock	KG 0.269
001 46 065	1500	130 mm	w/channels	snail lock	KG 0.269
001 46 070	1800	130 mm	w/channels	snail lock	KG 0.269
001 46 075	3000	130 mm	w/channels	snail lock	KG 0.269
001 46 080	3500	130 mm	w/channels	snail lock	KG 0.269
001 46 085	5000	130 mm	w/channels	snail lock	KG 0.269
001 46 090	6000	130 mm	w/channels	snail lock	KG 0.269
001 46 095	8000	130 mm	w/channels	snail lock	KG 0.269
001 46 100	10.000	130 mm	w/channels	snail lock	KG 0.269
001 46 410	40	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 415	60	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 420	80	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 425	120	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 430	150	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 435	200	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 440	300	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 445	400	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 450	500	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 455	600	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 460	800	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 465	1000	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 470	1200	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 475	1500	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 480	1800	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 485	3000	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 490	3500	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 495	5000	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 500	6000	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 505	8000	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 510	10.000	130 mm	w/channels & rubber	snail lock	KG 0.384
001 46 105	40	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 110	60	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 115	80	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 120	120	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 125	150	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 130	200	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 135	300	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 140	400	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 145	500	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 150	600	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 155	800	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 160	1000	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 165	1200	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 170	1500	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 175	1800	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 177	3000	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 178	3500	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 180	5000	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 185	6000	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 190	8000	130 mm	w/channels	Velcro QRS	KG 0.254
001 46 195	10.000	130 mm	w/channels	Velcro	KG 0.254



ADRIALUX 130 MM DIAMOND WHEELS WITH WATER CHANNELS FOR STRAIGHT EDGES

"Adrialux" synthetic bond diamond wheels with water channels, 130 mm in diameter, with snail lock or QRS Velcro backing, for honing and polishing straight edges on granite. These wheels are available with rigid or rubber backing to better conform to the shape of the work surface. Inner circular hole: 50 mm.

Features:

The numerous water channels in the surface of the tool allow continuous dressing of the diamond grit dispersed in the binder, while keeping the tool cool. These wheels are also excellent for natural and agglomerate marble, stone and onyx.

HONING AND POLISHING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	FITTING	UNIT WEIGHT
001 47 001	40	150 mm	w/channels	snail lock	KG 0.364
001 47 005	60	150 mm	w/channels	snail lock	KG 0.364
001 47 010	80	150 mm	w/channels	snail lock	KG 0.364
001 47 015	120	150 mm	w/channels	snail lock	KG 0.364
001 47 020	150	150 mm	w/channels	snail lock	KG 0.364
001 47 025	200	150 mm	w/channels	snail lock	KG 0.364
001 47 030	300	150 mm	w/channels	snail lock	KG 0.364
001 47 035	400	150 mm	w/channels	snail lock	KG 0.364
001 47 040	500	150 mm	w/channels	snail lock	KG 0.364
001 47 045	600	150 mm	w/channels	snail lock	KG 0.364
001 47 050	800	150 mm	w/channels	snail lock	KG 0.364
001 47 055	1000	150 mm	w/channels	snail lock	KG 0.364
001 47 060	1200	150 mm	w/channels	snail lock	KG 0.364
001 47 065	1500	150 mm	w/channels	snail lock	KG 0.364
001 47 070	1800	150 mm	w/channels	snail lock	KG 0.364
001 47 075	3000	150 mm	w/channels	snail lock	KG 0.364
001 47 080	3500	150 mm	w/channels	snail lock	KG 0.364
001 47 085	5000	150 mm	w/channels	snail lock	KG 0.364
001 47 090	6000	150 mm	w/channels	snail lock	KG 0.364
001 47 095	8000	150 mm	w/channels	snail lock	KG 0.364
001 47 100	10.000	150 mm	w/channels	snail lock	KG 0.364
001 47 625	40	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 630	60	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 635	80	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 640	120	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 645	150	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 650	200	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 655	300	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 660	400	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 665	500	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 670	600	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 675	800	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 680	1000	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 685	1200	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 690	1500	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 695	1800	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 700	3000	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 705	3500	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 710	5000	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 715	6000	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 720	8000	150 mm	w/channels & rubber	snail lock	KG 0.541
001 46 725	10.000	150 mm	w/channels & rubber	snail lock	KG 0.541
001 47 105	40	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 110	60	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 115	80	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 120	120	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 125	200	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 130	300	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 135	400	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 140	500	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 145	600	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 150	800	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 155	1000	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 160	1200	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 165	1500	150 mm	w/channels	Velcro QRS	KG 0.350
001 47 170	1800	150 mm	w/channels	Velcro QRS	KG 0.350



ADRIALUX 150 MM DIAMOND WHEELS WITH CHANNELS FOR STRAIGHT EDGES

"Adrialux" synthetic bond diamond wheels with water channels, 150 mm in diameter, with snail lock or QRS Velcro backing, for honing and polishing straight edges on granite. These wheels are available with rigid or rubber backing to better conform to the shape of the work surface. Inner hexagonal hole: 50 mm.

Features:

The numerous water channels in the surface of the tool allow continuous dressing of the diamond grit dispersed in the binder, while keeping the tool cool. These wheels are also excellent for natural and agglomerate marble, stone and onyx

HONING AND POLISHING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER	TYPE	UNIT WEIGHT
001 46 200	40	130 mm	-	KG 0.045
001 46 205	60	130 mm	-	KG 0.045
001 46 210	80	130 mm	-	KG 0.045
001 46 215	120	130 mm	-	KG 0.045
001 46 220	150	130 mm	-	KG 0.045
001 46 225	200	130 mm	-	KG 0.045
001 46 230	300	130 mm	-	KG 0.045
001 46 235	400	130 mm	-	KG 0.045
001 46 240	500	130 mm	-	KG 0.045
001 46 245	600	130 mm	-	KG 0.045
001 46 250	800	130 mm	-	KG 0.045
001 46 255	1000	130 mm	-	KG 0.045
001 46 260	1200	130 mm	-	KG 0.045
001 46 265	1500	130 mm	-	KG 0.045
001 46 270	1800	130 mm	-	KG 0.045
001 46 275	3000	130 mm	-	KG 0.045
001 46 280	3500	130 mm	-	KG 0.045
001 46 285	5000	130 mm	-	KG 0.045
001 46 290	6000	130 mm	-	KG 0.045
001 46 295	8000	130 mm	-	KG 0.045
001 46 300	10.000	130 mm	-	KG 0.045
001 46 515	40	130 mm	rubber	KG 0.565
001 46 520	60	130 mm	rubber	KG 0.565
001 46 525	80	130 mm	rubber	KG 0.565
001 46 530	120	130 mm	rubber	KG 0.565
001 46 535	150	130 mm	rubber	KG 0.565
001 46 540	200	130 mm	rubber	KG 0.565
001 46 545	300	130 mm	rubber	KG 0.565
001 46 550	400	130 mm	rubber	KG 0.565
001 46 555	500	130 mm	rubber	KG 0.565
001 46 560	600	130 mm	rubber	KG 0.565
001 46 565	800	130 mm	rubber	KG 0.565
001 46 570	1000	130 mm	rubber	KG 0.565
001 46 575	1200	130 mm	rubber	KG 0.565
001 46 580	1500	130 mm	rubber	KG 0.565
001 46 585	1800	130 mm	rubber	KG 0.565
001 46 590	3000	130 mm	rubber	KG 0.565
001 46 595	3500	130 mm	rubber	KG 0.565
001 46 600	5000	130 mm	rubber	KG 0.565
001 46 605	6000	130 mm	rubber	KG 0.565
001 46 610	8000	130 mm	rubber	KG 0.565
001 46 515	10.000	130 mm	rubber	KG 0.565
001 47 415	40	150 mm	-	KG 0.602
001 47 420	60	150 mm	-	KG 0.602
001 47 425	80	150 mm	-	KG 0.602
001 47 430	120	150 mm	-	KG 0.602
001 47 435	150	150 mm	-	KG 0.602
001 47 440	200	150 mm	-	KG 0.602
001 47 445	300	150 mm	-	KG 0.602
001 47 450	400	150 mm	-	KG 0.602
001 47 455	500	150 mm	-	KG 0.602
001 47 460	600	150 mm	-	KG 0.602
001 47 465	800	150 mm	-	KG 0.602
001 47 470	1000	150 mm	-	KG 0.602
001 47 475	1200	150 mm	-	KG 0.602
001 47 480	1500	150 mm	-	KG 0.602
001 47 485	1800	150 mm	-	KG 0.602
001 47 490	3000	150 mm	-	KG 0.602
001 47 495	3500	150 mm	-	KG 0.602



ADRIALUX DIAMOND WHEELS FOR STRAIGHT EDGES

“Adrialux” synthetic bond diamond wheels, available in 130 mm and 150 mm diameter, with snail lock design, for honing and polishing straight edges on granite. These wheels are available with rigid or rubber backing to better conform to the shape of the work surface. Inner hexagonal hole: 50 mm.

Features:

These products display excellent cutting properties and are very long lasting. Their continuous shape delivers a uniform finish without leaving end scratches on the surface. They can also be used to hone and pre-polish natural and agglomerate marble, stone and onyx.

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 47 500	5000	150 mm		KG 0.602
001 47 505	6000	150 mm		KG 0.602
001 47 510	8000	150 mm		KG 0.602
001 47 515	10000	150 mm		KG 0.602
001 47 900	40	150 mm		KG 0.602
001 47 902	60	150 mm	rubber	KG 0.779
001 47 904	80	150 mm	rubber	KG 0.779
001 47 906	120	150 mm	rubber	KG 0.779
001 47 908	150	150 mm	rubber	KG 0.779
001 47 910	200	150 mm	rubber	KG 0.779
001 47 912	300	150 mm	rubber	KG 0.779
001 47 914	400	150 mm	rubber	KG 0.779
001 47 916	500	150 mm	rubber	KG 0.779
001 47 918	600	150 mm	rubber	KG 0.779
001 47 920	800	150 mm	rubber	KG 0.779
001 47 922	1000	150 mm	rubber	KG 0.779
001 47 924	1200	150 mm	rubber	KG 0.779
001 47 926	1500	150 mm	rubber	KG 0.779
001 47 928	1800	150 mm	rubber	KG 0.779
001 47 930	3000	150 mm	rubber	KG 0.779
001 47 932	3500	150 mm	rubber	KG 0.779
001 47 934	5000	150 mm	rubber	KG 0.779
001 47 936	6000	150 mm	rubber	KG 0.779
001 47 938	8000	150 mm	rubber	KG 0.779
001 47 940	10000	150 mm	rubber	KG 0.779

POLISHING WHEELS FOR STRAIGHT EDGES

CODE	OUTER DIAMETER	UNIT WEIGHT
005 97 051	130 mm	KG 0.555
005 97 251	150 mm	KG 1.004



STAR-SHAPED POLISHING WHEELS FOR STRAIGHT EDGES

Star-shaped, snail lock polishing wheels, available in 130 mm and 150 mm diameter, designed to achieve a perfect polish on granite.

CODE	OUTER DIAMETER	UNIT WEIGHT
005 97 400	130 mm	KG 0.656
005 97 401	150 mm	KG 1.057



3-SEGMENT POLISHING WHEELS FOR STRAIGHT EDGES

3-segment wheels designed to achieve a perfect polish on granite.

POLISHING WHEELS FOR STRAIGHT EDGES

CODE	OUTER DIAMETER	UNIT WEIGHT
005 97 001	130 mm	KG 0.667
005 97 201	150 mm	KG 1.111



POLISHING WHEELS FOR STRAIGHT EDGES

Snail lock polishing wheels, available in 130 mm and 150 mm diameter, with 50 mm inner hexagonal hole, designed to achieve a perfect polish on granite.

HONING WHEELS FOR STRAIGHT EDGES

CODE	GRITS	OUTER DIAMETER	UNIT WEIGHT
001 53 215	120	130 mm	KG 0.310
001 53 225	220	130 mm	KG 0.310
001 53 230	320	130 mm	KG 0.310
001 53 235	400	130 mm	KG 0.310
001 53 245	600	130 mm	KG 0.310
001 53 430	120	150 mm	KG 0.380
001 53 440	220	150 mm	KG 0.380
001 53 445	320	150 mm	KG 0.380
001 53 450	400	150 mm	KG 0.380
001 53 460	600	150 mm	KG 0.380



ADRIALAP DIAMOND WHEELS FOR HONING STRAIGHT EDGES

"Adrialap" snail lock honing wheels, available in 130 mm and 150 mm diameter, designed to provide a uniform honed finish, without scratch marks, on granite. Inner hexagonal hole: 50 mm.

Features:

Besides delivering a more uniform finish, these wheels will enhance the colour of the stone. They can also be used on natural and agglomerate marble, stone and onyx.

HONING WHEELS FOR BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	PCS PER CASE	UNIT WEIGHT
005 94 001	36	100 mm	25 mm hole	44	KG 0.429
005 94 003	46	100 mm	25 mm hole	44	KG 0.429
005 94 005	60	100 mm	25 mm hole	44	KG 0.429
005 94 007	80	100 mm	25 mm hole	44	KG 0.429
005 94 009	120	100 mm	25 mm hole	44	KG 0.429
005 94 013	220	100 mm	25 mm hole	44	KG 0.429
005 94 017	320	100 mm	25 mm hole	44	KG 0.429
005 94 019	400	100 mm	25 mm hole	44	KG 0.429
005 94 021	600	100 mm	25 mm hole	44	KG 0.429
005 94 023	800	100 mm	25 mm hole	44	KG 0.429
005 94 025	1000	100 mm	25 mm hole	44	KG 0.429
005 94 027	1200	100 mm	25 mm hole	44	KG 0.429
005 94 301	36	130 mm	25 mm hole	24	KG 0.744
005 94 303	46	130 mm	25 mm hole	24	KG 0.744
005 94 305	60	130 mm	25 mm hole	24	KG 0.744
005 94 307	80	130 mm	25 mm hole	24	KG 0.744
005 94 309	120	130 mm	25 mm hole	24	KG 0.744
005 94 313	220	130 mm	25 mm hole	24	KG 0.744
005 94 317	320	130 mm	25 mm hole	24	KG 0.744
005 94 319	400	130 mm	25 mm hole	24	KG 0.744
005 94 321	600	130 mm	25 mm hole	24	KG 0.744
005 94 323	800	130 mm	25 mm hole	24	KG 0.744
005 94 325	1000	130 mm	25 mm hole	24	KG 0.744
005 94 327	1200	130 mm	25 mm hole	24	KG 0.744
005 94 601	36	150 mm	25 mm hole	16	KG 1.208
005 94 603	46	150 mm	25 mm hole	16	KG 1.208
005 94 605	60	150 mm	25 mm hole	16	KG 1.208
005 94 607	80	150 mm	25 mm hole	16	KG 1.208
005 94 609	120	150 mm	25 mm hole	16	KG 1.208
005 94 613	220	150 mm	25 mm hole	16	KG 1.208
005 94 617	320	150 mm	25 mm hole	16	KG 1.208
005 94 619	400	150 mm	25 mm hole	16	KG 1.208
005 94 621	600	150 mm	25 mm hole	16	KG 1.208
005 94 623	800	150 mm	25 mm hole	16	KG 1.208
005 94 625	1000	150 mm	25 mm hole	16	KG 1.208
005 94 627	1200	150 mm	25 mm hole	16	KG 1.208

**MAGNESITE HONING WHEELS w/ SMALL HOLE, FOR BULLNOSE EDGES**

Magnesite snail lock wheels, available in 100 mm, 130 mm and 150 mm diameter, with 25 mm small inner circular hole, ideal for honing and pre-polishing full bullnose profiles on granite. Also suitable for half bullnose shapes.

HONING WHEELS FOR BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	PCS PER CASE	UNIT WEIGHT
005 95 001	36	100 mm	25 mm hole	44	KG 0.402
005 95 003	46	100 mm	25 mm hole	44	KG 0.402
005 95 005	60	100 mm	25 mm hole	44	KG 0.402
005 95 007	80	100 mm	25 mm hole	44	KG 0.402
005 95 009	100	100 mm	25 mm hole	44	KG 0.402
005 95 011	120	100 mm	25 mm hole	44	KG 0.402
005 95 013	220	100 mm	25 mm hole	44	KG 0.402
005 95 015	320	100 mm	25 mm hole	44	KG 0.402
005 95 017	400	100 mm	25 mm hole	44	KG 0.402
005 95 019	600	100 mm	25 mm hole	44	KG 0.402
005 95 021	800	100 mm	25 mm hole	44	KG 0.402
005 95 023	1000	100 mm	25 mm hole	44	KG 0.402
005 95 025	1200	100 mm	25 mm hole	44	KG 0.402
005 95 027	1500	100 mm	25 mm hole	44	KG 0.402
005 95 301	36	130 mm	25 mm hole	24	KG 0.717
005 95 303	46	130 mm	25 mm hole	24	KG 0.717
005 95 305	60	130 mm	25 mm hole	24	KG 0.717
005 95 307	80	130 mm	25 mm hole	24	KG 0.717
005 95309	100	130 mm	25 mm hole	24	KG 0.717
005 95 311	120	130 mm	25 mm hole	24	KG 0.717
005 95 315	220	130 mm	25 mm hole	24	KG 0.717
005 95 317	320	130 mm	25 mm hole	24	KG 0.717
005 95 319	400	130 mm	25 mm hole	24	KG 0.717
005 95 321	600	130 mm	25 mm hole	24	KG 0.717
005 95 323	800	130 mm	25 mm hole	24	KG 0.717
005 95 325	1000	130 mm	25 mm hole	24	KG 0.717
005 95 327	1200	130 mm	25 mm hole	24	KG 0.717
005 95 329	1500	130 mm	25 mm hole	24	KG 0.717
005 95 601	36	150 mm	25 mm hole	16	KG 1.181
005 95 603	46	150 mm	25 mm hole	16	KG 1.181
005 95 605	60	150 mm	25 mm hole	16	KG 1.181
005 95 607	80	150 mm	25 mm hole	16	KG 1.181
005 95 611	120	150 mm	25 mm hole	16	KG 1.181
005 95 613	220	150 mm	25 mm hole	16	KG 1.181
005 95 615	320	150 mm	25 mm hole	16	KG 1.181
005 95 617	400	150 mm	25 mm hole	16	KG 1.181
005 95 619	600	150 mm	25 mm hole	16	KG 1.181
005 95 621	800	150 mm	25 mm hole	16	KG 1.181
005 95 623	1000	150 mm	25 mm hole	16	KG 1.181
005 95 625	1200	150 mm	25 mm hole	16	KG 1.181
005 95 627	1500	150 mm	25 mm hole	16	KG 1.181



SYNTHETIC POLYESTER WHEELS FOR BULLNOSE EDGES, w/ SMALL HOLE

Synthetic snail lock wheels available in 100 mm and 150 mm diameter, with 25 mm small circular hole, ideal for honing and pre-polishing half and full bullnose profiles on granite.

Features:

Being synthetic, these wheels do not undergo quality changes over time (such as hardening of the binder or diminished cutting performance of the abrasive). They create perfect pre-polished finishes also on natural and agglomerate marble, stone and onyx.

HONING WHEELS FOR BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	PCS PER CASE	UNIT WEIGHT
005 95 701	36	150 mm	75 mm hole	16	KG 0.998
005 95 703	46	150 mm	75 mm hole	16	KG 0.998
005 95 705	60	150 mm	75 mm hole	16	KG 0.998
005 95 707	80	150 mm	75 mm hole	16	KG 0.998
005 95 711	120	150 mm	75 mm hole	16	KG 0.998
005 95 713	220	150 mm	75 mm hole	16	KG 0.998
005 95 715	320	150 mm	75 mm hole	16	KG 0.998
005 95 717	400	150 mm	75 mm hole	16	KG 0.998
005 95 721	600	150 mm	75 mm hole	16	KG 0.998
005 95 723	800	150 mm	75 mm hole	16	KG 0.998
005 95 725	1000	150 mm	75 mm hole	16	KG 0.998
005 95 727	1200	150 mm	75 mm hole	16	KG 0.998
005 95 729	1500	150 mm	75 mm hole	16	KG 0.998



SYNTHETIC POLYESTER WHEELS FOR BULLNOSE EDGES, w/ LARGE HOLE

Synthetic snail lock honing wheels, 150 mm in diameter, with 75 mm inner circular hole, for honing and pre-polishing bullnose profiles on granite.

Features:

Being synthetic, these wheels do not undergo quality changes over time (such as hardening of the binder or diminished cutting performance of the abrasive). They create perfect pre-polished finishes also on natural and agglomerate marble, stone and onyx.

HONING WHEELS FOR BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 55 001	40	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 005	60	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 010	80	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 015	120	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 020	150	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 025	200	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 030	300	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 035	400	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 045	600	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 050	800	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 055	1000	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 060	1200	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 065	1500	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 075	3000	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 085	5000	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 090	6000	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 795	8000	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 100	10000	100 mm	25 mm hole low profile 10 mm	KG 0.275
001 55 305	40	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 310	60	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 315	80	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 320	120	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 325	150	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 330	200	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 335	300	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 340	400	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 350	600	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 355	800	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 360	1000	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 365	1200	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 370	1500	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 380	3000	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 390	5000	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 395	6000	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 400	8000	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 405	10000	130 mm	25 mm hole low profile 10 mm	KG 0.432
001 55 610	40	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 615	60	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 620	80	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 625	120	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 630	150	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 635	200	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 640	300	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 645	400	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 650	500	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 655	600	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 660	800	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 665	1000	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 670	1200	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 675	1500	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 680	1800	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 685	3000	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 690	4000	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 693	5000	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 695	6000	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 697	8000	150 mm	25 mm hole low profile 10 mm	KG 1.009
001 55 700	10.000	150 mm	25 mm hole low profile 10 mm	KG 1.009



ADRIALUX LOW-PROFILE DIAMOND WHEELS FOR BULLNOSE EDGES, w/ SMALL HOLE


“Adrialux” synthetic bond snail lock diamond wheels, available in 100 mm, 130 mm and 150 mm diameter, with 25mm inner circular hole, for honing and polishing half and full bullnose profiles on granite.

Features:

These abrasives offer remarkable advantages in the processing of the above materials, namely: very high cutting efficiency, very long life resulting in reduced downtime for abrasive change, no problems due to ageing of the binder and extremely low weight, which means a drastic cut in transport costs. These wheels create perfect honed and polished finishes also on natural and agglomerate marble, stone and onyx.

HONING AND POLISHING WHEELS FOR BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 55 105	40	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 110	60	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 115	80	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 120	120	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 125	150	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 130	200	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 135	300	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 140	400	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 150	600	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 155	800	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 160	1000	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 165	1200	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 170	1500	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 180	3000	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 190	5000	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 195	6000	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 200	8000	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 205	10000	100 mm	25 mm hole - 30 mm high	KG 0.385
001 55 415	40	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 420	60	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 425	80	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 430	120	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 435	150	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 440	200	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 445	300	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 445	400	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 455	600	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 460	800	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 465	1000	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 470	1200	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 475	1500	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 485	3000	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 493	5000	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 495	6000	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 497	8000	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 500	10.000	130 mm	25 mm hole - 30 mm high	KG 0.846
001 55 500	40	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 505	60	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 510	80	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 515	120	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 520	150	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 525	200	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 530	300	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 535	400	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 540	500	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 545	600	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 550	800	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 555	1000	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 560	1200	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 570	1500	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 575	1800	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 580	3000	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 585	4000	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 590	5000	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 595	6000	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 600	8000	150 mm	25 mm hole - 30 mm high	KG 0.621
001 55 605	10.000	150 mm	25 mm hole - 30 mm high	KG 0.621

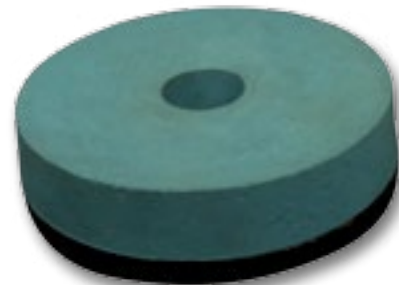

ADRIALUX HIGH-PROFILE DIAMOND WHEELS FOR BULLNOSE EDGES, w/ SMALL HOLE

"Adrialux" synthetic bond snail lock diamond wheels, available in 100 mm, 130 mm and 150 mm diameter, with 25mm inner circular hole, for honing and polishing half and full bullnose profiles on granite.

Features:

These wheels offer the same advantages as the low-profile model, plus a remarkably longer life thanks to the greater height of the abrasive. They can also be used on the first heads in the processing of straight edges, in order to "gauge" the thickness. These wheels create perfect honed and polished finishes also on natural and agglomerate marble, stone and onyx.

HONING AND POLISHING WHEELS FOR BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 55 703	40	150 mm	75 mm hole	KG 0.579
001 55 705	60	150 mm	75 mm hole	KG 0.579
001 55 710	80	150 mm	75 mm hole	KG 0.579
001 55 715	120	150 mm	75 mm hole	KG 0.579
001 55 720	150	150 mm	75 mm hole	KG 0.579
001 55 725	200	150 mm	75 mm hole	KG 0.579
001 55 730	300	150 mm	75 mm hole	KG 0.579
001 55 735	400	150 mm	75 mm hole	KG 0.579
001 55 745	600	150 mm	75 mm hole	KG 0.579
001 55 750	800	150 mm	75 mm hole	KG 0.579
001 55 755	1000	150 mm	75 mm hole	KG 0.579
001 55 760	1200	150 mm	75 mm hole	KG 0.579
001 55 765	1500	150 mm	75 mm hole	KG 0.579
001 55 775	3000	150 mm	75 mm hole	KG 0.579
001 55 785	5000	150 mm	75 mm hole	KG 0.579
001 55 790	6000	150 mm	75 mm hole	KG 0.579
001 55 795	8000	150 mm	75 mm hole	KG 0.579
001 55 800	10000	150 mm	75 mm hole	KG 0.579



ADRIALUX DIAMOND WHEELS FOR BULLNOSE EDGES, w/ LARGE HOLE

"Adrialux" synthetic bond snail lock diamond wheels, available in 150 mm diameter, for honing and polishing half and full bullnose profiles on granite.

Features:

These wheels create perfect honed and polished finishes also on natural and agglomerate marble, stone and onyx.

POLISHING WHEELS FOR BULLNOSE EDGES

CODE	OUTER DIAMETER	TYPE	PCS PER CASE	UNIT WEIGHT
005 97 501	100 mm	25 mm hole	44	KG 0.436
005 97 551	130 mm	25 mm hole	24	KG 0.796
005 97 651	150 mm	25 mm hole	16	KG 1.276



POLISHING WHEELS FOR BULLNOSE EDGES, w/ SMALL HOLE

Snail lock polishing wheels, available in 100 mm, 130 mm and 150 mm diameter, for polishing half and full bullnose profiles on granite.

Features:

These wheels create perfect honed and polished finishes also on natural and agglomerate marble, stone and onyx.

POLISHING WHEELS FOR BULLNOSE EDGES

CODE	OUTER DIAMETER	TYPE	PCS PER CASE	UNIT WEIGHT
005 97 701	mm.150	75 mm hole	16	KG 1.084



POLISHING WHEELS FOR BULLNOSE EDGES, w/ LARGE HOLE

Snail lock polishing wheels, 150 mm in diameter, for polishing half and full bullnose profiles on granite.

HONING WHEELS FOR BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	UNIT WEIGHT
001 63 320	120	130 mm	KG 0.290
001 63 330	120	130 mm	KG 0.290
001 63 335	320	130 mm	KG 0.290
001 63 340	400	130 mm	KG 0.290
001 63 350	600	130 mm	KG 0.290



ADRIALAP DIAMOND WHEELS FOR BULLNOSE EDGES

"Adrialap" snail lock honing wheels, 130 mm in diameter, designed to provide a consistent, uniform honed finish on granite, leaving no scratch marks. Inner circular hole: 25 mm.

Features:

Besides delivering a more uniform finish, these wheels enhance the colour of the stone.

HONING AND POLISHING WHEELS FOR STRAIGHT AND BULLNOSE EDGES

CODE	GRITS	OUTER DIAMETER	TYPE	PCS PER CASE	UNIT WEIGHT
005 98 103	24	150 mm	w/grooves	24	KG 1.24
005 98 106	36	150 mm	w/grooves	24	KG 1.24
005 98 109	60	150 mm	w/grooves	24	KG 1.24
005 98 112	120	150 mm	w/grooves	24	KG 1.24
005 98 115	220	150 mm	w/grooves	24	KG 1.24
005 98 118	280	150 mm	w/grooves	24	KG 1.24
005 98 121	320	150 mm	w/grooves	24	KG 1.24
005 98 124	400	150 mm	w/grooves	24	KG 1.24
005 98 127	600	150 mm	w/grooves	24	KG 1.24
005 98 130	800	150 mm	w/grooves	24	KG 1.24
005 98 133	1000	150 mm	w/grooves	24	KG 1.24
005 98 139	polishing	150 mm	w/grooves	24	KG 1.24



GENERAL PURPOSE MAGNESITE WHEELS FOR STRAIGHT AND BULLNOSE EDGES

Magnesite snail lock wheels, 150 mm in diameter; this general purpose model is suited for honing and polishing straight edges as well as half and full bullnose profiles on granite. Inner circular hole: 25 mm.

Features:

The grooves in the abrasive allow water to pass through freely, improving the lubrication of the abrasive and enhancing the cutting performance of the tool. These wheels are also suitable for bullnose profiles on engineered quartz surfaces.

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 46 725	40	130 mm	w/grooves & rubber	KG 0.340
001 46 730	60	130 mm	w/grooves & rubber	KG 0.340
001 46 735	80	130 mm	w/grooves & rubber	KG 0.340
001 46 740	120	130 mm	w/grooves & rubber	KG 0.340
001 46 745	150	130 mm	w/grooves & rubber	KG 0.340
001 46 750	200	130 mm	w/grooves & rubber	KG 0.340
001 46 755	300	130 mm	w/grooves & rubber	KG 0.340
001 46 760	400	130 mm	w/grooves & rubber	KG 0.340
001 46 765	500	130 mm	w/grooves & rubber	KG 0.340
001 46 770	600	130 mm	w/grooves & rubber	KG 0.340
001 46 775	800	130 mm	w/grooves & rubber	KG 0.340
001 46 780	1000	130 mm	w/grooves & rubber	KG 0.340
001 46 785	1200	130 mm	w/grooves & rubber	KG 0.340
001 46 790	1500	130 mm	w/grooves & rubber	KG 0.340
001 46 795	1800	130 mm	w/grooves & rubber	KG 0.340
001 46 800	2000	130 mm	w/grooves & rubber	KG 0.340
001 46 805	3000	130 mm	w/grooves & rubber	KG 0.340
001 46 810	4000	130 mm	w/grooves & rubber	KG 0.340
001 46 815	5000	130 mm	w/grooves & rubber	KG 0.340
001 46 820	6000	130 mm	w/grooves & rubber	KG 0.340
001 46 825	8000	130 mm	w/grooves & rubber	KG 0.340
001 46 830	10000	130 mm	w/grooves & rubber	KG 0.340



ADRIALUX GENERAL PURPOSE LOW-PROFILE DIAMOND WHEELS WITH GROOVES, FOR STRAIGHT AND BULLNOSE EDGES

"Adrialux" all-purpose diamond wheels with grooves for honing and polishing straight edges as well as half and full bullnose profiles on granite. Inner circular hole: 20 mm.

Features:

These general-purpose wheels can also be used on straight edges and half and full bullnose profiles on natural marble, stone and onyx, as well as engineered marble and quartz surfaces.

CHAMFERING WHEELS (BEVELS)

CODE	GRITS	OUTER DIAMETER	TYPE	PCS PER CASE	UNIT WEIGHT
005 90 001	60	100 mm	25 mm hole	44	KG 0.352
005 90 003	80	100 mm	25 mm hole	44	KG 0.352
005 90 005	120	100 mm	25 mm hole	44	KG 0.352
005 90 007	220	100 mm	25 mm hole	44	KG 0.352
005 90 009	280	100 mm	25 mm hole	44	KG 0.352
005 90 011	320	100 mm	25 mm hole	44	KG 0.352
005 90 013	400	100 mm	25 mm hole	44	KG 0.352
005 90 015	600	100 mm	25 mm hole	44	KG 0.352
005 90 017	800	100 mm	25 mm hole	44	KG 0.352
005 90 019	1000	100 mm	25 mm hole	44	KG 0.352
005 90 101	60	130 mm	25 mm hole	24	KG 0.680
005 90 103	80	130 mm	25 mm hole	24	KG 0.680
005 90 105	120	130 mm	25 mm hole	24	KG 0.680
005 90 107	220	130 mm	25 mm hole	24	KG 0.680
005 90 109	280	130 mm	25 mm hole	24	KG 0.680
005 90 111	320	130 mm	25 mm hole	24	KG 0.680
005 90 113	400	130 mm	25 mm hole	24	KG 0.680
005 90 115	600	130 mm	25 mm hole	24	KG 0.680
005 90 117	800	130 mm	25 mm hole	24	KG 0.680
005 90 119	1000	130 mm	25 mm hole	24	KG 0.680
005 90 151	60	130 mm	35 mm hole	24	KG 0.666
005 90 153	80	130 mm	35 mm hole	24	KG 0.666
005 90 155	120	130 mm	35 mm hole	24	KG 0.666
005 90 157	220	130 mm	35 mm hole	24	KG 0.666
005 90 159	280	130 mm	35 mm hole	24	KG 0.666
005 90 161	320	130 mm	35 mm hole	24	KG 0.666
005 90 163	400	130 mm	35 mm hole	24	KG 0.666
005 90 165	600	130 mm	35 mm hole	24	KG 0.666
005 90 167	800	130 mm	35 mm hole	24	KG 0.666
005 90 169	1000	130 mm	35 mm hole	24	KG 0.666
005 90 201	60	130 mm	50 mm hole	24	KG 0.597
005 90 203	80	130 mm	50 mm hole	24	KG 0.597
005 90 205	120	130 mm	50 mm hole	24	KG 0.597
005 90 207	220	130 mm	50 mm hole	24	KG 0.597
005 90 209	280	130 mm	50 mm hole	24	KG 0.597
005 90 211	320	130 mm	50 mm hole	24	KG 0.597
005 90 213	400	130 mm	50 mm hole	24	KG 0.597
005 90 215	600	130 mm	50 mm hole	24	KG 0.597
005 90 217	800	130 mm	50 mm hole	24	KG 0.597
005 90 219	1000	130 mm	50 mm hole	24	KG 0.597
005 90 241	60	130 mm	75 mm hole	24	KG 0.560
005 90 243	80	130 mm	75 mm hole	24	KG 0.560
005 90 245	120	130 mm	75 mm hole	24	KG 0.560
005 90 245	220	130 mm	75 mm hole	24	KG 0.560
005 90 245	280	130 mm	75 mm hole	24	KG 0.560
005 90 245	320	130 mm	75 mm hole	24	KG 0.560
005 90 245	400	130 mm	75 mm hole	24	KG 0.560
005 90 245	600	130 mm	75 mm hole	24	KG 0.560
005 90 245	800	130 mm	75 mm hole	24	KG 0.560
005 90 245	1000	130 mm	75 mm hole	24	KG 0.560



CHAMFERING POLYESTER SYNTHETIC WHEELS

Chamfering synthetic wheels available in 100 mm and 130 mm diameter, for creating bevels on granite.

Features:

To allow you to obtain a perfect bevel, according to the features of your machine, the 130 mm wheel is available in several inner hole sizes and shapes, namely: small circular hole 25 mm in diameter, medium-small circular hole 35 mm in diameter, medium circular hole 50 mm in diameter and large hexagonal hole 75 mm in diameter. They can also be used on natural and agglomerate marble, stone and onyx.

TYPES:

 
HARD MEDIUM

CHAMFERING WHEELS (BEVELS)

CODE	GRITS	OUTER DIAMETER	TYPE	UNIT WEIGHT
001 65 210	60	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 215	80	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 220	120	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 225	220	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 230	320	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 235	400	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 240	500	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 245	600	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 250	800	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 255	1000	130 mm	25 mm hole low profile 11.2 mm H.	KG 0.435
001 65 270	60	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 275	80	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 280	120	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 285	220	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 290	320	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 295	400	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 300	500	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 305	600	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 310	800	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 315	1000	130 mm	130mm-25mm hole high profile 24.6mm	KG 0.706
001 65 001	60	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 005	80	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 010	120	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 015	220	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 020	320	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 025	400	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 030	500	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 035	600	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 040	800	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 045	1000	130 mm	50 mm hole low profile 11.2 mm H.	KG 0.365
001 65 060	60	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 065	80	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 070	120	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 075	220	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 080	320	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 085	400	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 090	500	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 095	600	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 100	800	130 mm	50mm hole high profile 24.6mm	KG 0.750
001 65 105	1000	130 mm	50mm hole high profile 24.6mm	KG 0.750



ADRIALUX CHAMFERING DIAMOND WHEELS

"Adrialux" synthetic bond diamond wheels, available in 130 mm diameter and various abrasive depths, designed for creating bevels on granite.

Features:

To allow you to obtain a perfect bevel, according to the features of your machine, this 130 mm wheel is available in two inner hole sizes, namely: 25 mm (small hole) and 50 mm (medium hole). As compared to synthetic silicon carbide wheels, these products provide a very long life, which means reduced downtime for abrasive change. They can also be used on natural and agglomerate marble, stone and onyx.

METAL BOND DIAMOND TOOLS FOR USE WITH FLOOR SMOOTHING MACHINES

CODE	GRITS	SEGMENTS	SEGMENT SIZE	UNIT WEIGHT
035 92 005	0	5	24 x 15 x 10	KG 0.667
035 92 010	1	5	24 x 15 x 10	KG 0.667
035 92 015	2	5	24 x 15 x 10	KG 0.667
035 92 020	3	5	24 x 15 x 10	KG 0.667



METAL BOND DIAMOND FLOOR SMOOTHERS FOR GRANITE

Metal bond diamond tools designed for smoothing granite floors on the job site.

Types:

 HARD
  MEDIUM

CODE	GRITS	SEGMENTS	SEGMENT SIZE	UNIT WEIGHT
035 92 205	0	5	24 x 15 x 10	KG 0.667
035 92 210	1	5	24 x 15 x 10	KG 0.667
035 92 215	2	5	24 x 15 x 10	KG 0.667
035 92 220	3	5	24 x 15 x 10	KG 0.667



METAL BOND DIAMOND FLOOR SMOOTHERS FOR PORPHYRY

Metal bond diamond tools designed for smoothing porphyry floors on the job site.

TERZAGO STYLE HONING WHEELS FOR USE WITH FLOOR MACHINES

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 77 001	16	36	KG 0.990
005 77 003	24	36	KG 0.990
005 77 005	36	36	KG 0.990
005 77 007	60	36	KG 0.990
005 77 009	120	36	KG 0.990
005 77 011	220	36	KG 0.990
005 77 013	320	36	KG 0.990
005 77 015	400	36	KG 0.990
005 77 017	600	36	KG 0.990
005 77 019	800	36	KG 0.990
005 77 021	1000	36	KG 0.990
005 77 023	1200	36	KG 0.990



100 MM MAGNESITE HONING WHEELS WITH TERZAGO FITTING

Magnesite honing wheels with Terzago fitting, 100 mm in diameter, for honing and pre-polishing granite floors on the job site.

CODE	GRITS	UNIT WEIGHT
001 25 200	60	KG 0.480
001 25 205	80	KG 0.480
001 25 210	120	KG 0.480
001 25 215	150	KG 0.480
001 25 220	220	KG 0.480
001 25 225	320	KG 0.480
001 25 230	400	KG 0.480
001 25 235	600	KG 0.480
001 25 240	800	KG 0.480
001 25 245	1000	KG 0.480
001 25 250	1500	KG 0.480
001 25 255	3000	KG 0.480
001 25 260	5000	KG 0.480



ADRIALUX HIGH PROFILE HONING WHEELS WITH TERZAGO FITTING

"Adrialux" high profile wheels with Terzago fitting, 100 mm in diameter, for honing and pre-polishing granite floors on the job site.

Features:

These abrasives offer remarkable advantages in the processing of granite, namely: very high cutting action, very long life resulting in reduced downtime for abrasive change, no problems due to ageing of the binder and very low weight, which allows for a drastic reduction in transport costs.

TERZAGO STYLE POLISHING WHEELS FOR USE WITH FLOOR MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 79 001	36	KG 0.926




100 MM MAGNESITE POLISHING WHEELS WITH TERZAGO FITTING

Polishing wheels with Terzago fitting, 100 mm in diameter, for polishing granite floors on the job site.

HONING WHEELS WITH SCREW COUPLING FOR USE WITH FLOOR MACHINES

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
005 73 001	16	36	KG 0.817
005 73 003	24	36	KG 0.817
005 73 005	36	36	KG 0.817
005 73 007	60	36	KG 0.817
005 73 009	120	36	KG 0.817
005 73 011	220	36	KG 0.817
005 73 013	320	36	KG 0.817
005 73 015	400	36	KG 0.817
005 73 017	600	36	KG 0.817
005 73 019	800	36	KG 0.817
005 73 021	1000	36	KG 0.817
005 73 023	1200	36	KG 0.817



100 MM MAGNESITE WHEELS WITH SCREW COUPLING

Magnesite grinding wheels with screw coupling, 100 mm in diameter, for honing and pre-polishing granite floors on the job site.

TERZAGO STYLE POLISHING WHEELS FOR USE WITH FLOOR MACHINES

CODE	GRITS	UNIT WEIGHT
001 25 065	60	KG 0.526
001 25 070	80	KG 0.526
001 25 075	120	KG 0.526
001 25 080	150	KG 0.526
001 25 085	220	KG 0.526
001 25 090	320	KG 0.526
001 25 095	400	KG 0.526
001 25 100	600	KG 0.526
001 25 105	800	KG 0.526
001 25 110	1000	KG 0.526
001 25 115	1500	KG 0.526
001 25 120	3000	KG 0.526
001 25 125	5000	KG 0.526



ADRIALUX 100 MM HIGH PROFILE WHEELS WITH SCREW COUPLING

"Adrialux" high-profile diamond wheels with screw coupling, 100 mm in diameter, for honing and pre-polishing granite floors on the job site.

Features:

These abrasives offer remarkable advantages in the processing of granite, namely: very high cutting action, very long life resulting in reduced downtime for abrasive change, no problems due to ageing of the binder and very low weight, which allows for a drastic reduction in transport costs.

TERZAGO STYLE POLISHING WHEELS FOR USE WITH FLOOR MACHINES

CODE	PCS PER CASE	UNIT WEIGHT
005 75 001	36	KG. 0.772



100 MM POLISHING WHEELS WITH SCREW COUPLING

Polishing wheels with screw coupling, 100 mm in diameter, for polishing granite floors on the job site.

POLISHING POWDERS FOR USE WITH FLOOR POLISHING MACHINES

CODE	PACKAGING
005 88 005	2 KG tin
005 88 003	5 KG tin
005 88 001	20 KG tin



DARK GRANITE POLISHING POWDER – TYPE A

Type A polishing powder for polishing granite on the job site with a floor machine or by hand.

Features:

Thanks to carefully selected raw materials, this powder provides an excellent gloss finish on all types of granite, especially difficult to polish dark granites.

CODE	PACKAGING
005 88 011	2 KG tin
005 88 009	5 KG tin
005 88 007	20 KG tin



LIGHT GRANITE POLISHING POWDER – TYPE B

Type B polishing powder for polishing granite on the job site with a floor machine or by hand.

Features:

This polishing powder provides a good gloss finish on all types of granite.

CODE	PACKAGING
005 88 015	2 KG bag
005 88 016	5 KG bag
005 88 018	25 KG bag



TIN OXIDE

99.9% pure tin oxide polishing powder for polishing granite on the job site with a floor machine or by hand.

Features:

This polishing powder creates a mirror finish on all types of granite.

CODE	UNIT WEIGHT
015 10 001	KG 0.070



FRANKFURT PLASTIC HOLDERS

Plastic holders for Frankfurt abrasives.

CODE	UNIT WEIGHT
015 10 005	KG 0.012



RIGHT AND LEFT PLASTIC HOLDERS FOR FRANKFURT ABRASIVES

Right and left plastic holders for Frankfurt abrasives.

CODE	UNIT WEIGHT
015 10 010	KG 0.043



RIGHT AND LEFT ALUMINIUM HOLDERS FOR FRANKFURT ABRASIVES

Right and left aluminium holders for Frankfurt abrasives.

ACCESSORIES FOR ABRASIVES

CODE	OUTER DIAMETER
015 10 015	250 mm
015 10 017	300 mm



PLASTIC PLATES FOR MÜNCHEN SEGMENTS

Plastic plates, available in 250 mm or 300 mm diameter, designed to hold München segments.

CODE
015 10 020



RIGHT AND LEFT PLASTIC HOLDERS FOR MÜNCHEN SEGMENTS

Right and left plastic holders for München segments.

CODE	OUTER DIAMETER	FITTING	UNIT WEIGHT
015 10 030	130 mm	M 30	
015 10 035	130 mm	M 20	
015 10 040	150 mm	M 30	



ALUMINIUM BACK-UP PADS WITH THREAD, FOR USE ON EDGE POLISHING MACHINES

Aluminium back-up pads with right or left snail lock, available in 130 mm or 150 mm diameter, with threaded connection, designed to hold edge honing abrasives.

CODE	OUTER DIAMETER	FITTING	UNIT WEIGHT
015 10 050	100 mm	MA 14	KG 0.273
015 10 060	130 mm	MA 14	KG 0.426



ALUMINIUM/RUBBER BACK-UP PADS WITH THREAD, FOR USE ON EDGE POLISHING MACHINES

Back-up pads made of aluminium and rubber, with right or left snail lock, available in 130 mm or 150 mm diameter, with threaded connection, designed to hold abrasives for edge polishing machines.

CODE	OUTER DIAMETER	UNIT WEIGHT
015 10 045	130 mm	KG 0.425



ALUMINIUM FLAT BACK-UP PADS FOR USE ON EDGE POLISHING MACHINES

Aluminium flat back-up pads with right or left snail lock, designed to hold abrasives for edge polishing machines.

CODE	TYPE
015 10 015	Adaptor 250 mm
015 10 017	KIT (plate and pins)

MAGNETIC ADAPTER + CONVERSION KIT FOR PLATES

250 mm magnetic adapter plus conversion kit, designed to convert a standard plate to a magnetic coupling plate, for use on single-head machines (radial arm machines).

ACCESSORIES FOR ABRASIVES

CODE	GRITS	UNIT WEIGHT
015 10 065	holder Ø 100	KG 1.3
005 73 070	holder Ø 120	KG. 1.3
005 73 074	tool for coupling and uncoupling Terzago wheels	KG. 1.3
005 73 007	wrench for steel holder	KG 0.5



STEEL HOLDERS WITH THREAD FOR TERZAGO WHEELS + ACCESSORIES

Steel holders, available in 100 mm or 120 mm diameter, with threaded connection (diameter on request), designed to hold Terzago style wheels.

MANUAL APPLICATIONS: METAL BOND DIAMOND WHEELS

CODE	OUTER DIAMETER	GRITS	FITTING
035 35 210	100 mm	coarse (green)	MA 14
035 35 205	100 mm	medium (yellow)	MA 14
035 35 215	125 mm	coarse (green)	MA 14



PLUS MA14 METAL BOND DIAMOND CUP WHEELS

"PLUS" metal bond diamond cup wheels, available in 100 mm and 125 mm diameter, with MA14 thread. These tools offer superior rough grinding thanks to very high cutting action.

Features:

These cup wheels are designed for wet or dry use and can be used also on concrete.

MANUAL APPLICATIONS: METAL BOND DIAMOND WHEELS

CODE	OUTER DIAMETER	GRITS	FITTING
035 35 005	100 mm	0 (coarse)	MA 14
035 35 010	100 mm	1 (medium)	MA 14
035 35 015	100 mm	2 (fine)	MA 14



GOLDEN MA14 METAL BOND DIAMOND CUP WHEELS

Golden metal bond diamond cup wheels, 100 mm in diameter, with MA14 thread. These tools offer a compromise between good grinding efficiency and reasonable cost.

Features:

These cup wheels are designed for wet or dry use and can be used also on concrete.

CODE	OUTER DIAMETER	GRITS	FITTING
035 35 150	mm 100	0 (coarse)	MA 14
035 35 035	mm 125	0 (coarse)	MA 14
035 35 250	mm 125	0 (coarse)	22.2 mm hole
035 35 260	mm 175	0 (coarse)	22.2 mm hole



GOLD CUP METAL BOND DIAMOND CUP WHEELS

"GOLD CUP" metal bond diamond cup wheels, available in 100 mm, 125 mm and 170 mm diameter, with MA14 thread or 22.2 mm hole. These cup wheels have several holes in them to eliminate the dust generated by the grinding operation and prevent overheating of the tool, particularly during dry use.

Features:

These cup wheels are designed for wet or dry use and can be used also on concrete.

MANUAL APPLICATIONS: METAL BOND DIAMOND WHEELS

CODE	OUTER DIAMETER	RADIUS	FITTING
035 40 172	mm 100	radius 5	MA 14
035 40 174	mm 100	radius 10	MA 14
035 40 176	mm 100	radius 15	MA 14
035 40 178	mm 100	radius 20	MA 14



METAL BOND SINTERED PROFILE WHEELS WITH MA14 THREAD AND ROTARY TOUCHER

Metal bond sintered profile wheels with MA14 thread, 100 mm in diameter, with various radius sizes, for half and full bullnose profiles.

Features:

Wet or dry use.

CODE	OUTER DIAMETER	FITTING
035 50 225	70 mm Ø x 35 mm h	MA 14



METAL BOND SEGMENTED GRINDING WHEELS WITH MA14 THREAD


Metal bond 16-segment grinding wheels, 70 mm diameter x 35 mm high, with MA 14 thread.

Features:

For wet use only.

MANUAL APPLICATIONS: DIAMOND-RESIN DISCS

CODE	OUTER DIAMETER	GRITS
001 70 370	100 mm	50
001 70 371	100 mm	100
001 70 372	100 mm	200
001 70 373	100 mm	400
001 70 374	100 mm	800
001 70 375	100 mm	1500
001 70 376	100 mm	3000
001 70 378	100 mm	Lux White
001 70 379	100 mm	Lux Black

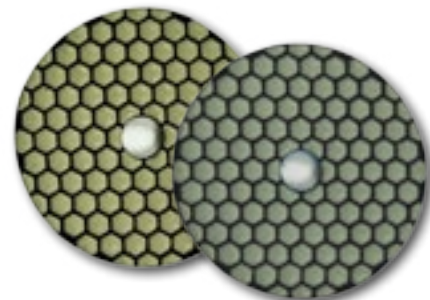


ADRIALUX FLEXIBLE DIAMOND DISCS FOR DRY USE

"Adrialux" QRS Velcro backed flexible diamond discs for dry use, available in 100 mm diameter.

Features:

Also suitable for natural marble, stone and onyx.

CODE	OUTER DIAMETER	GRITS
001 70 001	80 mm	40
001 70 005	80 mm	60
001 70 010	80 mm	80
001 70 015	80 mm	120
001 70 020	80 mm	200
001 70 025	80 mm	300
001 70 030	80 mm	400
001 70 040	80 mm	600
001 70 045	80 mm	800
001 70 055	80 mm	1500
001 70 065	80 mm	3000
001 70 070	80 mm	6000
001 70 076	80 mm	Lux White
001 70 077	80 mm	Lux Black
001 70 205	100 mm	40
001 70 210	100 mm	60
001 70 215	100 mm	80
001 70 220	100 mm	120
001 70 225	100 mm	200
001 70 230	100 mm	300
001 70 235	100 mm	400
001 70 245	100 mm	600
001 70 250	100 mm	800
001 70 260	100 mm	1500
001 70 270	100 mm	3000
001 70 280	100 mm	6000
001 70 282	100 mm	Lux White
001 70 283	100 mm	Lux Black
001 70 290	100 mm	40 Gold
001 70 295	100 mm	60 Gold
001 70 300	100 mm	80 Gold
001 70 305	100 mm	120 Gold
001 70 310	100 mm	200 Gold
001 70 315	100 mm	300 Gold
001 70 320	100 mm	400 Gold
001 70 330	100 mm	600 Gold

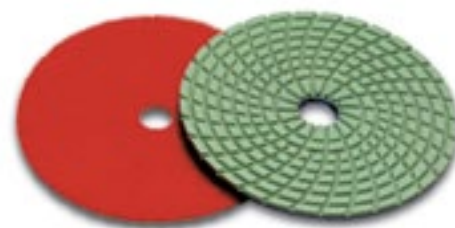

ADRIALUX FLEXIBLE DIAMOND DISCS FOR WET USE


"Adrialux" QRS Velcro backed flexible diamond discs for wet use, available in 80 mm, 100 mm and 125 mm diameter.

Features:

The "Gold" line has been especially formulated to achieve an excellent polish with fewer passes, using the various grits. Also suitable for natural marble, stone and onyx.

CODE	OUTER DIAMETER	GRITS
001 70 335	100 mm	800 Gold
001 70 345	100 mm	1500 Gold
001 70 355	100 mm	3000 Gold
001 70 360	100 mm	6000 Gold
001 70 368	100 mm	Lux White Gold
001 70 369	100 mm	Lux Black Gold
001 70 805	125 mm	40
001 70 810	125 mm	60
001 70 815	125 mm	80
001 70 820	125 mm	120
001 70 825	125 mm	200
001 70 830	125 mm	300
001 70 835	125 mm	400
001 70 845	125 mm	600
001 70 850	125 mm	800
001 70 860	125 mm	1500
001 70 870	125 mm	3000
001 70 875	125 mm	6000
001 70 882	125 mm	Lux White
001 70 883	125 mm	Lux Black

CODE	OUTER DIAMETER	GRITS
001 70 552	100 mm	1
001 70 553	100 mm	2
001 70 554	100 mm	3

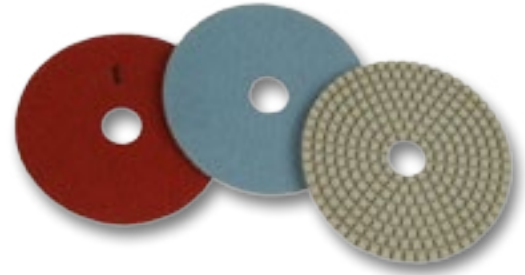

ADRIALUX ULTRAFAST DIAMOND DISCS FOR WET OR DRY USE

"Adrialux" QRS Velcro backed flexible diamond discs for wet or dry use, available in 100 mm diameter.

Features:

These discs are formulated to achieve a good polish using just three grits, which means saving time. They create a higher degree of polish when used with water, but offer good results even when used dry.

CODE	OUTER DIAMETER	GRITS
001 70 194	100 mm	50
001 70 195	100 mm	100
001 70 196	100 mm	200
001 70 197	100 mm	400
001 70 198	100 mm	800
001 70 199	100 mm	1500
001 70 200	100 mm	3000
001 70 201	100 mm	Lux White
001 70 202	100 mm	Lux Black



ADRIALUX CONVEX DIAMOND DISCS FOR WET USE

"Adrialux" convex diamond discs for wet use, with QRS Velcro backing, available in 100 mm diameter.

Features:

These discs are ideal to hone and polish shaped surfaces. Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: DIAMOND PADS

CODE	GRITS	COLOUR
001 83 000	1 (60)	green
001 83 001	2 (100)	black
001 83 005	3 (200)	red
001 83 010	4 (400)	yellow
001 83 015	5 (500)	white
001 83 020	6 (1000)	blue
001 83 025	7 (8000)	orange
001 83 030	complete set of 7 pieces	



DIAMOND HAND PADS 90 X 55 MM

Diamond hand pads, size 90 x 55 mm.

Features:

Also suitable for natural marble, stone and onyx.

CODE	GRITS	COLOUR
001 83 045	1 (60)	green
001 83 050	2 (100)	black
001 83 055	3 (200)	red
001 83 060	4 (400)	yellow
001 83 065	5 (500)	white
001 83 070	6 (1000)	blue
001 83 075	7 (8000)	orange
001 83 080	complete set of 7 pieces	



V30 SHAPED DIAMOND HAND PADS

100 X 55 MM

V30 shaped diamond hand pads for honing 3cm-thick bullnose edges. Size 100 x 55 mm.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: DIAMOND BELTS

CODE	DIMENSIONS	GRITS	COLOURS
001 83 205	30 x 30 mm	1 (60)	green
001 83 210	30 x 30 mm	2 (100)	black
001 83 215	30 x 30 mm	3 (200)	red
001 83 220	30 x 30 mm	4 (400)	yellow
001 83 225	30 x 30 mm	5 (500)	white
001 83 230	30 x 30 mm	6 (1000)	blue
001 83 235	30 x 30 mm	7 (8000)	orange
001 83 240	50 x 42 mm	1 (60)	green
001 83 245	50 x 42 mm	2 (100)	black
001 83 250	50 x 42 mm	3 (200)	red
001 83 255	50 x 42 mm	4 (400)	yellow
001 83 260	50 x 42 mm	5 (500)	white
001 83 265	50 x 42 mm	6 (1000)	blue
001 83 270	50 x 42 mm	7 (8000)	orange
001 83 275	75 x 38 mm	1 (60)	green
001 83 280	75 x 38 mm	2 (100)	black
001 83 285	75 x 38 mm	3 (200)	red
001 83 290	75 x 38 mm	4 (400)	yellow
001 83 295	75 x 38 mm	5 (500)	white
001 83 300	75 x 38 mm	6 (1000)	blue
001 83 305	75 x 38 mm	7 (8000)	orange
001 83 310	75 x 38 mm	1 (60)	green
001 83 315	75 x 38 mm	2 (100)	black
001 83 320	75 x 38 mm	3 (200)	red
001 83 325	75 x 38 mm	4 (400)	yellow
001 83 330	75 x 38 mm	5 (500)	white
001 83 335	75 x 38 mm	6 (1000)	blue
001 83 340	75 x 38 mm	7 (8000)	orange
001 83 345	100 x 38 mm	1 (60)	green
001 83 350	100 x 38 mm	2 (100)	black
001 83 355	100 x 38 mm	3 (200)	red
001 83 360	100 x 38 mm	4 (400)	yellow
001 83 365	100 x 38 mm	5 (500)	white
001 83 370	100 x 38 mm	6 (1000)	blue
001 83 375	100 x 38 mm.	7 (8000)	orange



DIAMOND BELTS

Diamond belts, available in the following sizes: 30 x 30 mm - 50 x 42 mm - 75 x 38 - 100 x 38 mm.

Features:

Also suitable for natural marble, stone and onyx.

CODE	DIMENSIONS	GRITS	COLOUR	FITTING
001 83 475	120 x 70 mm	60	green	Velcro QRS
001 83 480	120 x 70 mm	100	black	Velcro QRS
001 83 485	120 x 70 mm	200	red	Velcro QRS
001 83 490	120 x 70 mm	400	yellow	Velcro QRS
001 83 494	120 x 70 mm	500	white	Velcro QRS
001 83 495	120 x 70 mm	500	white N	Velcro QRS
001 83 500	120 x 70 mm	1000	blue	Velcro QRS
001 83 505	120 x 70 mm	8000	orange	Velcro QRS
001 83 510	230 x 280 mm	60	green	adhesive
001 83 515	230 x 280 mm	100	black	adhesive
001 83 520	230 x 280 mm	200	red	adhesive
001 83 525	230 x 280 mm	400	yellow	adhesive
001 83 529	230 x 280 mm	500	white N	adhesive
001 83 530	230 x 280 mm	500	white	adhesive
001 83 535	230 x 280 mm	1000	blue	adhesive
001 83 540	230 x 280 mm	8000	orange	adhesive
001 83 545	230 x 280 mm	60	green	canvas
001 83 550	230 x 280 mm	100	black	canvas
001 83 555	230 x 280 mm	200	red	canvas
001 83 560	230 x 280 mm	400	yellow	canvas
001 83 565	230 x 280 mm	500 N	white	canvas
001 83 570	230 x 280 mm	500 R	white	canvas
001 83 575	230 x 280 mm	1000	blue	canvas
001 83 580	230 x 280 mm	8000	orange	canvas
001 83 615	triangle 8x8 mm	60	green	Velcro QRS
001 83 620	triangle 8x8 mm	100	black	Velcro QRS
001 83 625	triangle 8x8 mm	200	red	Velcro QRS
001 83 630	triangle 8x8 mm	400	yellow	Velcro QRS
001 83 635	triangle 8x8 mm	500	white	Velcro QRS
001 83 640	triangle 8x8 mm	1000	blue	Velcro QRS
001 83 645	triangle 8x8 mm	8000	orange	Velcro QRS

**DIAMOND SHEETS**

Diamond sheets available in various sizes and backings (Velcro QRS, adhesive and canvas).

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: SILICON CARBIDE DISCS

CODE	OUTER DIAMETER	GRITS	PCS PER CASE
010 05 402	115 mm	40	50
010 05 404	115 mm	60	50
010 05 406	115 mm	80	50
010 05 408	115 mm	100	50
010 05 410	115 mm	120	50
010 05 412	115 mm	150	50
010 05 414	115 mm	180	50
010 05 416	115 mm	220	50
010 05 418	115 mm	320	50
010 05 420	115 mm	400	50
010 05 422	115 mm	500	50
010 05 424	115 mm	600	50
010 05 426	115 mm	800	50
010 05 428	115 mm	1200	50
010 05 502	125 mm	40	50
010 05 504	125 mm	60	50
010 05 506	125 mm	80	50
010 05 508	125 mm	100	50
010 05 510	125 mm	120	50
010 05 512	125 mm	150	50
010 05 514	125 mm	180	50
010 05 516	125 mm	220	50
010 05 518	125 mm	320	50
010 05 520	125 mm	400	50
010 05 522	125 mm	500	50
010 05 524	125 mm	600	50
010 05 526	125 mm	800	50
010 05 528	125 mm	1200	50
010 05 602	150 mm	40	50
010 05 604	150 mm	60	50
010 05 606	150 mm	80	50
010 05 608	150 mm	100	50
010 05 610	150 mm	120	50
010 05 612	150 mm	150	50
010 05 614	150 mm	180	50
010 05 616	150 mm	220	50
010 05 618	150 mm	320	50
010 05 620	150 mm	400	50
010 05 622	150 mm	500	50
010 05 624	150 mm	600	50
010 05 626	150 mm	800	50
010 05 628	150 mm	1200	50
010 05 702	180 mm	40	25
010 05 704	180 mm	60	25
010 05 706	180 mm	80	25
010 05 708	180 mm	100	25
010 05 710	180 mm	120	25
010 05 712	180 mm	150	25
010 05 714	180 mm	180	25
010 05 716	180 mm	220	25
010 05 718	180 mm	320	25
010 05 720	180 mm	400	25
010 05 722	180 mm	500	25
010 05 724	180 mm	600	25
010 05 726	180 mm	800	25
010 05 728	180 mm	1200	25



QRS VELCRO-BACKED FLEXIBLE SILICON CARBIDE DISCS

Flexible silicon carbide discs with QRS Velcro backing available in a variety of diameters.

Features:

Also suitable for natural marble, stone and onyx.

CODE	OUTER DIAMETER	GRITS	PCS PER CASE
010 05 202	125 mm S	24	100
010 05 204	125 mm S	36	100
010 05 206	125 mm S	60	100
010 05 208	125 mm S	80	100
010 05 210	125 mm S	100	100
010 05 212	125 mm S	120	100
010 05 214	125 mm S	150	100
010 05 216	125 mm S	180	100
010 05 218	125 mm S	220	100
010 05 220	125 mm S	320	100
010 05 222	125 mm S	400	100
010 05 252	125 mm S 4 slits	24	100
010 05 254	125 mm S 4 slits	36	100
010 05 256	125 mm S 4 slits	60	100
010 05 258	125 mm S 4 slits	80	100
010 05 260	125 mm S 4 slits	120	100
010 05 262	125 mm S 4 slits	180	100
010 05 264	125 mm S 4 slits	220	100
010 05 266	125 mm S 4 slits	320	100
010 05 002	178 mm S	16	25
010 05 004	178 mm S	24	25
010 05 006	178 mm S	36	25
010 05 008	178 mm S	50	25
010 05 010	178 mm S	60	25
010 05 012	178 mm S	80	25
010 05 014	178 mm S	100	25
010 05 016	178 mm S	120	25
010 05 018	178 mm S	150	25
010 05 020	178 mm S	180	25
010 05 022	178 mm S	220	25
010 05 024	178 mm S	280	25
010 05 026	178 mm S	320	25
010 05 028	178 mm S	400	25
010 05 032	178 mm Z	16	25
010 05 034	178 mm Z	24	25
010 05 036	178 mm Z	36	25
010 05 038	178 mm Z	50	25
010 05 040	178 mm Z	60	25
010 05 042	178 mm Z	80	25
010 05 044	178 mm Z	100	25
010 05 046	178 mm Z	120	25
010 05 048	178 mm Z	150	25
010 05 050	178 mm Z	180	25
010 05 052	178 mm Z	220	25
010 05 054	178 mm Z	280	25
010 05 056	178 mm Z	320	25
010 05 058	178 mm Z	400	25
010 05 102	178 mm w/holes D.S. Z.	36	25
010 05 104	178 mm w/holes D.S. Z.	50	25
010 05 106	178 mm w/holes D.S. Z.	60	25
010 05 108	178 mm w/holes D.S. Z.	80	25
010 05 110	178 mm w/holes D.S. Z.	100	25
010 05 112	178 mm w/holes D.S. Z.	120	25
010 05 114	178 mm w/holes D.S. Z.	150	25
010 05 116	178 mm w/holes D.S. Z.	180	25
010 05 118	178 mm w/holes D.S. Z.	220	25
010 05 120	178 mm w/holes D.S. Z.	280	25
010 05 122	178 mm w/holes D.S. Z.	320	25
010 05 124	mm. 178 w/holes D.S. Z.	400	25



FLEXIBLE SILICON CARBIDE DISCS WITH 22.2 MM HOLE

Silicon carbide flexible discs with 22.2 mm centre hole (flange fitting), available in a variety of diameters.

Features:

The 125 mm diameter type with 4 slits is designed to let the disc adhere perfectly to the backer. The 178 mm dia. type with holes allows the disc to run cooler, which results in improved cutting action; additionally, the double-layer version (D.S.) provides longer life than standard discs. These discs are also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: SILICON CARBIDE DISCS

CODE	OUTER DIAMETER	GRITS	PCS PER CASE
010 10 202	125 mm Z	16	5
010 10 204	125 mm Z	24	5
010 10 206	125 mm Z	36	5
010 10 208	125 mm Z	50	5
010 10 210	125 mm Z	60	5
010 10 212	125 mm Z	80	5
010 10 214	125 mm Z	120	5
010 10 216	125 mm Z	220	5
010 10 218	125 mm Z	280	5
010 10 220	125 mm Z	320	5
010 10 002	178 mm Z	16	5
010 10 004	178 mm Z	24	5
010 10 006	178 mm Z	36	5
010 10 008	178 mm Z	50	5
010 10 010	178 mm Z	60	5
010 10 012	178 mm Z	80	5
010 10 014	178 mm Z	120	5
010 10 016	178 mm Z	150	5
010 10 018	178 mm Z	180	5
010 10 020	178 mm Z	220	5
010 10 022	178 mm S	320	5
010 10 030	178 mm S	24	5
010 10 032	178 mm S	36	5
010 10 034	178 mm S	50	5
010 10 036	178 mm S	60	5
010 10 038	178 mm S	80	5
010 10 040	178 mm S	120	5



SEMI-RIGID SILICON CARBIDE DISCS WITH 22.2 MM HOLE

Semi-rigid silicon carbide discs with 22.2 mm centre hole (flange fitting), available in a variety of diameters.

Features:

Also suitable for natural marble, stone and onyx.

CODE	OUTER DIAMETER	GRITS	PCS PER CASE
010 25 302	110	40	20
010 25 304	110	60	20
010 25 306	110	120	20
010 25 308	110	220	20
010 25 310	110	320	20
010 25 352	165	40	10
010 25 354	165	60	10
010 25 356	165	120	10
010 25 358	165	150	10
010 25 360	165	220	10
010 05 362	165	320	10



SILICON CARBIDE FLAP DISCS WITH 22.2 MM HOLE

Silicon carbide flap discs with 22.2 mm centre hole (flange fitting) available in 110 mm and 165 mm diameter.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: SILICON CARBIDE CUP WHEELS

CODE	OUTER DIAMETER	GRITS	FITTING	PCS PER CASE
010 20 602	85/75	16	22.2 mm hole	36
010 20 604	85/75	24	22.2 mm hole	36
010 20 606	85/75	36	22.2 mm hole	36
010 20 608	85/75	60	22.2 mm hole	36
010 20 610	85/75	80	22.2 mm hole	36
010 20 612	85/75	120	22.2 mm hole	36
010 20 614	85/75	150	22.2 mm hole	36
010 20 616	85/75	180	22.2 mm hole	36
010 20 618	85/75	220	22.2 mm hole	36
010 20 620	85/75	320	22.2 mm hole	36
010 20 622	85/75	400	22.2 mm hole	36
010 20 624	85/75	600	22.2 mm hole	36
010 20 560	85/75	16	MA 14	36
010 20 561	85/75	24	MA 14	36
010 20 562	85/75	36	MA 14	36
010 20 563	85/75	60	MA 14	36
010 20 564	85/75	80	MA 14	36
010 20 565	85/75	120	MA 14	36
010 20 566	85/75	150	MA 14	36
010 20 567	85/75	180	MA 14	36
010 20 568	85/75	220	MA 14	36
010 20 569	85/75	320	MA 14	36
010 20 570	85/75	400	MA 14	36
010 20 571	85/75	600	MA 14	36
010 20 575	85/75	16	5/8"	36
010 20 576	85/75	24	5/8"	36
010 20 577	85/75	36	5/8"	36
010 20 578	85/75	60	5/8"	36
010 20 579	85/75	80	5/8"	36
010 20 580	85/75	120	5/8"	36
010 20 581	85/75	150	5/8"	36
010 20 582	85/75	180	5/8"	36
010 20 583	85/75	220	5/8"	36
010 20 584	85/75	320	5/8"	36
010 20 585	85/75	400	5/8"	36
010 20 586	85/75	600	5/8"	36



CONICAL CUP WHEELS MADE FROM SILICON CARBIDE, MIGNON TYPE

Conical cup wheels made from silicon carbide, Mignon type, 75/85 mm in diameter, available with various fitting options: 22.2 mm hole (flange fitting), MA14 thread and 5/8 thread. These wheels can be used up to 11,000 rpm.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: SILICON CARBIDE CUP WHEELS

CODE	OUTER DIAMETER	GRITS	FITTING	PCS PER CASE
010 20 432	110/90	16	22.2 mm hole	36
010 20 434	110/90	24	22.2 mm hole	36
010 20 436	110/90	36	22.2 mm hole	36
010 20 438	110/90	60	22.2 mm hole	36
010 20 440	110/90	80	22.2 mm hole	36
010 20 442	110/90	120	22.2 mm hole	36
010 20 444	110/90	150	22.2 mm hole	36
010 20 446	110/90	180	22.2 mm hole	36
010 20 448	110/90	220	22.2 mm hole	36
010 20 450	110/90	320	22.2 mm hole	36
010 20 452	110/90	400	22.2 mm hole	36
010 20 454	110/90	500	22.2 mm hole	36
010 20 456	110/90	600	22.2 mm hole	36
010 20 462	110/90	16	MA 14	36
010 20 464	110/90	24	MA 14	36
010 20 466	110/90	36	MA 14	36
010 20 468	110/90	60	MA 14	36
010 20 470	110/90	80	MA 14	36
010 20 472	110/90	120	MA 14	36
010 20 474	110/90	150	MA 14	36
010 20 476	110/90	180	MA 14	36
010 20 478	110/90	220	MA 14	36
010 20 480	110/90	320	MA 14	36
010 20 482	110/90	400	MA 14	36
010 20 484	110/90	500	MA 14	36
010 20 486	110/90	600	MA 14	36
010 20 532	110/90	16	5/8"	36
010 20 534	110/90	24	5/8"	36
010 20 536	110/90	36	5/8"	36
010 20 538	110/90	60	5/8"	36
010 20 540	110/90	80	5/8"	36
010 20 542	110/90	120	5/8"	36
010 20 544	110/90	150	5/8"	36
010 20 546	110/90	180	5/8"	36
010 20 548	110/90	220	5/8"	36
010 20 550	110/90	320	5/8"	36
010 20 552	110/90	400	5/8"	36
010 20 554	110/90	500	5/8"	36
010 20 556	110/90	600	5/8"	36



CONICAL CUP WHEELS MADE FROM SILICON CARBIDE

Conical cup wheels made from silicon carbide, 110/90 mm in diameter, available with various fitting options: 22.2 mm hole (flange fitting), MA14 thread and 5/8 thread. These wheels can be used up to 8,500 rpm.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: SILICON CARBIDE WHEELS

CODE	OUTER DIAMETER	GRITS	FITTING	PCS PER CASE
010 20 632	85/75	16	MA14	36
010 20 634	85/75	24	MA14	36
010 20 636	85/75	36	MA14	36
010 20 638	85/75	60	MA14	36
010 20 640	85/75	80	MA14	36
010 20 642	85/75	120	MA14	36
010 20 644	85/75	150	MA14	36
010 20 646	85/75	180	MA14	36
010 20 648	85/75	220	MA14	36
010 20 655	85/75	16	22.2 mm hole	36
010 20 656	85/75	24	22.2 mm hole	36
010 20 657	85/75	36	22.2 mm hole	36
010 20 558	85/75	60	22.2 mm hole	36
010 20 559	85/75	80	22.2 mm hole	36
010 20 560	85/75	120	22.2 mm hole	36
010 20 561	85/75	150	22.2 mm hole	36
010 20 562	85/75	180	22.2 mm hole	36
010 20 563	85/75	220	22.2 mm hole	36



CYLINDRICAL WHEELS MADE FROM SILICON CARBIDE, MIGNON TYPE

Cylindrical wheels made from silicon carbide, Mignon type, 80 mm in diameter, available with 22.2 mm hole (flange fitting) and MA14 thread. These wheels can be used up to 11,000 rpm.

Features:

Also suitable for natural marble, stone and onyx.

CODE	OUTER DIAMETER	GRITS	FITTING	PCS PER CASE
010 20 202	Ø100 mm	16	MA14	36
010 20 204	Ø100 mm	24	MA14	36
010 20 206	Ø100 mm	36	MA14	36
010 20 208	Ø100 mm	60	MA14	36
010 20 210	Ø100 mm	80	MA14	36
010 20 212	Ø100 mm	100	MA14	36
010 20 214	Ø100 mm	120	MA14	36
010 20 216	Ø100 mm	150	MA14	36
010 20 218	Ø100 mm	180	MA14	36
010 20 220	Ø100 mm	220	MA14	36
010 20 222	Ø100 mm	320	MA14	36
010 20 224	Ø100 mm	400	MA14	36
010 20 252	Ø100 mm	16	5/8"	36
010 20 254	Ø100 mm	24	5/8"	36
010 20 256	Ø100 mm	36	5/8"	36
010 20 258	Ø100 mm	60	5/8"	36
010 20 260	Ø100 mm	80	5/8"	36
010 20 262	Ø100 mm	100	5/8"	36
010 20 264	Ø100 mm	120	5/8"	36
010 20 266	Ø100 mm	150	5/8"	36
010 20 268	Ø100 mm	180	5/8"	36
010 20 270	Ø100 mm	220	5/8"	36
010 20 272	Ø100 mm	320	5/8"	36
010 20 274	Ø100 mm	400	5/8"	36



CYLINDRICAL WHEELS MADE FROM SILICON CARBIDE


Cylindrical wheels made from silicon carbide, dimensions 100 (Ø) x 40 x 38 mm, available with MA14 thread and 5/8 thread. These wheels can be used up to 8,500 rpm.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: DIAMOND-RESIN CUP WHEELS

CODE	DIAMETER	GRITS	FITTING
001 80 000	100 mm	16	MA 14
001 80 001	100 mm	36	MA 14
010 80 005	100 mm	46	MA 14
010 80 010	100 mm	60	MA 14
010 80 015	100 mm	120	MA 14
010 80 020	100 mm	150	MA 14
010 80 025	100 mm	200	MA 14
010 80 030	100 mm	300	MA 14
010 80 035	100 mm	400	MA 14
010 80 040	100 mm	600	MA 14
010 80 045	100 mm	800	MA 14
010 80 050	100 mm	1500	MA 14
010 80 055	100 mm	3000	MA 14
010 80 060	100 mm	6000	MA 14
010 80 065	100 mm	8000	MA 14
010 80 070	100 mm	10000	MA 14

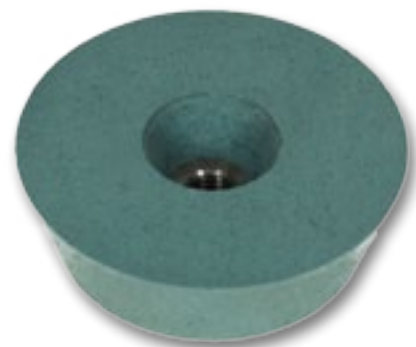

ADRIALUX DIAMOND CUP WHEELS

"Adrialux" diamond cup wheels, 110 mm in diameter, available with MA 14 thread.

Features:

These wheels provide better cutting action and longer life than silicon carbide cup wheels. Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: SILICON CARBIDE FLAP WHEELS

CODE	DIMENSIONS	GRITS	PCS PER CASE
010 25 002	165 mm x 30 mm h	40	5
010 25 004	165 mm x 30 mm h	60	5
010 25 006	165 mm x 30 mm h	80	5
010 25 008	165 mm x 30 mm h	100	5
010 25 010	165 mm x 30 mm h	120	5
010 25 012	165 mm x 30 mm h	150	5
010 25 014	165 mm x 30 mm h	180	5
010 25 016	165 mm x 30 mm h	220	5
010 25 018	165 mm x 30 mm h	320	5



SILICON CARBIDE FLAP WHEELS

Silicon carbide flap wheels, 165 mm in diameter x 30 mm high.

Features:

Also suitable for natural marble, stone and onyx.

CODE	DIMENSIONS
025 35 045	Ø 115 x R.15 mm
025 35 050	Ø 115 x R.20 mm
025 35 055	Ø 115 x R.20 mm
025 35 060	Ø 115 x R.20 mm



MERINO WOOL FELT WHEELS

Merino wool felt wheels, suited for applying polishing pastes, powders or waxes in the final polishing of granite.

Features:

Also suitable for natural marble, stone and onyx.

CODE	DIMENSIONS
025 35 065	Ø 100 x R.40 mm
025 35 070	Ø 130 x R.40 mm



MERINO WOOL FELT WHEELS, SOLID TYPE

Merino wool felt wheels, solid type, suited for applying polishing pastes, powders or waxes in the final polishing of granite. These felt wheels must be bonded to an appropriate backer; the advantage of these products is that, owing to their thickness, they last longer.

Features:

Also suitable for natural marble, stone and onyx.

CODE	OUTER DIAMETER
025 35 036	115 mm
025 35 037	125 mm
025 35 038	178 mm



LAMB WOOL BUFFING PADS

Lamb wool buffing pads, designed for use with waxes to produce a glossy finish on granite. These polishing pads can be mounted on the same backer pads that are used for fiber discs.

Features:

Also suitable for natural marble, agglomerates, stone and onyx.

MANUAL APPLICATIONS: POLISHING PASTE

CODE	COLOURS	PCS PER CASE
025 30 020	grey	35



POLISHING BARS

Polishing paste in bars for high gloss polishing of granite. To be applied with merino wool felt wheels or cloth discs.

MANUAL APPLICATIONS: CLOTH & COTTON DISCS

CODE	OUTER DIAMETER	HOLE
025 35 001	Ø 200	15 mm
025 35 005	Ø 200	20 mm
025 35 010	Ø 200	30 mm
025 35 015	Ø 200	40 mm



CLOTH DISCS

Cloth discs for applying polishing pastes or waxes using a straight grinder, for high gloss polishing of granite.

Features:

Also suitable for natural marble, stone and onyx.

CODE	OUTER DIAMETER	TYPE
025 35 020	Ø 100	cardboard disc (accessory)

CODE	DIMENSIONS	HOLE
025 35 025	Ø 200	20



VENTILATED COTTON DISCS

Ventilated cotton mops for applying polishing pastes or waxes using a straight or angle grinder, for high gloss polishing of granite.

Features:

Also suitable for natural marble, stone and onyx.

SINTERED MOUNTED POINTS

CODE	DIMENSIONS	TYPE
035 55 205	mm 15 x 13	cone shape "A"
035 55 207	mm 15 x 13	cone with radius end "B"
035 55 209	mm 15 x 13	cylinder shape "C"
035 55 211	mm 15 x 13	trapezoid shape "D"
035 55 220	mm 15 x 35	cylinder shape "E"



SINTERED METAL BOND MOUNTED POINTS

Sintered metal bond points mounted on a 6 mm shaft, available in a variety of shapes.

MANUAL APPLICATIONS: MOUNTED FLAP WHEELS

CODE	DIMENSIONS	GRITS	PCS PER CASE
010 25 102	mm 50 x h 10	40	20
010 25 104	mm 50 x h 10	60	20
010 25 106	mm 50 x h 10	80	20
010 25 108	mm 50 x h 10	120	20
010 25 110	mm 50 x h 10	180	20
010 25 112	mm 50 x h 10	240	20
010 25 132	mm 60 x h 15	60	20
010 25 134	mm 60 x h 15	80	20
010 25 136	mm 60 x h 15	120	20
010 25 138	mm 60 x h 15	180	20
010 25 152	mm 60 x h 20	40	20
010 25 154	mm 60 x h 20	60	20
010 25 156	mm 60 x h 20	80	20
010 25 158	mm 60 x h 20	120	20
010 25 160	mm 60 x h 20	180	20
010 25 162	mm 60 x h 20	240	20
010 25 182	mm 60 x h 30	40	20
010 25 184	mm 60 x h 30	60	20
010 25 186	mm 60 x h 30	80	20
010 25 188	mm 60 x h 30	120	20
010 25 190	mm 60 x h 30	180	20
010 25 192	mm 60 x h 30	240	20



MOUNTED SILICON CARBIDE FLAP WHEELS


Silicon carbide flap wheels mounted on a 6 mm shaft, available in a variety of diameters and heights.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: MOUNTED GRINDING POINTS

CODE	DIMENSIONS	SHAPE
010 30 102	mm 50 x 20	cylindrical shape " A "
010 30 104	mm 50 x 10	cylindrical shape " B "
010 30 106	mm 30 x 40	cylindrical shape " C "
010 30 108	mm 30 x 45	cone shape " D "
010 30 110	mm 30 x 50	cone shape " E "
010 30 112	mm 30 x 40	cone shape " F "
010 30 114	mm 25 x 25	cylindrical shape " G "
010 30 116	mm 20 x 40	cylindrical shape " H "
010 30 118	mm 20 x 35	cone shape " I "
010 30 120	mm 15 x 30	cone shape " L "
010 30 122	mm 10 x 15	cylindrical shape " M "

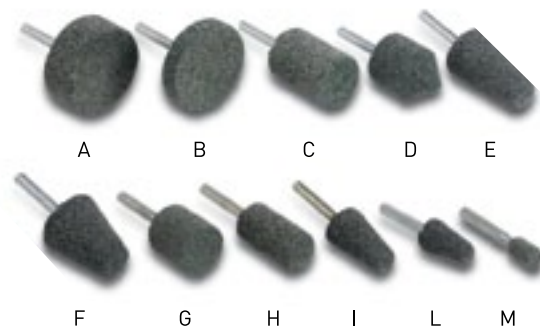

MOUNTED SILICON CARBIDE GRINDING WHEELS


Silicon carbide grinding wheels mounted on a 6 mm shaft, available in a variety of dimensions and shapes.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: MOUNTED FELT POINTS

CODE	DIMENSIONS	TYPE
025 35 103	Ø 50 x 20 mm h	cylinder shape " A "
025 35 105	Ø 20 x 40 mm h	cylinder shape " B "
025 35 110	Ø 20 x 40 mm h	cylinder shape " C "
025 35 115	Ø 20 x 25 mm h	cone shape " D "
025 35 120	Ø 20 x 25 mm h	cone shape " E "

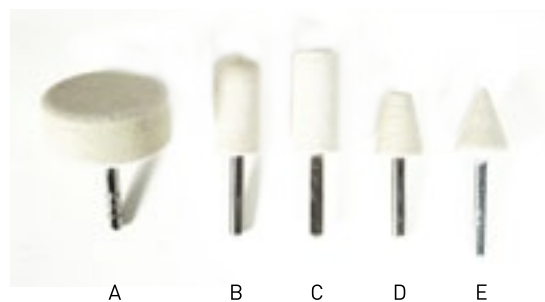

MOUNTED MERINO WOOL FELT POINTS

Merino wool felt points mounted on a 6 mm shaft, suited for applying polishing compounds or waxes in the final polishing of granite.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: MOUNTED CLOTH DISCS

CODE	DIMENSIONS
025 35 125	Ø 80 x 10 mm h



MOUNTED CLOTH DISCS

Cloth discs mounted on a 6 mm shaft, suited for applying polishing pastes or waxes in the final polishing of granite.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: RUBBING BRICKS

CODE	DIMENSIONS	GRITS
010 30 002	mm 200 X 50 x 25	36
010 30 004	mm 200 X 50 x 25	60
010 30 006	mm 200 X 50 x 25	120
010 30 008	mm 200 X 50 x 25	150
010 30 010	mm 200 X 50 x 25	220
010 30 012	mm 200 X 50 x 25	320



SILICON CARBIDE HAND RUBBING BRICKS

Silicon carbide hand rubbing bricks, available in various grit sizes.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: PUMICE STONE

CODE	DIMENSIONS
010 32 002	9 x 6 x 6



PUMICE STONE IN BLOCKS

Hand-held pumice blocks for fine rubbing applications.

Features:

Also suitable for natural marble, stone and onyx.

MANUAL APPLICATIONS: STRAIGHT GRINDERS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 301	BOSCH GGS6 S	1150 W-6800 rpm	KG 3.9
045 05 350	DE WALT 882 - QS	1800 W-5600 rpm	



STRAIGHT GRINDERS

Bosch and DeWalt straight grinders for use with abrasive flap wheels Ø 165 mm and cloth discs Ø 200 mm.

MANUAL APPLICATIONS: STRAIGHT GRINDERS

CODE	TYPE	TECHINICAL DATA	UNIT WEIGHT
045 05 308	Bosch mini GGS 27 L	500 W - 27000 rpm	kg 1.6
045 05 309	Bosch mini GGS 27 LC	600W - 12000÷27000 rpm	kg 1.6
045 05 320	Makita mini GD0600	400 W - 2500 rpm	kg 1.7
045 05 321	Makita mini GD0800C	750 W - 7000÷28000 rpm	kg 1.7



MINI STRAIGHT GRINDERS

Bosch and Makita mini straight grinders for use with tools mounted on a 6 mm shaft (flap wheels, grinding wheels and merino wool felts).

MANUAL APPLICATIONS: ANGLE GRINDERS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 030	BOSCH GWS 22 - 230 JH	2200 W-6500 rpm	KG 5.2
045 05 115	MAKITA GA 9050 R	2000 W-6600 rpm	KG 4.8
045 05 118	MAKITA GA 9020	2200 W-6600 rpm	KG 5.8
045 05 119	MAKITA GA 9030 R	2400 W-6600 rpm	KG 6.5



ANGLE GRINDERS

Bosch and Makita angle grinders for use with cutting discs, flap discs Ø 165 mm, cup wheels, flexible and semi-rigid discs Ø 178 mm.

MANUAL APPLICATIONS: ANGLE GRINDERS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 001	Bosch mini GWS 7-115	720-W - 11000 rpm (Ø115)	KG 1.9
045 05 002	Bosch mini GWS 7-115 E	720-W - 2800÷11000 (Ø115)	KG 1.9
045 05 010	Bosch mini GWS 11-125 CI	1100-W - 11000 rpm (Ø125)	KG 2.0
045 05 011	Bosch mini GWS 11-125 CIE	1100-W - 28000÷11000 rpm (Ø125)	KG 2.0
045 05 016	Bosch mini GWS 14-125 CI	1400 W - 11000 rpm (Ø125)	KG 2.2
045 05 017	Bosch mini GWS 14-125 CIE	1400 W 2800÷11000 rpm (Ø125)	KG 2.2
045 05 104	Makita mini 95 54 NB	710-W - 10000 rpm (Ø115)	KG 1.8
045 05 111	Makita mini 95 61 CVR	1200-W - 28000÷11000 rpm (Ø115)	KG 2.2
045 05 108	Makita mini 95 65 CVR	1400-W - 28000÷11000 rpm (Ø125)	KG 2.2
045 05 055	Flex mini L 1506 VR	1200-W - 2200÷6800 rpm (Ø125)	KG 1.9



MINI ANGLE GRINDERS

Bosch and Makita mini angle grinders for use with cutting discs and MIGNON and diamond-bond cup wheels up to 125 mm in diameter (fixed-speed grinders), or with flexible and semi-rigid discs 115 mm and 125 mm in Ø, flap discs 110 mm in Ø and ADRIALUX dry discs 100 mm in Ø (adjustable speed angle grinders).

MANUAL APPLICATIONS: DRY GRINDERS/POLISHERS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 406	Makita mini 9565 CLR	1400-W - 2000÷6800 rpm (Ø125)	kg 1.9
045 05 405	Makita SA 7000 C	1600-W - 0÷4000 rpm (Ø180)	kg 3.4



MAKITA DRY ANGLE GRINDER

Makita angle grinders for dry use with 110 mm Ø flap discs, 125 mm Ø flexible and semi-rigid discs, 110 mm Ø ADRIALUX dry discs and merino wool felts.

MANUAL APPLICATIONS: LEVIGATRICI / LUCIDATRICI A SECCO

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 427	D26430 - QS	300W - 28000÷44000	Kg. 1.3



PNEUMATIC ORBITAL ANGLE SANDER

De Walt pneumatic orbital angle sander for use with triangular diamond sheets.

MANUAL APPLICATIONS: WET GRINDERS/POLISHERS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 410	Flex LW 1202 V.110	1600-W - 1750 rpm (Ø130 max)	KG 5.1
045 05 411	Flex LW 1202 V.230	1600-W - 1750 rpm (Ø130 max)	KG 5.1
045 05 412	Flex LW 12025 V.230 con PRCD	1600-W - 1750 rpm (Ø130 max)	KG 5.1
045 05 420	Flex LW 17035 V.230 con PRCD	950-W - 3500 rpm (Ø130 max)	KG 2.4



WET GRINDERS/POLISHERS

Wet grinders/polishers for use with resin-bond wet diamond discs and edge honing wheels with small hole.

MANUAL APPLICATIONS: TRANSFORMERS

CODE	TECHNICAL DATA	WEIGHT
045 10 010	2000W - V. 110	KG 27.5
045 10 012	2000W - V. 230	KG 27.5



SEPARATOR TRANSFORMERS

Separator transformers for wet grinders/polishers without PRCD.

MANUAL APPLICATIONS: PNEUMATIC GRINDERS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 440	PA 2 Kirara	2500 rpm (Ø100)	Kg 1.2
045 05 438	MP 4000	4000 rpm (Ø100)	Kg. 1.35



PNEUMATIC ANGLE GRINDERS

Pneumatic angle grinders for use with resin bond wet diamond discs 100 mm in diameter.

MANUAL APPLICATIONS: PNEUMATIC GRINDERS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 442	OS 120	8000 rpm	KG 1.050

CODE	SIZE	TYPE
015 05 195	120 x 70 mm	Plastazote pad w/Velcro QRS



PNEUMATIC ORBITAL SANDER

Pneumatic orbital sander for use with diamond and silicon carbide sheets (size 120 x 70 mm).

Features:

Plastazote pad with QRS Velcro backing for improved flexibility.

MANUAL APPLICATIONS: PNEUMATIC GRINDERS FOR MOUNTED TOOLS

CODE	TYPE	TECHNICAL DATA	WEIGHT
045 05 470	JPG 25 D	25.000 rpm (Ø 3 & Ø 6 mm)	KG 0.700
045 05 471	Mini JPG 260	60.000 rpm (Ø 3 mm)	KG 0.180
045 05 370	SMS 30 DC	24.000 rpm (Ø 6 mm)	KG 0.620



PNEUMATIC GRINDERS FOR SHANK MOUNTED TOOLS

Pneumatic grinder for tools mounted on 6 or 3 mm shaft.

MANUAL APPLICATIONS: ACCESSORIES FOR GRINDERS

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 05 036	Ø 100 mm	MA14	KG 0.161
015 05 040	Ø 115 mm	MA14	KG 0.101
015 05 045	Ø 125 mm	MA14	KG 0.172



RUBBER BACK-UP PADS WITH VELCRO

Rubber back-up pads with QRS Velcro backing, available in a variety of diameters, with MA14 thread, designed to hold Velcro-backed flexible diamond discs and silicon carbide discs.

MANUAL APPLICATIONS: ACCESSORIES FOR GRINDERS

CODE	OUTER DIAMETER	FITTING
015 05 037	Ø 100 mm	MA14



CONVEX RUBBER BACK-UP PADS WITH VELCRO

Convex rubber back-up pads with QRS Velcro backing, available in 100 mm diameter, with MA14 thread, designed to hold Velcro-backed convex flexible discs.

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 05 001	Ø 100 mm	MA14	kg 0.109
015 05 005	Ø 115 mm	MA14	kg 0.112
015 05 015	Ø 125 mm	MA14	kg 0.139
015 05 020	Ø 150 mm	MA14	kg 0.169
015 05 020	Ø 180 mm	MA14	kg 0.230



FOAM BACK-UP PADS WITH VELCRO

Foam + QRS Velcro back-up pads available in a variety of diameters, with MA14 thread, designed to hold Velcro-backed flexible diamond discs and silicon carbide discs.

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 05 049	Ø 100 mm	MA14	kg 0.234



RIGID ALLUMINIUM BACK-UP PADS WITH VELCRO

Aluminium back-up pads with QRS Velcro backing, available in 100 mm diameter with MA14 thread, designed to hold Velcro-backed flexible diamond discs.

CODE	WEIGHT
015 05 200	KG 0.173



ROLL OF VELCRO ADHESIVE TAPE, MALE

Velcro adhesive tape, male, 210 mm x 1000 mm; this tape can be cut to any length to replace the worn-out Velcro on back-up pads

CODE	OUTER DIAMETER	WEIGHT
015 05 205	Ø 100 mm	KG 0.007
015 05 210	Ø 125 mm	KG 0.009



VELCRO ADHESIVE DISCS, MALE

Velcro adhesive discs, male; these discs come in two diameters and are used to replace the worn-out Velcro on back-up pads.

CODE	OUTER DIAMETER	TYPE	WEIGHT
015 15 010	Ø 125 mm	without ring nut 14 mm hole	KG 0.034
015 15 015	Ø 178 mm	without ring nut 14 mm hole	KG 0.070
015 15 020	Ø 125 mm	with ring nut M.A.14 mm	KG 0.098
015 15 028	Ø 125 mm	with ring nut M.A.14 mm	KG 0.108
015 15 030	Ø 165 mm	with ring nut M.A.14 mm	KG 0.161
015 15 027	Ø 170 mm	with ring nut M.A.14 mm	KG 0.165
015 15 025	Ø 178 mm	with ring nut M.A.14 mm	KG 0.170



PLASTIC BACK-UP PADS

Plastic back-up pads available in a variety of diameters, with MA14 thread, with or without MA14 ring nut, designed to hold flexible and semi-rigid silicon carbide discs

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 05 055	Ø 100 mm	MA14	KG 0.097
015 05 060	Ø 115 mm	MA14	KG 0.114
015 05 065	Ø 125 mm	MA14	KG 0.128
015 05 070	Ø 150 mm	MA14	KG 0.092



RIGID BACK-UP PADS WITH VELCRO

Rigid QRS Velcro back-up pads available in various diameters, with MA14 thread, designed to hold Velcro-backed flexible diamond discs and silicon carbide discs.

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 05 073	Ø 100 mm	MA14	KG 0.102
015 05 075	Ø 115 mm	MA14	KG 0.121
015 05 077	Ø 125 mm	MA14	KG 0.137
015 05 080	Ø 150 mm	MA14	KG 0.154
015 05 090	Ø 180 mm	MA14	KG 0.208



SEMI-RIGID BACK-UP PADS WITH VELCRO

Semi-rigid QRS Velcro back-up pads available in various diameters, with MA14 thread, designed to hold Velcro-backed flexible diamond discs and silicon carbide discs.

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 15 095	Ø 100 mm	MA 14	KG 0.048



ABS BACK-UP PADS

ABS back-up pads with MA14 thread, designed to hold adhesive flexible diamond discs.

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 05 100	Ø 100 mm	snail lock	
015 05 105	Ø 130 mm	snail lock	KG 0.152
015 05 110	Ø 130 mm	snail lock	



ABS +PLASTAZOTE BACK-UP PLATES W/VELCRO

Snail lock QRS Velcro back-up plates made from ABS and plastazote, available in various diameters, designed to hold Velcro-backed diamond discs and silicon carbide discs.

CODE	OUTER DIAMETER	FITTING	WEIGHT
015 05 115	Ø 100 mm	snail lock	
015 05 120	Ø 130 mm	snail lock	KG 0.118
015 05 125	Ø 150 mm	snail lock	



ABS BACK-UP PLATES W/VELCRO

Snail lock QRS Velcro back-up plates made from ABS, available in various diameters, designed to hold Velcro-backed diamond discs and silicon carbide discs.

CODE	OUTER DIAMETER	THICKNESS	FITTING	WEIGHT
015 05 170	Ø 100 mm	10 mm	Velcro QRS	KG 0.017
015 05 185	Ø 125 mm	10 mm	Velcro QRS	
015 05 175	Ø 100 mm	2.5 mm	Velcro QRS	KG 0.012
015 05 190	Ø 125 mm	2.5 mm	Velcro QRS	
015 05 165	Ø 100 mm	10 mm	adhesive	KG 0.011
015 05 180	Ø 125 mm	10 mm	adhesive	



PLASTAZOTE DISCS

Plastazote discs available in various diameters and in two thicknesses, to be used in conjunction with the appropriate back-up pads or other supports.

MANUAL APPLICATIONS: ACCESSORIES FOR GRINDERS

CODE	FITTING	WEIGHT
015 15 065	MA 14	KG 0.040



FLAT RING NUTS W/SHORT THREADED NECK

Flat ring nuts with MA14 short threaded neck for use on hand grinders (for rigid discs and cutting discs with 22.2 hole)

CODE	WEIGHT
015 15 070	KG 0.067



IRON SHIMS

Iron shims suitable for use with Bosch or other makes of grinders with a similar attachment, in conjunction with flat ring nuts with short neck.

CODE	FITTING	WEIGHT
015 05 060	MA 14	KG 0.059



FLAT RING NUTS W/LONG THREADED NECK

Flat ring nuts with MA14 long threaded neck for use on hand grinders (cup wheels and merino wool felts).

CODE	FITTING	WEIGHT
015 15 055	MA 14	KG 0.037

**CONE-SHAPED RING NUTS W/SHORT THREADED NECK**

Cone-shaped ring nuts with MA14 short threaded neck for use on grinders (for holding flexible and semi-rigid carbide discs).

CODE	FITTING	WEIGHT
015 15 050	MA 14	KG 0.049

**CONE-SHAPED RING NUTS W/LONG THREADED NECK**

Cone-shaped ring nuts with MA14 long threaded neck, for use on hand grinders (for holding flexible and semi-rigid carbide discs).

CODE	FITTING	WEIGHT
015 15 075	MA 14	KG 0.148

**FLANGES FOR FLAP WHEELS**

Flanges with 14 mm bore for use on hand grinders (for flap wheels)

Antiquing, Brushing & Satin Finishing

- **Multiple- and Single-head Automatic Machines** page 92
- **Single-head Machines** page 95
- **Edge Polishing Machines & Manual Applications** page 97

CODE	TYPE	PCS PER CASE	UNIT WEIGHT
020 25 001	plain	18	KG 0.660
020 25 011	resin coated	18	KG 0.660



SECTOR STYLE 140 MM STEEL WIRE BRUSHES

Sector style brushes, 140 mm in size, with twisted golden steel wire filaments, either plain or resin-coated, designed to remove earth residues and wear away the "softest" parts from granite, in order to improve the adhesion of epoxy systems (resin coating or consolidation systems).

CODE	GRITS	TYPE	PCS PER CASE	UNIT WEIGHT
020 30 050	24	plain	18	KG 0.350
020 30 051	36	plain	18	KG 0.350
020 30 055	46	plain	18	KG 0.350
020 30 060	60	plain	18	KG 0.350
020 30 065	80	plain	18	KG 0.350
020 30 070	120	plain	18	KG 0.350
020 30 075	180	plain	18	KG 0.350
020 30 080	240	plain	18	KG 0.350
020 30 085	320	plain	18	KG 0.350
020 30 090	500	plain	18	KG 0.350
020 30 092	800	plain	18	KG 0.350
020 30 095	1000	plain	18	KG 0.350
020 30 000	24	resin coated	18	KG 0.350
020 30 001	36	resin coated	18	KG 0.350
020 30 005	46	resin coated	18	KG 0.350
020 30 010	60	resin coated	18	KG 0.350
020 30 015	80	resin coated	18	KG 0.350
020 30 020	120	resin coated	18	KG 0.350
020 30 025	180	resin coated	18	KG 0.350
020 30 030	240	resin coated	18	KG 0.350
020 30 035	320	resin coated	18	KG 0.350
020 30 040	500	resin coated	18	KG 0.350
020 30 042	800	resin coated	18	KG 0.350
020 30 045	1000	resin coated	18	KG 0.350



SECTOR STYLE 140 MM SILICON CARBIDE BRUSHES

Sector style brushes with silicon carbide filaments, plain or resin-coated, for creating a brushed finish on granite.

Features:

These brushes can be used after the flaming or sanding step, from grit 24 or 36 on, until the desired degree of finish is achieved. They are also recommended to even out any lines left on a granite surface by the honing process, for a more uniform finish. In some cases, especially in the finer grits, they are used to remove any excess of transparent or coloured liquid enhancers from granite surfaces.

CODE	GRITS	TYPE	PCS PER CASE	UNIT WEIGHT
020 30 100	24	thick	18	KG 0.366
020 30 101	36	thick	18	KG 0.366
020 30 105	46	thick	18	KG 0.366
020 30 110	60	thick	18	KG 0.366
020 30 115	80	thick	18	KG 0.366
020 30 120	120	thick	18	KG 0.366
020 30 125	180	thick	18	KG 0.366
020 30 130	240	thick	18	KG 0.366
020 30 135	320	thick	18	KG 0.366
020 30 140	500	thick	18	KG 0.366
020 30 142	800	thick	18	KG 0.366
020 30 145	1000	thick	18	KG 0.366



SECTOR STYLE 140 MM HIGH DENSITY SILICON CARBIDE BRUSHES

Sector style high-density brushes with plain silicon carbide filaments, ideal for creating a brushed finish on granite.

Features:

These brushes are not available as resin coated because the filaments are packed so closely that they cannot bend too much. Although they are not as aggressive as "multi-tuft brushes", these brushes can be very useful in the intermediate and final processing stage because they last longer and create an excellent finish. They are also recommended to even out any lines left on a granite surface by the honing process, for a more uniform finish.

CODE	GRITS	TYPE	PCS PER CASE	UNIT WEIGHT
020 40 005	24	resin coated	18	KG 0.290
020 40 010	36	resin coated	18	KG 0.290
020 40 015	46	resin coated	18	KG 0.290
020 40 020	60	resin coated	18	KG 0.290
020 40 025	80	resin coated	18	KG 0.290
020 40 030	100	resin coated	18	KG 0.290
020 40 035	120	resin coated	18	KG 0.290
020 40 040	180	resin coated	18	KG 0.290
020 40 045	220	resin coated	18	KG 0.290
020 40 050	240	resin coated	18	KG 0.290
020 40 055	280	resin coated	18	KG 0.290
020 40 060	320	resin coated	18	KG 0.290
020 40 065	500	resin coated	18	KG 0.290
020 40 070	600	resin coated	18	KG 0.290
020 40 075	800	resin coated	18	KG 0.290
020 40 080	1000	resin coated	18	KG 0.290
020 40 085	1800	resin coated	18	KG 0.290



ADRIAFLEX SECTOR STYLE 140 MM DIAMOND BRUSHES

"Adriaflex" resin-coated brushes with diamond wire filaments, ideal for creating a "leather or silk texture" finish on granite. Before using these brushes, you should grind the surface to an 80 or 120 grit finish. After brushing with ADRIAFLEX diamond brushes, preferably use ADRIALAP sectors in the same grit to give the surface a softer textured look and enhance its colour.

CODE	TYPE	PCS PER CASE	UNIT WEIGHT
020 50 005	plain	24	KG 0.322



SECTOR STYLE 140 MM NYLON BRUSHES

Sector style nylon brushes, 140 mm in size, designed to remove any excess chemicals used for the treatment of a granite surface (such as waxes, colour enhancers and the like).

CODE	GRITS	PCS PER CASE	UNIT WEIGHT
001 07 010	60	6	KG 0.205
001 07 015	80	6	KG 0.205
001 07 020	120	6	KG 0.205
001 07 025	180	6	KG 0.205
001 07 030	220	6	KG 0.205
001 07 035	320	6	KG 0.205
001 07 040	400	6	KG 0.205
001 07 045	600	6	KG 0.205
001 07 050	800	6	KG 0.205



ADRIALAP 140 MM SECTORS

"Adrialap" sectors, 140 mm in size, ideal to bring out the colour of a stone surface previously brushed with silicon carbide or Adriaflex diamond brushes. These sectors are also recommended to remove the scratches left on a granite surface by previous abrasive steps.

CODE	GRITS	TYPE
020 73 203	36	plain
020 73 206	46	plain
020 73 309	60	plain
020 73 212	80	plain
020 73 215	120	plain
020 73 218	180	plain
020 73 221	240	plain
020 73 224	320	plain
020 73 227	500	plain
020 73 253	36	resin coated
020 73 256	46	resin coated
020 73 259	60	resin coated
020 73 262	80	resin coated
020 73 265	120	resin coated
020 73 267	180	resin coated
020 73 269	240	resin coated
020 73 271	320	resin coated
020 73 273	500	resin coated



CIRCULAR BRUSHES Ø 130 MM WITH SILICON CARBIDE FILAMENTS & TERZAGO FITTING

Circular brushes 130 mm in diameter, with silicon carbide filaments and Terzago fitting, for creating a brushed finish on granite.

Features:

These brushes can be used after the flaming or sanding step, from grit 24 or 36 on, until the desired degree of finish is achieved. They are also recommended to even out any lines left on a granite surface by the honing process, for a more uniform finish. In some cases, especially in the finer grits, they are used to remove any excess of transparent or coloured liquid enhancers from granite surfaces. They can also be used on natural and agglomerate marble, stone and onyx.

CODE	GRITS	TYPE
020 82 253	36	resin coated
020 82 255	46	resin coated
020 82 257	60	resin coated
020 82 259	80	resin coated
020 82 261	100	resin coated
020 82 263	120	resin coated
020 82 265	180	resin coated
020 82 267	220	resin coated
020 82 269	240	resin coated
020 82 271	280	resin coated
020 82 273	320	resin coated
020 82 275	500	resin coated



ADRIAFLEX DIAMOND WIRE BRUSHES Ø 130 MM WITH TERZAGO FITTING

"Adriaflex" resin-coated diamond wire circular brushes, 130 mm in diameter, with Terzago fitting, designed to create a "leather or silk texture" finish on granite.

Features:

Before using these brushes, you should grind the surface to an 80 or 120 grit finish. After brushing with ADRIAFLEX diamond brushes, preferably use ADRIALAP sectors in the same grit to give the surface a softer textured look and enhance its colour.

CODE	GRITS
001 27 275	120
001 27 280	180
001 27 285	220
001 27 290	320



ADRIALAP DIAMOND CIRCULAR SECTORS Ø 130 MM WITH TERZAGO FITTING

“Adrialap” diamond circular sectors, 130 mm in diameter, with Terzago fitting, ideal for enhancing the colour of surfaces previously brushed with silicon carbide brushes or ADRIAFLEX diamond brushes.

They can also be used to remove any lines left on a granite surface by the honing process.

CODE	GRITS	FITTING	TYPE	UNIT WEIGHT
020 79 003	36	snail lock	plain	KG 1.450
020 79 006	46	snail lock	plain	KG 1.450
020 79 009	60	snail lock	plain	KG 1.450
020 79 012	80	snail lock	plain	KG 1.450
020 79 015	120	snail lock	plain	KG 1.450
020 79 018	180	snail lock	plain	KG 1.450
020 79 021	240	snail lock	plain	KG 1.450
020 79 024	320	snail lock	plain	KG 1.450
020 79 027	500	snail lock	plain	KG 1.450
020 79 103	36	Velcro QRS	plain	KG 1.450
020 79 106	46	Velcro QRS	plain	KG 1.450
020 79 119	60	Velcro QRS	plain	KG 1.450
020 79 112	80	Velcro QRS	plain	KG 1.450
020 79 115	120	Velcro QRS	plain	KG 1.450
020 79 118	180	Velcro QRS	plain	KG 1.450
020 79 121	240	Velcro QRS	plain	KG 1.450
020 79 124	320	Velcro QRS	plain	KG 1.450
020 79 127	500	Velcro QRS	plain	KG 1.450



CIRCULAR BRUSHES Ø 250 MM WITH SILICON CARBIDE FILAMENTS

Circular brushes 250 mm in diameter, with plain silicon carbide filaments, available with snail lock or QRS backing, for creating a brushed finish on granite, after flaming or sanding.

Features:

These brushes can also be used to create a brushed finish on natural marble, agglomerate marble, stone or onyx surfaces previously ground to a 60 grit finish.

CODE	FITTING	TYPE	UNIT WEIGHT
020 65 045	snail lock	resin coated	KG 1.423
020 65 050	MA 14	resin coated	KG 1.423



CIRCULAR STEEL WIRE BRUSHES Ø 100 MM

Circular steel wire brushes, 100 mm in diameter, resin coated, with snail lock design and MA14 thread, for removing earth residues or for cleaning granite.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

ANTIQUING, BRUSHING AND SATIN FINISHING USING AN EDGE-POLISHING MACHINE OR HAND TOOLS

CODE	GRITS	OUTER DIAMETER	FITTING	TYPE	UNIT WEIGHT
020 70 003	36	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 006	46	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 009	60	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 012	80	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 015	120	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 018	180	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 021	240	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 024	320	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 027	500	100 mm	snail lock + MA 14	plain	KG 0.258
020 70 042	36	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 045	46	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 048	60	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 051	80	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 054	120	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 057	180	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 060	240	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 063	320	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 70 066	500	100 mm	snail lock + MA 14	resin coated	KG 0.258
020 73 103	36	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 106	46	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 109	60	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 112	80	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 115	120	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 118	180	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 121	240	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 124	320	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 127	500	130 mm	snail lock + MA 14	plain	KG 0.397
020 73 142	36	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 145	46	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 148	60	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 151	80	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 154	120	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 157	180	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 160	240	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 163	320	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 73 166	500	130 mm	snail lock + MA 14	resin coated	KG 0.397
020 76 103	36	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 106	46	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 109	60	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 112	80	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 115	120	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 118	180	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 121	240	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 124	320	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 127	500	150 mm	snail lock + MA 14	plain	KG 0.493
020 76 142	36	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 145	46	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 148	60	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 151	80	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 154	120	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 157	180	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 160	240	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 163	320	150 mm	snail lock + MA 14	resin coated	KG 0.493
020 76 166	500	150 mm	snail lock + MA 14	resin coated	KG 0.493



SILICON-CARBIDE FILAMENT CIRCULAR BRUSHES WITH SNAIL LOCK + MA14 THREAD

Circular brushes available in 100 mm, 130 mm and 150 mm diameter, with silicon carbide filaments, either plain or resin-coated, with snail lock + MA14 thread, suited for brushing and satin-finishing applications on granite.

Features:

Usually it is sufficient to abrade the surface to a 60-grit finish and then use these brushes starting from 36-grit. Also suitable for natural and agglomerate marble, stone and onyx.

CODE	GRITS	OUTER DIAMETER	FITTING	TYPE	UNIT WEIGHT
020 73 003	36	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 006	46	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 009	60	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 012	80	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 015	120	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 018	180	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 021	240	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 024	320	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 027	500	130 mm	snail lock 35 mm hole	plain	KG 0.359
020 73 042	36	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 045	46	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 048	60	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 051	80	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 054	120	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 057	180	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 060	240	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 063	320	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 73 066	500	130 mm	snail lock 35 mm hole	resin coated	KG 0.359
020 76 003	36	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 006	46	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 009	60	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 012	80	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 015	120	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 018	180	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 021	240	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 024	320	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 027	500	150 mm	snail lock 35 mm hole	plain	KG 0.486
020 76 042	36	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 045	46	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 048	60	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 051	80	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 054	120	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 057	180	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 060	240	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 063	320	150 mm	snail lock 35 mm hole	resin coated	KG 0.486
020 76 066	500	150 mm	snail lock 35 mm hole	resin coated	KG 0.486

CODE	GRITS	OUTER DIAMETER	TYPE	TYPE	UNIT WEIGHT
020 73 303	36	130 mm	22.2 mm hole	plain	KG 0.311
020 73 306	46	130 mm	22.2 mm hole	plain	KG 0.311
020 73 309	60	130 mm	22.2 mm hole	plain	KG 0.311
020 73 312	80	130 mm	22.2 mm hole	plain	KG 0.311
020 73 315	120	130 mm	22.2 mm hole	plain	KG 0.311
020 73 318	180	130 mm	22.2 mm hole	plain	KG 0.311
020 73 321	240	130 mm	22.2 mm hole	plain	KG 0.311
020 73 324	320	130 mm	22.2 mm hole	plain	KG 0.311
020 73 327	500	130 mm	22.2 mm hole	plain	KG 0.311



SILICON-CARBIDE FILAMENT CIRCULAR BRUSHES WITH SNAIL LOCK DESIGN

Circular brushes available in 130 mm and 150 mm diameter, with silicon carbide filaments, either plain or resin-coated, suited for brushing and satin-finishing applications on granite.

Features:

Usually it is sufficient to abrade the surface to a 60-grit finish and then use these brushes starting from 36-grit. Also suitable for natural and agglomerate marble, stone and onyx.



CIRCULAR BRUSHES Ø 130 MM WITH SILICON CARBIDE FILAMENTS, 22.2 MM HOLE

Circular brushes 130 mm in diameter, plain style, with 22.2 mm hole, suited for brushing and satin-finishing applications on granite.

Features:

Usually it is sufficient to abrade the surface to a 60-grit finish and then use these brushes starting from 36-grit. Also suitable for natural and agglomerate marble, stone and onyx.

ANTIQUING, BRUSHING AND SATIN FINISHING USING AN EDGE-POLISHING MACHINE OR HAND TOOLS

CODE	GRITS	OUTER DIAMETER	FITTING	TYPE	UNIT WEIGHT
020 82 001	24	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 003	36	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 006	46	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 009	60	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 012	80	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 015	100	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 018	120	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 021	180	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 024	220	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 027	240	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 030	280	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 033	320	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 036	500	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 037	600	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 039	800	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 042	1000	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 045	1800	100 mm	snail lock + MA 14	resin coated	KG 0.264
020 82 201	24	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 203	36	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 206	46	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 209	60	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 212	80	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 215	100	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 218	120	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 221	180	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 224	220	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 227	240	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 230	280	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 233	320	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 236	500	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 237	600	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 239	800	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 241	1000	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 245	1800	130 mm	snail lock + MA 14	resin coated	KG 0.406
020 82 501	24	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 503	36	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 506	46	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 509	60	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 512	80	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 515	100	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 518	120	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 521	180	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 524	220	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 527	240	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 530	280	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 533	320	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 536	500	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 537	600	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 539	800	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 542	1000	150 mm	snail lock + MA 14	resin coated	KG 0.596
020 82 545	1800	150 mm	snail lock + MA 14	resin coated	KG 0.596



ADRIAFLEX DIAMOND WIRE CIRCULAR BRUSHES WITH SNAIL LOCK + MA14 THREAD

Adriaflex diamond wire circular brushes, available in 100 mm, 130 mm and 150 mm diameter, resin coated, with snail lock + MA14 thread, designed to create a "leather or silk texture" finish on granite.

CODE	GRITS	OUTER DIAMETER	UNIT WEIGHT
001 53 215	120	130 mm	KG 0.310
001 53 225	220	130 mm	KG 0.310
001 53 230	320	130 mm	KG 0.310
001 53 235	400	130 mm	KG 0.310
001 53 245	600	130 mm	KG 0.310
001 53 430	120	150 mm	KG 0.310
001 53 440	220	150 mm	KG 0.310
001 53 445	320	150 mm	KG 0.310
001 53 450	400	150 mm	KG 0.310
001 53 460	600	150 mm	KG 0.310



ADRIALAP DIAMOND WHEELS

"Adrialap" snail lock diamond wheels, available in 130 mm and 150 mm diameter, designed to enhance the colour of granite edges previously treated with silicon carbide or Adriaflex diamond brushes. They are can also be used to remove any lines left on a granite edge by the honing process.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

Gluing

- **Mastics for Gluing** **page 104**
- **Colouring Pastes, Oxides & Silicones** **page 107**

CODE	COLOUR	PACKAGING	PACKS
030 20 005	beige	L 0.750	12 pcs
030 20 010	beige	L 1	12 pcs
030 20 015	beige	L 4	4 pcs
030 20 020	white	L 0.750	12 pcs
030 20 025	white	L 1	12 pcs
030 20 027	white	L 4	4 pcs
030 20 030	black	L 0.750	12 pcs
030 20 035	black	L 1	12 pcs
030 20 040	black	L 4	4 pcs

EPOMIX COLOURED SOLID MASTIC

"Epomix" coloured solid mastic used for gluing granite, available in a variety of packages. This two-component, fast setting and curing product ensures extremely high adhesion thanks to the use of top-quality precious resins.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

CODE	COLOUR	PACKAGING	PACKS
030 20 045	transparent	L 0.750	12 pcs
030 20 050	transparent	L 1	12 pcs
030 20 055	transparent	L 4	4 pcs

EPOMIX TRANSPARENT SOLID MASTIC

"Epomix" transparent solid mastic used for gluing granite, available in a variety of packages. This two-component, fast setting and curing product ensures extremely high adhesion thanks to the use of top-quality precious resins.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

CODE	COLOUR	PACKAGING: RESIN (A) + HARDENER (B)	UNIT WEIGHT
030 45 003	transparent	100p.p. resin/50p.p hardener	KG 1.5

TRANSPARENT LIQUID EPOXY MASTIC FOR GLUING APPLICATIONS

Epoxy based transparent liquid mastics in two parts (2:1 mix ratio) available in 1.5 Kg pack, used for gluing granite. Thanks to their excellent adhesive power, they do not shrink after setting and are also recommended for exterior use.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

SOLID EPOXY MASTIC FOR GLUING

CODE	COLOUR	PACKAGING RESIN (A) + HARDENER (B)	UNIT WEIGHT
030 45 005	transparent	100 p.p. resin/50 p.p. hardener	KG 1.5
030 45 065	transparent	100 p.p. resin/50 p.p. hardener	KG 2.25
030 45 010	straw yellow	100 p.p. resin/50 p.p. hardener	KG 1.5
030 45 045	beige AK	100 p.p. resin/50 p.p. hardener	KG 3
030 45 070	grey AK	100 p.p. resin/50 p.p. hardener	KG 3.75
030 45 015	straw yellow	100 p.p. resin/100 p.p. hardener	KG 3

TRANSPARENT AND COLOURED SOLID EPOXY MASTIC FOR GLUING APPLICATIONS

Two-component solid Epoxy mastics, available in a variety of packages, used for gluing granite. Thanks to their excellent adhesive power, they do not shrink after setting and are also recommended for exterior use.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

SEMI-SOLID EPOXY MASTIC IN A CARTRIDGE, FOR GLUING

CODE	COLOUR	PACKAGING
030 45 020	transparent	ml 50
030 20 025	beige	ml 50

SEMI-SOLID EPOXY MASTIC IN A CARTRIDGE

Two-component semi-solid Epoxy mastic, available in a 50 ml cartridge, used for gluing granite. This product is very easy to use as the two parts are accurately metered and mixed directly in the mixer and there is no need to weigh the two components.

Thanks to its excellent adhesive power, it does not shrink after setting and is also recommended for exterior use.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

CODE	TYPE
030 45 030	straight nozzle
030 45 035	bent nozzle
030 45 040	gun

ACCESSORIES FOR SEMI-SOLID EPOXY MASTIC IN A CARTRIDGE

COLOURING PASTES

CODE	COLOUR	TYPE	PACKAGING
030 65 085	white	solvent based	ml 30
030 65 090	blue	solvent based	ml 30
030 65 095	brown	solvent based	ml 30
030 65 100	black	solvent based	ml 30
030 65 105	ochre	solvent based	ml 30
030 65 110	red	solvent based	ml 30
030 65 115	rust	solvent based	ml 30
030 65 120	green	solvent based	ml 30
030 65 125	set 8 assorted colours	solvent based	ml 30 x 8

COLOURING PASTES FOR EPOXY MASTICS

Solvent based colouring pastes for colouring epoxy mastics.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

COLOURING OXIDES

CODE	COLOUR	PACKAGING
030 70 001	white	KG 1
030 70 005	white	KG 5
030 70 010	white	KG 25
030 70 015	blue	KG 1
030 70 020	yellow	KG 1
030 70 025	yellow	KG 5
030 70 030	yellow	KG 25
030 70 035	brown	KG 1
030 70 040	brown	KG 5
030 70 045	brown	KG 25
030 70 050	black	KG 1
030 70 055	black	KG 5
030 70 060	black	KG 25
030 70 065	red	KG 1
030 70 070	red	KG 5
030 70 075	red	KG 25
030 70 080	green	KG 1
030 70 085	green	KG 5

COLOURING OXIDE POWDERS FOR POLYESTER AND EPOXY MASTICS

Colouring oxides in powder form for polyester and epoxy mastics, available in a variety of packages.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

NEUTRAL SILICONE SEALANTS

CODE	COLOUR	TYPE	PCS PER CASE
080 50 905	transparent	solvent based	24 pcs
080 50 905	white	solvent based	24 pcs
080 50 905	jasmin	solvent based	24 pcs
080 50 905	grey	solvent based	24 pcs
080 50 905	beige	solvent based	24 pcs
080 50 905	anthracite	solvent based	24 pcs
080 50 905	manhattan	solvent based	24 pcs
080 50 905	dark brown	solvent based	24 pcs

KEDISIL N310

Low-module, neutral cross-linking silicone sealant for professional use, transparent or coloured, available in a 310 ml tube. This sealant is suitable for sealing low porosity granite.

Features:

Also suitable for use on low-porosity natural marble, agglomerate marble, stone and onyx, as well as ceramic and cement surfaces, wood, metal, glass and refractory materials.

CODE	COLOUR	PCS PER CASE
030 95 053	manhattan glossy	20 pcs
030 95 055	night-grey	20 pcs
030 95 057	anthracite-grey	20 pcs
030 95 059	anthracite	20 pcs
030 95 061	bahama beige	20 pcs
030 95 063	beige	20 pcs
030 95 065	white	20 pcs
030 95 067	brown	20 pcs
030 95 069	jasmin	20 pcs
030 95 071	matt-manhattan	20 pcs
030 95 073	black	20 pcs
030 95 075	red beige	20 pcs
030 95 077	transparent	20 pcs
030 95 079	chinchilla	20 pcs
030 95 081	sandstone-beige	20 pcs
030 95 083	grigio luce	20 pcs
030 95 085	sunset	20 pcs
030 95 087	sand-red	20 pcs

PLUS NEUTRAL SILICONE

Low-module, neutral cross-linking silicone sealant for professional use, transparent or coloured, available in a 310 ml tube. This sealant is suitable for sealing all types of granite.

Features:

Also suitable for use on natural marble, agglomerate marble, stone and onyx, as well as ceramic and cement surfaces, wood, metal, glass and refractory materials.

Epoxy Systems for Net Reinforcing & Resin Treating

- **Epoxy Resins** **page 110**
- **Epoxy Hardeners** **page 114**
- **Release Agents & Colouring Pastes** **page 118**



ADRIAPOX TRANSPARENT EPOXY RESINS

“ADRIAPOX” transparent epoxy resins, formulated in a wide range of solutions to suit all types of applications:

DESCRIPTION
ADRIAPOX “SPECIAL” is a low viscosity resin displaying excellent adhesion properties. It is excellent for the resin treatment and net reinforcement of marble and granite surfaces with veins and thin cracks. It is antiallergenic and low odour and exhibits good UV resistance. It can be used in conjunction with any of the “ADRIA” line of hardeners.
ADRIAPOX 1200 is a low viscosity resin displaying excellent adhesion properties. It is excellent for the resin treatment and net reinforcement of marble and granite surfaces with thin and micro cracks. It can be used in conjunction with any of the “ADRIA” line of hardeners.
ADRIAPOX 1000 is a very low viscosity resin displaying excellent adhesion properties. It is excellent for the resin treatment and net reinforcement of marble and granite surfaces with veins and micro cracks. It provides an ideal balance between quality and cost. It can be used in conjunction with any of the “ADRIA” line of hardeners.
ADRIAPOX 2000 is a medium to low viscosity resin displaying good adhesion properties. Being a less liquid resin, it is especially recommended for net-reinforcing applications on marble and granite surfaces with thin to medium width cracks. It is a low odour product. It can be used in conjunction with any of the “ADRIA” line of hardeners.
ADRIAPOX 1600 is a low viscosity resin displaying reasonable adhesion properties. It can be used to strengthen marble surfaces. For fibreglass netting applications, it can be used on marble surfaces but not on onyx. It is antiallergenic and low odour and exhibits excellent UV resistance. It can be used in conjunction with any of the “ADRIA” line of hardeners. (For more information, please contact our technical staff)
ADRIAPOX 4000 is a medium viscosity resin that can be used exclusively for fibreglass netting applications on marble and granite. This product is very low odour and offers good adhesion properties. It is recommended to repair badly damaged surfaces. It can be used in conjunction with any of the “ADRIA” line of hardeners.
ADRIAPOX 7000 is a high viscosity resin designed to treat marble and granite where no colour change is required. It is antiallergenic and low odour. This resin is formulated to be particularly reactive and is normally used in conjunction with fast hardeners.
ADRIAPOX 20000 is a high viscosity resin that can be used to reconstruct badly damaged marble and granite surfaces, including by mixing it with chips of the same material that is being repaired. It can also be used for gluing. It is antiallergenic and low odour and has a good UV resistance. It can be used in conjunction with only some of the “ADRIA” hardeners. (For more information, please contact our technical staff)
ADRIAPOX GEL is a very high viscosity resin to be used solely to fill large holes in marble and granite, with no need to clean up the holes prior to filling them. It is antiallergenic and low odour and has a good UV resistance. It can be used in conjunction with only some of the “ADRIA” hardeners. (For more information, please contact our technical staff)

N.B Epoxy systems must be applied to perfectly clean and dry surfaces only.

CODE	TYPE	COLOUR	PACKAGING
030 55 099	EPOXY RESIN ADRIAPOX SPECIAL	transparent	Kg 1
030 55 103	EPOXY RESIN ADRIAPOX SPECIAL	transparent	Kg 5
030 55 097	EPOXY RESIN ADRIAPOX SPECIAL	transparent	Kg 20
030 55 098	EPOXY RESIN ADRIAPOX SPECIAL	transparent	Kg 200
030 55 099	EPOXY RESIN ADRIAPOX SPECIAL	transparent	Kg 1000
030 55 080	EPOXY RESIN ADRIAPOX 1200	transparent	Kg 1
030 55 083	EPOXY RESIN ADRIAPOX 1200	transparent	Kg 5
030 55 085	EPOXY RESIN ADRIAPOX 1200	transparent	Kg 20
030 55 090	EPOXY RESIN ADRIAPOX 1200	transparent	Kg 200
030 55 095	EPOXY RESIN ADRIAPOX 1200	transparent	Kg 1000
030 55 001	EPOXY RESIN ADRIAPOX 1000	transparent	Kg 1
030 55 002	EPOXY RESIN ADRIAPOX 1000	transparent	Kg 5
030 55 005	EPOXY RESIN ADRIAPOX 1000	transparent	Kg 20
030 55 010	EPOXY RESIN ADRIAPOX 1000	transparent	Kg 200
030 55 015	EPOXY RESIN ADRIAPOX 1000	transparent	Kg 1000
030 55 195	EPOXY RESIN ADRIAPOX 2000	transparent	Kg 1
030 55 197	EPOXY RESIN ADRIAPOX 2000	transparent	Kg 5
030 55 200	EPOXY RESIN ADRIAPOX 2000	transparent	Kg 20
030 55 205	EPOXY RESIN ADRIAPOX 2000	transparent	Kg 200
030 55 210	EPOXY RESIN ADRIAPOX 2000	transparent	Kg 1000
030 55 175	EPOXY RESIN ADRIAPOX 1600	transparent	Kg 1
030 55 177	EPOXY RESIN ADRIAPOX 1600	transparent	Kg 5
030 55 180	EPOXY RESIN ADRIAPOX 1600	transparent	Kg 20
030 55 185	EPOXY RESIN ADRIAPOX 1600	transparent	Kg 200
030 55 190	EPOXY RESIN ADRIAPOX 1600	transparent	Kg 1000
030 55 413	EPOXY RESIN ADRIAPOX 4000	transparent	Kg 20
030 55 416	EPOXY RESIN ADRIAPOX 4000	transparent	Kg 200
030 55 419	EPOXY RESIN ADRIAPOX 4000	transparent	Kg 1000
030 55 551	EPOXY RESIN ADRIAPOX 7000	transparent	Kg 1
030 55 513	EPOXY RESIN ADRIAPOX 7000	transparent	Kg 5
030 55 515	EPOXY RESIN ADRIAPOX 7000	transparent	Kg 20
030 55 518	EPOXY RESIN ADRIAPOX 7000	transparent	Kg 200
030 55 521	EPOXY RESIN ADRIAPOX 7000	transparent	Kg 1000
030 55 150	EPOXY RESIN ADRIAPOX 20000	transparent	transp Kg 4
030 55 153	EPOXY RESIN ADRIAPOX 20000	transparent	transp Kg 20
030 55 279	EPOXY RESIN ADRIAPOX GEL	transparent	Kg 20



ADRIAPOX COLOURED EPOXY RESINS

ADRIAPOX available in the following colours: white, beige and black, formulated in a wide range of solutions to suit all types of applications:

DESCRIPTION
ADRIAPOX 1000 is a very low viscosity resin displaying excellent adhesion properties. It is excellent for the resin treatment and net reinforcement of marble and granite surfaces with veins and micro cracks. It provides an ideal balance between quality and cost. It can be used in conjunction with any of the "ADRIA" line of hardeners.
ADRIAPOX 2000 is a medium to low viscosity resin displaying good adhesion properties. Being a less liquid resin, it is especially recommended for net-reinforcing applications on marble and granite surfaces with thin to medium width cracks. It can be used in conjunction with any of the "ADRIA" line of hardeners.
ADRIAPOX 1600 is a low viscosity resin displaying reasonable adhesion properties. It can be used to strengthen marble surfaces. For fibreglass netting applications, it can be used on marble surfaces but not on onyx. It is antiallergenic and low odour and exhibits excellent UV resistance. It can be used in conjunction with any of the "ADRIA" line of hardeners. (For more information, please contact our technical staff)

N.B Epoxy systems must be applied to perfectly clean and dry surfaces only.

ADRIAPOX TRANSPARENT EPOXY RESINS

CODE	TYPE	COLOUR	PACKAGING
030 55 035	EPOXY RESIN ADRIAPOX 1000	Light beige	Kg 20
030 55 040	EPOXY RESIN ADRIAPOX 1000	Light beige	Kg 200
030 55 045	EPOXY RESIN ADRIAPOX 1000	Light beige	Kg 1000
030 55 020	EPOXY RESIN ADRIAPOX 1000	Beige	Kg 20
030 55 025	EPOXY RESIN ADRIAPOX 1000	Beige	Kg 200
030 55 030	EPOXY RESIN ADRIAPOX 1000	Beige	Kg 1000
030 55 053	EPOXY RESIN ADRIAPOX 1000	White	Kg 20
030 55 055	EPOXY RESIN ADRIAPOX 1000	White	Kg 200
030 55 057	EPOXY RESIN ADRIAPOX 1000	White	Kg 1000
030 55 047	EPOXY RESIN ADRIAPOX 1000	Black	Kg 20
030 55 049	EPOXY RESIN ADRIAPOX 1000	Black	Kg 200
030 55 051	EPOXY RESIN ADRIAPOX 1000	Black	Kg 1000
030 55 230	EPOXY RESIN ADRIAPOX 2000	Light beige	Kg 20
030 55 235	EPOXY RESIN ADRIAPOX 2000	Light beige	Kg 200
030 55 240	EPOXY RESIN ADRIAPOX 2000	Light beige	Kg 1000
030 55 218	EPOXY RESIN ADRIAPOX 2000	Beige	Kg 20
030 55 220	EPOXY RESIN ADRIAPOX 2000	Beige	Kg 200
030 55 225	EPOXY RESIN ADRIAPOX 2000	Beige	Kg 1000
030 55 161	EPOXY RESIN ADRIAPOX 1600	Light beige	Kg 20
030 55 163	EPOXY RESIN ADRIAPOX 1600	Light beige	Kg 200
030 55 165	EPOXY RESIN ADRIAPOX 1600	Light beige	Kg 1000
030 55 155	EPOXY RESIN ADRIAPOX 1600	Beige	Kg 20
030 55 157	EPOXY RESIN ADRIAPOX 1600	Beige	Kg 200
030 55 159	EPOXY RESIN ADRIAPOX 1600	Beige	Kg 1000

EPOXY HARDENERS

Epoxy hardeners available in a wide choice of mixing ratios, to suit all types of applications:

DESCRIPTION
B 25 is a highly reactive, low to medium viscosity hardener, ideal for the resin treatment and net reinforcement of marble and granite. This hardener exhibits good mechanical properties. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:25.
E 25 is a medium to highly reactive hardener with low viscosity, excellent for the resin treatment and net reinforcement of marble and granite. This hardener exhibits good mechanical properties. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:25.
H 25 is a medium reactivity, low viscosity catalyst, excellent for the resin treatment and net reinforcement of marble and granite. This hardener exhibits good mechanical properties as well as colour clarity. It is a low odour product. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:25.
I 25 is a highly reactive, medium to low viscosity catalyst, ideal for the resin treatment and net reinforcement of marble and granite. It is formulated specifically for applications where darkening of the material is not required. This hardener exhibits good mechanical properties. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:25.
B 30/3 is a highly reactive, very low viscosity hardener, ideal for the resin treatment and net reinforcement of marble and granite. This hardener exhibits excellent mechanical properties. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:30.
C 30/3 E is a slow reactivity, very low viscosity hardener, ideal for the resin treatment and net reinforcement of marble and granite. This hardener exhibits good mechanical properties. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:30.
H 30 is a medium reactivity, very low viscosity hardener, excellent for the resin treatment and net reinforcement of marble and granite. This hardener exhibits excellent mechanical properties as well as good colour clarity. It is a low odour product. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:30.
I 30 is a medium to slow reactivity hardener with very low viscosity, excellent for the resin treatment and net reinforcement of marble and granite. This hardener exhibits excellent mechanical properties as well as good colour clarity. It is a low odour product. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:30.
A 33 is a very slow reactivity, moderately exothermic, very low viscosity hardener. It is used solely for the resin treatment of marble and granite. This hardener exhibits excellent mechanical properties as well as pure colour quality. It ensures excellent penetration and is ideal for use when a strong darkening of the material is required. It is a low odour product. Once applied it must be oven cured. Resin-to-hardener ratio 100:33.

N.B Epoxy systems must be applied to perfectly clean and dry surfaces only.

EPOXY HARDENERS

CODE	TYPE	PERCENTAGE	PACKAGING
030 60 034	EPOXY HARDENER B/25	25%	Kg 0.250
030 60 040	EPOXY HARDENER B/25	25%	Kg 1
030 60 045	EPOXY HARDENER B/25	25%	Kg 5
030 60 048	EPOXY HARDENER B/25	25%	Kg 20
030 60 055	EPOXY HARDENER B/25	25%	Kg 200
030 60 065	EPOXY HARDENER B/25	25%	Kg 1000
030 60 113	EPOXY HARDENER E/25	25%	Kg 0.250
030 60 115	EPOXY HARDENER E/25	25%	Kg 1
030 60 120	EPOXY HARDENER E/25	25%	Kg 5
030 60 124	EPOXY HARDENER E/25	25%	Kg 20
030 60 130	EPOXY HARDENER E/25	25%	Kg 200
030 60 140	EPOXY HARDENER E/25	25%	Kg 1000
030 60 181	EPOXY HARDENER H/25	25%	Kg 0.250
030 60 182	EPOXY HARDENER H/25	25%	Kg 1
030 60 183	EPOXY HARDENER H/25	25%	Kg 5
030 60 185	EPOXY HARDENER H/25	25%	Kg 20
030 60 186	EPOXY HARDENER H/25	25%	Kg 200
030 60 189	EPOXY HARDENER H/25	25%	Kg 1000
030 60 550	EPOXY HARDENER I/25	25%	Kg 0.250
030 60 552	EPOXY HARDENER I/25	25%	Kg 1
030 60 554	EPOXY HARDENER I/25	25%	Kg 5
030 60 556	EPOXY HARDENER I/25	25%	Kg 20
030 60 559	EPOXY HARDENER I/25	25%	Kg 200
030 60 562	EPOXY HARDENER I/25	25%	Kg 1000
030 60 193	EPOXY HARDENER B/30-3	30%	Kg 0.300
030 60 195	EPOXY HARDENER B/30-3	30%	Kg 1
030 60 200	EPOXY HARDENER B/30-3	30%	Kg 5
030 60 204	EPOXY HARDENER B/30-3	30%	Kg 20
030 60 210	EPOXY HARDENER B/30-3	30%	Kg 200
030 60 220	EPOXY HARDENER B/30-3	30%	Kg 1000
030 60 223	EPOXY HARDENER C/30 E	30%	Kg 0.300
030 60 224	EPOXY HARDENER C/30 E	30%	Kg 1
030 60 226	EPOXY HARDENER C/30 E	30%	Kg 5
030 60 227	EPOXY HARDENER C/30 E	30%	Kg 20
030 60 229	EPOXY HARDENER C/30 E	30%	Kg 200
030 60 570	EPOXY HARDENER H/30	30%	Kg 0.300
030 60 572	EPOXY HARDENER H/30	30%	Kg 1
030 60 574	EPOXY HARDENER H/30	30%	Kg 5
030 60 577	EPOXY HARDENER H/30	30%	Kg 20
030 60 580	EPOXY HARDENER H/30	30%	Kg 200
030 60 583	EPOXY HARDENER H/30	30%	Kg 1000
030 60 588	EPOXY HARDENER I/30	30%	Kg 0.300
030 60 590	EPOXY HARDENER I/30	30%	Kg 1
030 60 593	EPOXY HARDENER I/30	30%	Kg 5
030 60 596	EPOXY HARDENER I/30	30%	Kg 20
030 60 599	EPOXY HARDENER I/30	30%	Kg 200
030 60 603	EPOXY HARDENER I/30	30%	Kg 1000
030 60 232	EPOXY HARDENER A/33	33%	Kg 0.330
030 60 231	EPOXY HARDENER A/33	33%	Kg 1
030 60 235	EPOXY HARDENER A/33	33%	Kg 5
030 60 238	EPOXY HARDENER A/33	33%	Kg 20
030 60 245	EPOXY HARDENER A/33	33%	Kg 200
030 60 300	EPOXY HARDENER A/33	33%	Kg 1000



EPOXY HARDENERS

Epoxy hardeners available in a wide choice of mixing ratios, to suit all types of applications:

DESCRIPTION
C 34 is a slowly reactive, very low viscosity hardener, excellent for the resin treatment of marble and granite. This hardener exhibits excellent mechanical properties as well as very good colour clarity. It is a low odour product. Once applied it must be oven cured. Resin-to-hardener ratio 100:34.
B 35 is a slowly reactive, very low viscosity hardener, excellent for the resin treatment of marble and granite. This hardener exhibits excellent mechanical properties as well as very good colour clarity. It is a low odour product. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:35.
A 37/2 is a medium reactivity, very low viscosity hardener, excellent for the resin treatment of marble and granite. This hardener exhibits excellent mechanical properties as well as pure colour quality. It is a low odour product. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:37.
B 50 is a medium reactivity, low viscosity hardener, excellent for the resin treatment of marble and granite. It exhibits excellent mechanical properties and is recommended for bonding applications. It is a low odour product. Although oven curing is best, this hardener provides good curing results also at room temperature. Resin-to-hardener ratio 100:50.

N.B Epoxy systems must be applied to perfectly clean and dry surfaces only.

EPOXY HARDENERS

CODE	TYPE	PERCENTAGE	PACKAGING
030 60 301	EPOXY HARDENER C/34	34%	Kg 0.340
030 60 302	EPOXY HARDENER C/34	34%	Kg 1
030 60 303	EPOXY HARDENER C/34	34%	Kg 5
030 60 306	EPOXY HARDENER C/34	34%	Kg 20
030 60 308	EPOXY HARDENER C/34	34%	Kg 200
030 60 309	EPOXY HARDENER C/34	34%	Kg 1000
030 60 314	EPOXY HARDENER B/35	35%	Kg 0.350
030 60 315	EPOXY HARDENER B/35	35%	Kg 1
030 60 320	EPOXY HARDENER B/35	35%	Kg 5
030 60 324	EPOXY HARDENER B/35	35%	Kg 20
030 60 330	EPOXY HARDENER B/35	35%	Kg 200
030 60 340	EPOXY HARDENER B/35	35%	Kg 1000
030 60 025	EPOXY HARDENER A/37/2	37%	Kg 0.370
030 60 027	EPOXY HARDENER A/37/2	37%	Kg 1
030 60 028	EPOXY HARDENER A/37/2	37%	Kg 5
030 60 031	EPOXY HARDENER A/37/2	37%	Kg 20
030 60 032	EPOXY HARDENER A/37/2	37%	Kg 200
030 60 033	EPOXY HARDENER A/37/2	37%	Kg 1000
030 60 550	EPOXY HARDENER B/50	50%	Kg 0.500
030 60 552	EPOXY HARDENER B/50	50%	Kg 1
030 60 554	EPOXY HARDENER B/50	50%	Kg 5
030 60 556	EPOXY HARDENER B/50	50%	Kg 20
030 60 559	EPOXY HARDENER B/50	50%	Kg 200
030 60 562	EPOXY HARDENER B/50	50%	Kg 1000

RELEASE AGENTS FOR EPOXY SYSTEMS

CODE	PACKAGING
030 55 992	Kg 1
030 55 993	Kg 5
030 55 995	Kg 20

EPODIST

Release agent, ideal for preventing bonding of the epoxy system to the machine or bench during processing.

COLOURING PASTES FOR EPOXY RESINS

CODE	COLOUR	PACKAGING
030 65 085	white	ml 30
030 65 090	blue	ml 30
030 65 095	brown	ml 30
030 65 100	black	ml 30
030 65 105	ochre	ml 30
030 65 110	red	ml 30
030 65 115	rust	ml 30
030 65 120	green	ml 30
030 65 125	assorted colours	ml 30 x 8

COLOURING PASTES FOR EPOXY RESINS

Solvent base colouring pastes for colouring epoxy resins.

Strengthening & Consolidating Systems

- Consolidating Systems for Blocks
- Strengthening Systems

page 120

page 122

CODE	TYPE	PACKAGING
030 50 105	tix 2000	Kg 20
030 50 115	tix 2000	Kg 180
030 50 125	tix 2000 plus	Kg 20

“TIX 2000” EPOXY MASTIC FOR IMPREGNATING WOVEN ROVINGS

Viscous epoxy mastic formulated for impregnating the reinforcement woven roving for use on stone blocks, available in a variety of packages.

Features:

The PLUS line is a more viscous product. Also suitable for natural and agglomerate marble, stone and onyx.

CODE	TYPE	PACKAGING
030 50 205	block 25	Kg 20
030 50 215	block 30	Kg 20

“BLOCK” EPOXY HARDENER FOR IMPREGNATING WOVEN ROVINGS

Low viscosity epoxy hardener used for impregnating the reinforcement woven roving for use on stone blocks. To suit all applications and ambient conditions, it comes in two options: Block 25 for 10°C to 25°C and Block 30 for 25°C to 35°C.

Features:

Formulated for use in conjunction with TIX 2000 epoxy mastic. Also suitable for natural and agglomerate marble, stone and onyx.

CODE	PACKAGING
030 50 001	Kg 18

CONSOLIDANT EPOXY MASTIC

Consolidant epoxy mastic to be used on stone blocks as an additional strengthening agent, after the first stage: TIX 2000 mastic + BLOCK 25 or 30 hardener.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

CONSOLIDATING SYSTEMS FOR BLOCKS

CODE	TYPE	PACKAGING
030 50 225	block C 8.5	Kg 20
030 50 235	block C 10	Kg 20

"BLOCK C" EPOXY CONSOLIDANT HARDENER

Low viscosity epoxy consolidant hardener for use in conjunction with consolidant epoxy mastic. To suit all types of applications and ambient conditions, it is available in two options: BLOCK C 8.5 for 10°C to 25°C and BLOCK C 10 for 25°C to 35°C .

Features:

The amount of hardener to be added to an 18 Kg tin of consolidant epoxy mastic is the following: BLOCK C 8.5 Kg 1.5, and BLOCK C 10 Kg 1.8

Also suitable for natural and agglomerate marble, stone and onyx.

CODE	PACKAGING
030 50 145	1 pc



IMPREGNATING ROLLER

CODE	SIZE	PACKAGING
080 70 031	28 x 12 cm	1 pc




FLAT TROWEL

Flat trowel 28 x 12

STRENGTHENING SYSTEMS

CODE	HEIGHT	PACKAGING	PCS PER CASE	PALLET SIZE
030 75 104	70 cm	300 metre rolls	9 rolls upright	100 x 120 x 100
030 75 106	80 cm	300 metre rolls	9 rolls upright	110 x 120 x 100
030 75 108	90 cm	300 metre rolls	9 rolls upright	120 x 120 x 100
030 75 110	100 cm	300 metre rolls	9 rolls upright	130 x 120 x 100
030 75 112	110 cm	300 metre rolls	9 rolls upright	140 x 120 x 100
030 75 114	120 cm	300 metre rolls	9 rolls upright	150 x 120 x 100
030 75 116	130 cm	300 metre rolls	9 rolls upright	160 x 120 x 100
030 75 118	140 cm	300 metre rolls	9 rolls upright	170 x 120 x 100
030 75 120	150 cm	300 metre rolls	9 rolls upright	180 x 120 x 100
030 75 122	160 cm	300 metre rolls	9 rolls upright	190 x 120 x 100
030 75 124	170 cm	300 metre rolls	9 rolls upright	200 x 120 x 100
030 75 126	180 cm	300 metre rolls	9 rolls upright	210 x 120 x 100
030 75 128	190 cm	300 metre rolls	9 rolls upright	230 x 120 x 100
030 75 130	200 cm	300 metre rolls	9 rolls upright	230 x 120 x 100

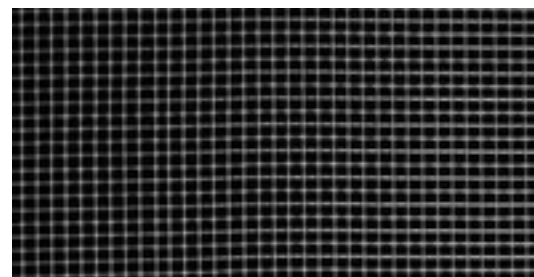

FIBREGLASS CLOTH 78 GR/SQM

Fibreglass cloth for slab reinforcement, 78 grams/sqm, all purpose. Available in a variety of heights, from 70 cm up to 200 cm.

Features:

An excellent surface treatment results in excellent impregnation (wettability) of this fibreglass cloth, with epoxy as well as polyester systems. Also suitable for natural and agglomerate marble, stone and onyx.

CODE	HEIGHT	PACKAGING	PCS PER CASE	PALLET SIZE
030 75 204	70 cm	300 metre rolls	12 rolls upright	100 x 120 x 100
030 75 206	80 cm	300 metre rolls	12 rolls upright	110 x 120 x 100
030 75 208	90 cm	300 metre rolls	12 rolls upright	120 x 120 x 100
030 75 210	100 cm	300 metre rolls	12 rolls upright	130 x 120 x 100
030 75 212	110 cm	300 metre rolls	12 rolls upright	140 x 120 x 100
030 75 214	120 cm	300 metre rolls	12 rolls upright	150 x 120 x 100
030 75 216	130 cm	300 metre rolls	12 rolls upright	160 x 120 x 100
030 75 218	140 cm	300 metre rolls	12 rolls upright	170 x 120 x 100
030 75 220	150 cm	300 metre rolls	12 rolls upright	180 x 120 x 100
030 75 222	160 cm	300 metre rolls	12 rolls upright	190 x 120 x 100
030 75 224	170 cm	300 metre rolls	12 rolls upright	200 x 120 x 100
030 75 226	180 cm	300 metre rolls	12 rolls upright	210 x 120 x 100
030 75 228	190 cm	300 metre rolls	12 rolls upright	230 x 120 x 100
030 75 230	200 cm	300 metre rolls	12 rolls upright	230 x 120 x 100



FIBREGLASS CLOTH 55 GR/SMQ

Fibreglass cloth for slab reinforcement, 55 grams/sqm, all purpose. Available in a variety of heights, from 70 cm up to 200 cm.

Features:


An excellent surface treatment provides excellent impregnation (wettability) of this fibreglass cloth, with epoxy as well as polyester systems. This type of mesh is designed to remain in suspension longer than standard fibreglass cloth, resulting in far less resin consumption. Also suitable for natural and agglomerate marble, stone and onyx.

STRENGTHENING SYSTEMS

CODE	HEIGHT	PACKAGING	PCS PER CASE	PALLET SIZE
030 75 304	70 cm	300 metre rolls	9 rolls upright	100 x 120 x 100
030 75 306	80 cm	300 metre rolls	9 rolls upright	110 x 120 x 100
030 75 308	90 cm	300 metre rolls	9 rolls upright	120 x 120 x 100
030 75 310	100 cm	300 metre rolls	9 rolls upright	130 x 120 x 100
030 75 312	110 cm	300 metre rolls	9 rolls upright	140 x 120 x 100
030 75 314	120 cm	300 metre rolls	9 rolls upright	150 x 120 x 100
030 75 316	130 cm	300 metre rolls	9 rolls upright	160 x 120 x 100
030 75 318	140 cm	300 metre rolls	9 rolls upright	170 x 120 x 100
030 75 320	150 cm	300 metre rolls	9 rolls upright	180 x 120 x 100
030 75 322	160 cm	300 metre rolls	9 rolls upright	190 x 120 x 100
030 75 324	170 cm	300 metre rolls	9 rolls upright	200 x 120 x 100
030 75 326	180 cm	300 metre rolls	9 rolls upright	210 x 120 x 100
030 75 328	190 cm	300 metre rolls	9 rolls upright	230 x 120 x 100
030 75 330	200 cm	300 metre rolls	9 rolls upright	230 x 120 x 100

CODE	HEIGHT	PACKAGING	PCS PER CASE
030 80 001	120 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 004	130 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 007	140 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 010	150 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 013	160 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 016	170 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 019	180 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 022	190 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 025	200 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 028	210 cm	80 metre rolls	10 or 20 rolls (on request)
030 80 031	220 cm	80 metre rolls	10 or 20 rolls (on request)

CODE	HEIGHT	PACKAGING	PCS PER CASE
030 80 120	120 cm	40 metre rolls	10 or 20 rolls (on request)

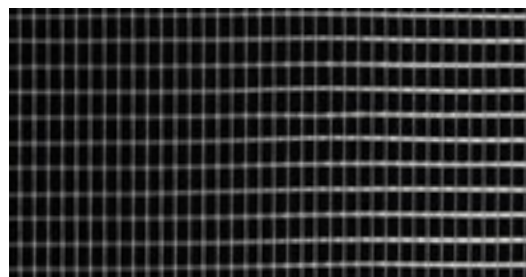

FIBREGLASS CLOTH 90 GR/SQM

Fibreglass cloth for slab reinforcement, 90 grams/sqm, all purpose. Available in a variety of heights, from 70 cm up to 200 cm.

Features:

An excellent surface treatment results in very good impregnation (wettability) of this fibreglass cloth, with epoxy as well as polyester systems. The peculiar anchoring of the weft thread offers improved holding strength. Also suitable for natural and agglomerate marble, stone and onyx.




FIBREGLASS WOVEN ROVING 500 GR/SMQ

Fibreglass woven roving for the reinforcement and consolidation of (including marble blocks). Also suited for bonding slabs together. Available in a variety of heights, from 120 cm up to 220 cm.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

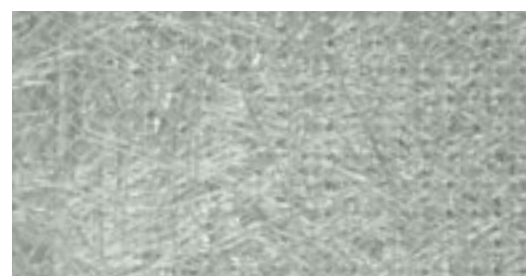

BONDED FIBREGLASS WOVEN ROVING 300/800 GR/SMQ

Fibreglass woven roving stitch-bonded to a MAT with 5 cm chopped strands. Thanks to its increased thickness, this product provides excellent holding strength and block-reinforcement properties. Available in 120 mm height only.

Features:

Also suitable for natural and agglomerate marble, stone and onyx.

Stone Care and Stone Installation

● Protectors	page 126
● Colour Enhancing Protectors	page 127
● Waxes	page 129
● Colour Intensifiers	page 132
● Cementitious Adhesives for the Installation of Stone	page 133

PROTECTORS THAT DO NOT ALTER THE NATURAL SURFACE COLOUR

CODE	COLOUR	PACKAGING/WEIGHT
025 15 030	transparent colourless	1 litre tin
025 15 035	transparent colourless	5 litre tin
025 15 040	transparent colourless	20 litre tin



DEFENDER

Water and oil repellent stain-proof impregnating protector for marble and granite. Natural effect. Particularly suited for gres porcellanato. Solvent based formulation for interior and exterior applications.

Suitable for use when you need a high level of protection without altering the natural colour of the stone.

Features:

Coverage: 15-30 sqm/litre

Shelf life: 24 months in original unopened container, 6 months after opening, if stored in a cool dry place.

CODE	COLOUR	PACKAGING/WEIGHT
025 15 005	transparent colourless	1 litre tin
025 15 010	transparent colourless	5 litre tin
025 15 020	transparent colourless	20 litre tin



PROTECTION

Water and oil repellent stain-proof impregnating protector for marble, granite and unglazed tiles. Natural effect. Provides excellent protection after a few hours. This product may result in a slight colour enhancing effect when applied to highly absorbing materials. Solvent based formulation, preferably for interior use.

Features:

Coverage: 15-25 sqm/litre

Shelf life: 24 months in original unopened container, 6 months after opening, if stored in a cool dry place.

PROTECTORS THAT DO NOT ALTER THE NATURAL SURFACE COLOUR

CODE	COLOUR	PACKAGING/WEIGHT
025 20 005	opalescent white	1 litre bottle
025 20 010	opalescent white	5 litre bottle
025 20 015	opalescent white	20 litre bottle



GUARDIAN

Water and oil repellent stain-proof impregnating protector for marble, granite, cementitious substrates, terracotta, masonry. Natural effect. Water based, low odour formulation for interior and exterior applications.

It does not contain synthetic solvents or other substances that are harmful to the environment and is not labelled as hazardous.

Features:

Coverage: 15-25 sqm/litre.

Shelf life: 12 months in original unopened container, 3 months after opening. Protect from frost and heat.

COLOUR ENHANCING PROTECTORS

CODE	COLOUR	PACKAGING/WEIGHT
025 15 100	transparent yellow	1 litre tin
025 15 105	transparent yellow	5 litre tin
025 15 110	transparent yellow	20 litre tin



RENOVA

Colour enhancing, water and oil repellent impregnating protector for marble and granite, ideal for sanded, brushed, bush-hammered, flamed and antique finishes.

Solvent based formulation preferably for interior use.

Features:

Coverage: 8-20 sqm/litre.

Shelf life: 24 months in original unopened container, 6 months after opening, if stored in a cool dry place.

COLOUR ENHANCING PROTECTORS

CODE	COLOUR	PACKAGING/WEIGHT
025 15 120	transparent yellow	1 litre tin
025 15 125	transparent yellow	5 litre tin
025 15 130	transparent yellow	20 litre tin



EPOQUE

Colour enhancing, water and oil repellent impregnating protector for absorbent marble, granite and agglomerates. Ideal for sanded, brushed, bush-hammered and flamed finishes, it can be used also on polished surfaces. Solvent based formulation designed specifically for exterior use, thanks to high colour fastness to light and excellent resistance to atmospheric agents.

This product needs to be applied in several coats, depending on absorption.

Features:

Coverage: 8-20 sqm/litre

Shelf life: 24 months in original unopened container, 6 months after opening, if stored in a cool dry place.

CODE	COLOUR	PACKAGING/WEIGHT
025 15 173	transparent colourless	1 litre tin



SELF-POLISH

Self-polishing enhancer developed specifically for granite. This product forms a very thin, highly transparent film, which enhances the natural colour of all granite surfaces, even if not perfectly honed.

COLOUR ENHANCING PROTECTORS

CODE	COLOUR	PACKAGING/WEIGHT
025 15 175	transparent colourless	1 litre tin
025 15 180	transparent colourless	5 litre tin
025 15 185	transparent colourless	20 litre tin



ULTRACOVER

Colour enhancing impregnating protector formulated specifically for granite. Ideal to cover small veins and micro-fissures. After application, leave it on the granite for 12 hours and then brush it off.

WAXES

CODE	TYPE	COLOUR	PACKAGING/WEIGHT
025 01 008	plus 2	transparent colourless	1 litre
025 01 010	plus 2	transparent colourless	5 litre
025 01 015	plus 2	transparent colourless	20 litre
025 01 017	plus 3	transparent colourless	5 litre
025 01 018	plus 3	transparent colourless	20 litre
025 01 021	plus 2	black	1 litre
025 01 020	plus 2	black	5 litre
025 01 025	plus 2	black	20 litre
025 01 027	plus 3	black	5 litre
025 01 028	plus 3	black	20 litre

CERA PLUS

"Cera Plus" is a solvent based wax designed to increase gloss, available in two types: Plus 2 for medium-porosity granite and Plus 3 for low-absorbency granite. As compared to Plus 2, Plus 3 has the advantage that it does not leave any white rings when applied with a waxing machine. Both types are available in black for dark granites.

Features:

This wax should be ideally applied with a waxing machine, but it can also be applied by hand.

WAXES

CODE	COLOUR	PACKAGING/WEIGHT
025 01 040	transparent colourless	1 litre
025 01 042	transparent colourless	5 litre
025 01 042	transparent colourless	20 litre

CERA ECOPLUS

"Cera Ecoplus" is a water based wax designed to increase the gloss of granite surfaces. It is odourless and solvent free.

Features:

This wax should be ideally applied with a waxing machine, but it can also be applied by hand.

COLOURING POWDERS FOR SOLVENT BASED WAXES

CODE	COLOUR	PACKAGING/WEIGHT
025 05 030	blue	500 cc
025 05 035	brown	500 cc
025 05 040	black	500 cc
025 05 045	red	500 cc

COLOURING POWDERS FOR SOLVENT BASED WAXES

Colouring powders for solvent based waxes, available in a variety of colours to suit all materials.

BRUSHES FOR WAXING MACHINES

CODE	OUTER DIAMETER	FILAMENT THICKNESS
025 03 010	Ø 400 mm	0.25 mm
025 03 012	Ø 400 mm	0.30 mm
025 03 014	Ø 400 mm	0.40 mm
025 03 016	Ø 400 mm	0.50 mm
025 03 022	Ø 400 mm	0.80 mm
025 03 024	Ø 400 mm	1.00 mm
025 03 026	Ø 400 mm	1,20 mm
025 03 038	Ø 400 mm	horsehair

**NYLON BRUSHES FOR WAXING MACHINES**

Nylon brushes for use with waxing machines. These brushes are designed to uniformly apply waxes and protectors on an automatic machine. Available with rigid PVC or wooden backing with nylon bristles embedded in it.

FELTS AND SPONGES FOR WAXING MACHINES

CODE	OUTER DIAMETER	COLOUR	UNIT WEIGHT
055 15 712	Ø 406 mm	white	Kg 7.404
055 15 722	Ø 406 mm	yellow	Kg 7.404
055 15 732	Ø 406 mm	brown	Kg 7.404
055 15 742	Ø 406 mm	black	Kg 7.404
055 15 752	Ø 406 mm	red	Kg 7.404
055 15 762	Ø 406 mm	green	Kg 7.404
055 15 713	Ø 432 mm	white	Kg 7.934
055 15 733	Ø 432 mm	brown	Kg 7.934
055 15 743	Ø 432 mm	black	Kg 7.934
055 15 753	Ø 432 mm	red	Kg 7.934
055 15 763	Ø 432 mm	green	Kg 7.934

**SYNTHETIC FIBRE FELTS FOR WAXING MACHINES**

Synthetic fibre felts for use with waxing machines. These felts are designed to uniformly apply waxes and protectors on an automatic machine, usually on the last two heads.

FELTS AND SPONGES FOR WAXING MACHINES

CODE	COLOUR
055 15 080	Ø 410 mm



VELCRO-BACKED SPONGE FOR WAXING MACHINES

Synthetic fibre felts for use with waxing machines. These felts are designed to uniformly apply waxes and protectors on an automatic machine, usually on the last two heads.

COLOUR INTENSIFIERS FOR DARK GRANITES

CODE	COLOUR	PACKAGING/WEIGHT
025 15 203	black	1 litre
025 15 205	black	5 litre
025 15 210	black	20 litre

CODE	COLOUR	PACKAGING/WEIGHT
025 15 203	black	1 litre
025 15 205	black	5 litre
025 15 210	black	20 litre

CODE	COLOUR	PACKAGING/WEIGHT
025 15 204	black	1 litre
025 15 206	black	5 litre
025 15 209	black	20 litre

ADRIABLACK

"Adriablack" is a solvent based colour intensifier designed to darken and unify the colour of medium- to high-porosity dark granites. Apply by hand with an appropriate roller and allow to dry for 24 hours. Then remove any excess with silicon carbide brushes with a fine grit (500 or higher) or with nylon brushes. It can also be rubbed off manually using ethyl alcohol, which offers the advantage that this enhancer can be used also on custom pieces (countertops, steps and so on).

DEEP BLACK

"Deep black" is a solvent based colour intensifier for black granites. When used on black granite surfaces with naturally occurring variations in colour, it will darken any white flakes and create a more uniform colour. Due to the remarkable geological differences among the different types of black granites, the effect of this product may vary and thus a preliminary test is recommended. Apply by hand with an appropriate roller and allow to dry for 24 hours. Then remove any excess with silicon carbide brushes with a fine grit (500 or higher) or with nylon brushes.

DEEP BLACK 2

"Deep black 2" is a solvent based colour intensifier for black granites. When used on black granite surfaces with naturally occurring variations in colour, it will darken any white flakes and create a more uniform colour. As compared to Deep Black, this product will produce deeper shades of black. Apply by hand with an appropriate roller and allow to dry for 24 hours. Then remove any excess with silicon carbide brushes with a fine grit (500 or higher) or with nylon brushes.

Stability Tests and Classification of Stones

Substrates must be absolutely dry and protected against rising dampness from below (approximately 3% moisture content, as measured with a silicon carbide moisture meter). It is imperative that you know very well the nature of the material you are going to install and its features (stainability, stability and so on), which must always be determined and supplied by the stone manufacturer.

Below are some examples of granites (≤ 2 cm thick), classified according to the entity of the dimensional variations measured:

Stone materials (≤ 2 cm thick) with deformations < 0.3 mm after 6 hours
GRANITE
Montorfano
Black granites
Red granites
Giallo Veneziano
Labrador
Adhesive recommended for use on a cured cementitious substrate * :
For stain-sensitive tiles $\geq 60 \times 60$ cm use SUPER 24
For stain-sensitive tiles $\leq 60 \times 60$ cm use Kedilstone
For non-stain-sensitive tiles $\geq 60 \times 60$ cm use Kedytop and Supercovers S1
For non-stain-sensitive tiles $\leq 60 \times 60$ cm use Kediflex
For mosaics, use Kedimos

* For installation over an existing surface, use Primerflex or Primer 205

CEMENTITIOUS ADHESIVES FOR THE INSTALLATION OF STONE

SUPER24

Two-component, quick-setting and drying cementitious adhesive for professional use. Suitable for fixing natural stones, marbles and granites, resin- and cement-based composite marbles, ceramic tiles and stoneware. Can be used on indoor floors and walls. Owing to its high deformability, it is the ideal adhesive for use with underfloor heating as well as on façades (double-spreading application method), in swimming pools and on top of existing coverings. Especially suitable for high-traffic areas. It is perfect for fixing recomposed and dimensionally stable stones. Classified as C2FT S1 adhesive (according to EN 12004 and EN 12002).

Coverage	3 - 8 Kg/m ² .
Open time	20 min.
Time before grouting	4 to 6 hrs on floors. 2 hrs on walls.
Storage	12 months in a dry place in its original packaging.

CODE	COLOUR	PACKAGING/ WEIGHT	PALLET
080 40 270	Grey	25 Kg Bag	1.500 Kg
080 40 280	Extra white	25 Kg Bag	1.500 Kg
080 40 275	Latex	6 Kg Can	360 Kg
	Grey	(a+b)	
	Extra white	(a+b)	



KEDILSTONE

Extra-white, quick-drying, vertical creep resistant, thixotropic cementitious adhesive with high polymer content, suitable for fixing natural stone (as long as moisture-stable) and all types of porcelain and ceramic tiles. Can be used on indoor and outdoor floors and walls, on cement screeds and plasters, on top of existing floors, in high-traffic areas, in swimming pools, on aerated concrete blocks (indoor use only) and concrete structures (completely cured), as well as on substrates waterproofed with KEDILASTIC or ISOLFLEX range. It can also be used on anhydride screeds, gypsum board walls and plasterboard panels previously primed with APPREX G. Classified as C2FT adhesive (according to EN 12004).

Coverage	3 - 5 Kg/m ² .
Open time	20 min.
Time before grouting	4 to 6 hrs on floors. 2 hrs on walls.
Storage	12 months in a dry place in its original packaging.

CODE	COLOUR	PACKAGING WEIGHT	PALLET
080 40 290	Extra white	25 Kg Bag	1.500 Kg



For detailed information on installation and grouting methods, please see KEDIL catalogue on www.kedil.eu

KEDYTOP

Thixotropic, vertical creep resistant cementitious adhesive with excellent workability properties, extended open time and high polymer content, for professional use. Available in white or grey. Suitable for fixing (including by thick-bed method) porcelain tiles and all types of ceramic and stone materials, as long as moisture-stable. Especially suitable for fixing large-sized tiles, including on not perfectly flat substrates (up to 15 mm adhesive thickness). KEDYTOP can be used on indoor and outdoor floors and walls, on cement plasters and screeds, on top of existing floors, on heating screeds and foamed cement blocks (interior use only), in high-traffic areas, in swimming pools, on concrete structures (completely cured), as well as on substrates waterproofed with KEDILASTIC or ISOLFLEX range. It can also be used on anhydrite screeds, gypsum board walls and plasterboard panels previously primed with APPREX G. Classified as C2TE S1 adhesive (according to EN 12004 and EN 12002).

Coverage	3 - 5 Kg/m ² .
Open time	30 min.
Time before grouting	24 to 36 hrs on floors. 4 to 6 hrs on walls.
Storage	12 months in a dry place in its original packaging.

CODE	COLOUR	PACKAGING/ WEIGHT	PALLET
080 40 190	Grey	25 Kg Bag	1.500 Kg
080 40 210	White	25 Kg Bag	1.500 Kg



KEDIFLEX

Thixotropic, vertical creep resistant cementitious adhesive with extended open time and high polymer content, for professional use, available in white or grey. Suitable for fixing porcelain tiles and all types of ceramic and stone materials, as long as moisturestable. KEDIFLEX can be used on indoor and outdoor floors and walls, on cement plasters and screeds, on top of existing floors, on heating screeds and aerated concrete blocks (indoor use only), in high-traffic areas, in swimming pools, on concrete structures (completely cured), as well as on substrates waterproofed with KEDILASTIC or ISOLFLEX range. It can also be applied to anhydrite screeds, gypsum board walls and plasterboard panels previously primed with APPREX G. Classified as C2TE adhesive (according to EN 12004).

Coverage	3 - 5 Kg/m ² .
Open time	30 min.
Time before grouting	24 to 36 hrs on floors. 4 to 6 hrs on walls.
Storage	12 months in a dry place in its original packaging.

CODE	COLOUR	PACKAGING/ WEIGHT	PALLET
080 40 140	Grey	25 Kg Bag	1.500 Kg
080 40 150	White	25 Kg Bag	1.500 Kg
080 40 155	White	4x5 Kg Pack.	360 Kg




For detailed information on installation and grouting methods, please see KEDIL catalogue on www.kedil.eu

KEDYMOS

Extra-white, thixotropic cementitious adhesive with extended open time, for professional use. Ideal for glass mosaics and all types of ceramic and stone mosaics. Can be used on indoor and outdoor floors and walls, on cement screeds and plasters and in swimming pools. To fix mesh-mounted mosaics in swimming pools, dilute with ADIFLEX and water in a 1:1 ratio. Classified as C2FT adhesive (according to EN 12004).

Coverage	2 - 4 Kg/m ² .
Open time	30 min.
Time before grouting	24 to 36 hrs on floors. 4 to 6 hrs on walls.
Storage	12 months in a dry place in its original packaging.

CODE	COLOUR	PACKAGING/ WEIGHT	PALLET
080 40 310	Extra White	25 Kg Bag	1.500 Kg

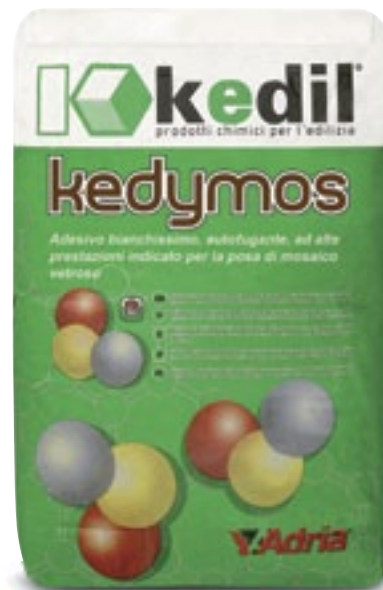**SUPERCOVER 1S**

High-performance, self-wetting, semi-fast setting cementitious adhesive with high elasticity, ideal for fixing thin, fragile and large-format materials to floors. Suitable for fixing large-sized ceramic and porcelain tiles and natural stones (as long as moisture-stable). Does not require application on two surfaces. Can be used on indoor and outdoor floors and also on anhydrite screeds, as long as they are previously treated with APPREX G.

Ideal for use on existing floors, heating screeds and in high-traffic, high-stress areas. SUPERCOVER 1S is also excellent for smoothing out irregularities up to 15 mm. Classified as C2E SI adhesive according to EN12004 and 12002.

Coverage	1,5 Kg/m ² .
Open time	30 min.
Time before grouting	112 to 24hrs on floors. 2hrs on walls.
Storage	12 months in a dry place in its original packaging.

CODE	COLOUR	PACKAGING/ WEIGHT	PALLET
080 40 240	Grey	25 Kg Bag	1.500 Kg



PRIMERFLEX

One-component primer for cementitious or paste waterproofing membranes. Made of acrylic resins in organic solvent dispersion. Promotes adhesion for Isolflex and Kedilastic products before application on bituminous membranes, old tiles, vinyl floorings.

Coverage

200 - 300 g/m² depending on the absorbing capacity of the substrate.

Pot life

2 hours

Storage

12 months in a dry place and in its original packaging.



CODE	COLOUR	PACKAGING/ WEIGHT	PALLET
080 30 105	White	5 Kg Bucket	400 Kg

PRIMER 205

One-component adhesion promoter, epoxy resins based in water dispersion. Suitable for smooth and low-absorbent substrates, to be used before application of leveling compounds and cementitious adhesives.

Coverage

100 - 150 g/m² depending on the substrate

Pot life

4 hours

Storage

12 months in a dry place and in its original packaging, away from frost and high temperatures.



CODE	COLOUR	PACKAGING/ WEIGHT	PALLET
080 20 260	Green	1 Kg Canister	288 Kg
080 40 265	Green	5 Kg Can	400 Kg

For detailed information on installation and grouting methods, please see KEDIL catalogue on www.kedil.eu

[illegible]

[illegible]

ORGANIZZAZIONE VENDITE DIRETTE

DIRECT SALES NETWORK

GREECE:

ADRIA HELLAS LTD
KEFALLINIAS, 4
65300 KAVALA – GREECE
Tel. e fax: +30-2510-225454

TURKEY:

ADRIA ABRASIV ITH. VE. TIC. LTD. STI.
MUSTAFA KEMAL MAHALLESİ 2140 SK. N° 3/3
ESKİŞEHİRYOLU, ÇANKAYA
06520 ANKARA - TÜRKİYE
Tel.: +90-312-219.5557
Fax: +90-312-219.5728
ansen@abrasiviadria.com

SPAIN:

ADRIA ABRASIVOS S.L.
CTRA. ATIOS - SALCEDA, KM. 0,2
36400 PORRINO – PONTEVEDRA - ESPAÑA
Tel.: +34-986-344440
Fax: +34-986-344715
info@adriaabrasivos.es

INDIA:

ADRIA (INDIA) STONE-TECH PRIVATE LIMITED
71-A, (WING 2),
SIPCOT INDUSTRIAL COMPLEX ,PHASE 1
KRISHNAMGIRI DISTRICT. HOSUR - 635 126
Tel. + 91 04344275134
adria@adriaindia.com

POLAND:

ADRIA POLSKA SP. Z.O.O.
UL. TAMA POMORZANSKA, 5
70-030 SZCZECIN – POLAND
Tel. e fax: +48-91-4343852
info@adriapolska.pl

USA:

ADRIA U.S.A. INC.
681 MAIN ST. BLDG 31
07109 BELLEVILLE, NJ
Tel. 973-751-3500
Fax. 973-751-3501
info@adriausa.net

BRAZIL:

ADRIA BRASIL IMPORTACAO E EXPORTACAO LTDA
Av. Central B, 233, CIVIT II, Serra – ES – Brasil
Cep: 29168-071
Phone/Fax: + 55 27 32185558
adriabrasil@abrasiviadria.com